


**Linear light OLE RLL-24P**


|            |                                                       |            |            |
|------------|-------------------------------------------------------|------------|------------|
| CCT        | 2700K-5700K                                           | RGB        | RGBW       |
| Power      | 15W                                                   | 15W        | 15W        |
| Beam Angle | 120°                                                  | 120°       | 120°       |
| Protection | IP66                                                  | IP66       | IP66       |
| Voltage    | DC24/48V                                              | DC24/48V   | DC24/48V   |
| Weight     | 0.6KG                                                 | 0.6KG      | 0.6KG      |
| Efficacy   | 27-32 lm/W                                            | 16-17 lm/W | 19-20 lm/W |
| Color      | Graphite Black, Iron Grey, Signal White, Signal Green |            |            |

**Dimension**

Flat Bracket

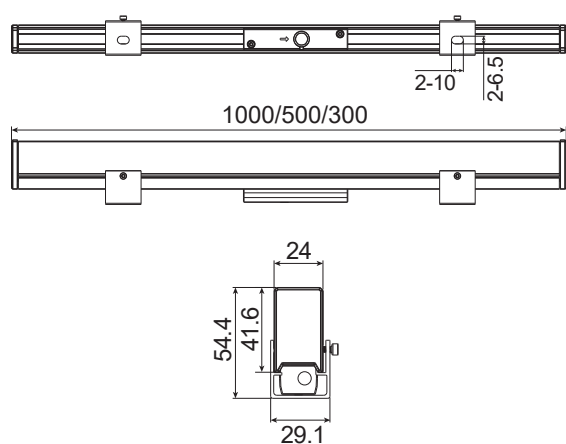


Clip Bracket

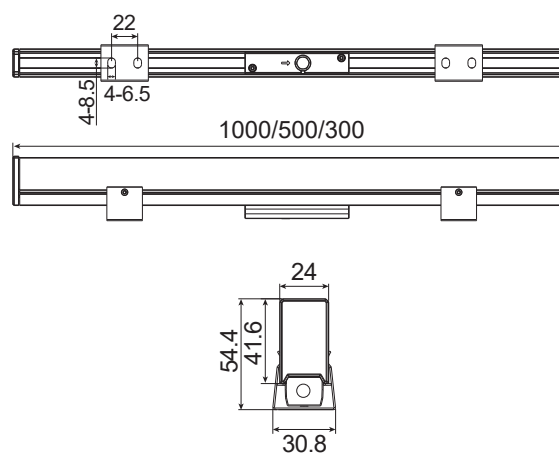




## Dimension


### Flat Bracket

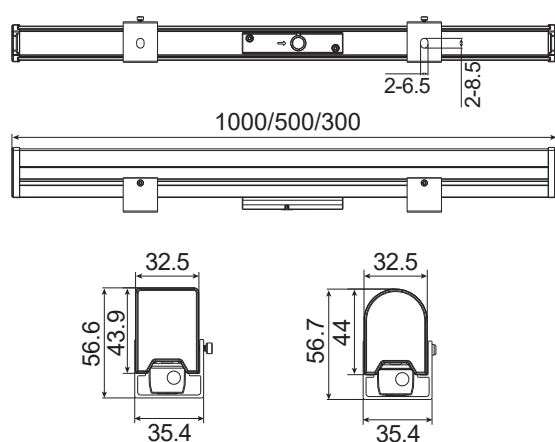

### Clip Bracket

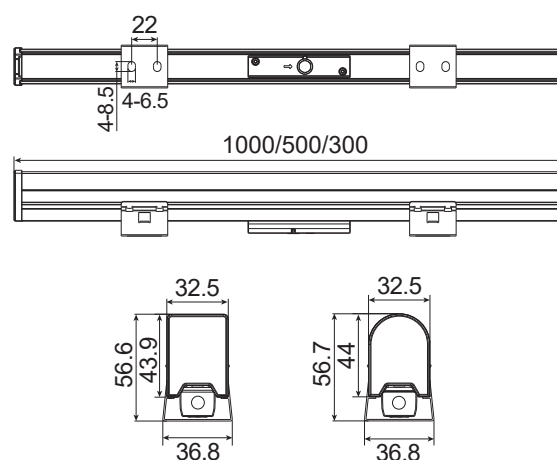


### Rotate Bracket

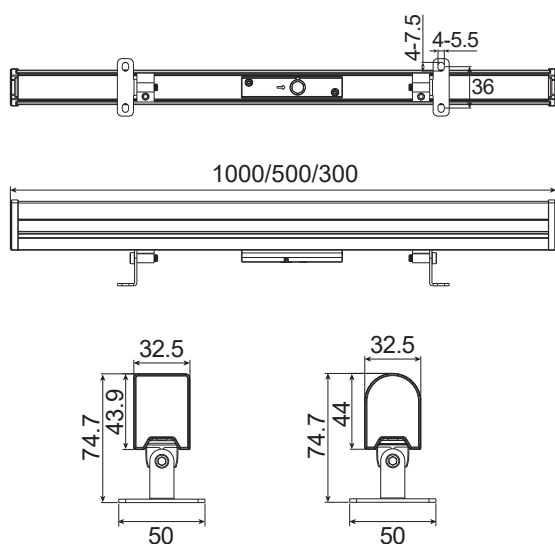

## Linear light OLE RCL-30P

| CCT        | 2700K-5700K                                           | RGB        | RGBW       |
|------------|-------------------------------------------------------|------------|------------|
| Power      | 15W                                                   | 15W        | 15W        |
| Beam Angle | 150°                                                  | 150°       | 150°       |
| Protection | IP66                                                  | IP66       | IP66       |
| Voltage    | DC24/48V                                              | DC24/48V   | DC24/48V   |
| Weight     | 0.7KG                                                 | 0.7KG      | 0.7KG      |
| Efficacy   | 33-40 lm/W                                            | 16-17 lm/W | 19-20 lm/W |
| Color      | Graphite Black, Iron Grey, Signal White, Signal Green |            |            |

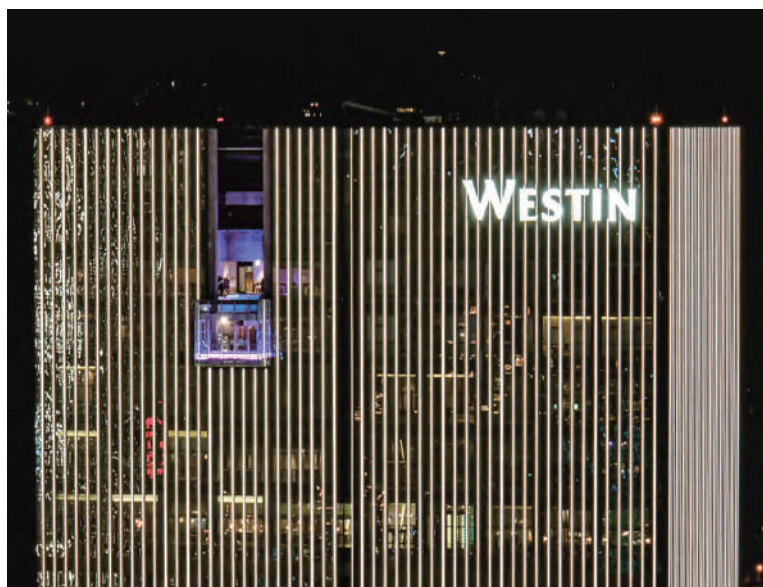

**Linear light OLE RCL-22P**

|            |                                                       |          |            |
|------------|-------------------------------------------------------|----------|------------|
| CCT        | 2700K-5700K                                           | RGB      | RGBW       |
| Power      | 12W                                                   | 12W      | 12W        |
| Control    | DMX512                                                | DMX512   | DMX512     |
| Beam Angle | 120°                                                  | 120°     | 120°       |
| Protection | IP65                                                  | IP65     | IP65       |
| Voltage    | DC24/48V                                              | DC24/48V | DC24/48V   |
| Weight     | 0.82KG                                                | 0.82KG   | 0.82KG     |
| Efficacy   | 26-32 lm/W                                            | 7-8 lm/W | 10-15 lm/W |
| Color      | Graphite Black, Iron Grey, Signal White, Signal Green |          |            |

**Dimension**