



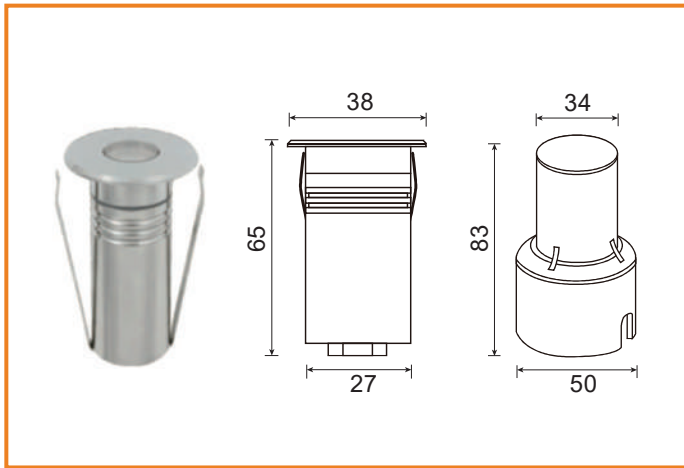


OLE-D111930

Power	1.5W
Input Voltage	DC24V
CCT	3000K, 4000K
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	1
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

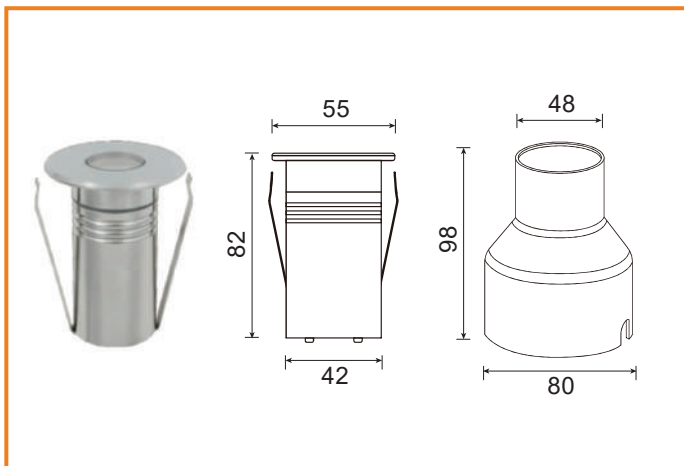


OLE-D111931

Power	2W
Input Voltage	DC24V
CCT	3000K, 4000K
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	1
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

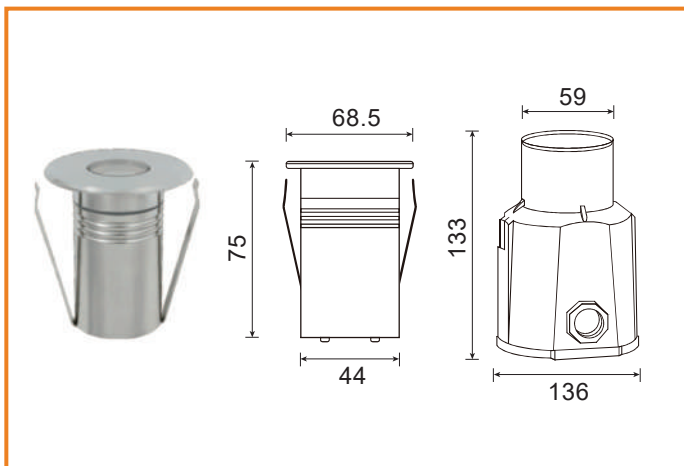


OLE-D111932

Power	2W
Input Voltage	DC24V
CCT	3000K, 4000K
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	1
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

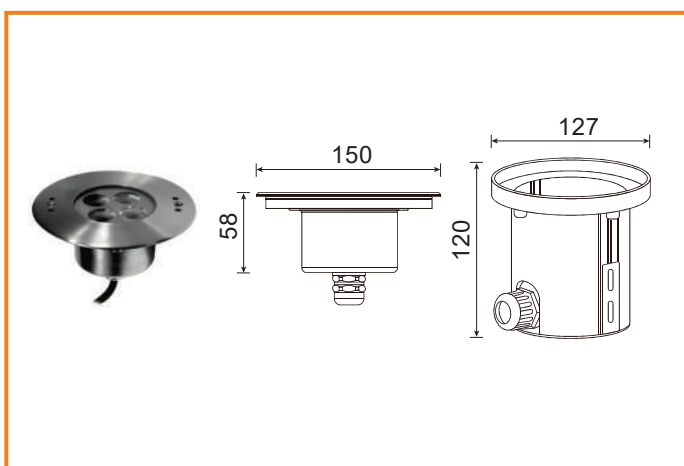


OLE-D111935

Power	8W, 12W, 16W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	4
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

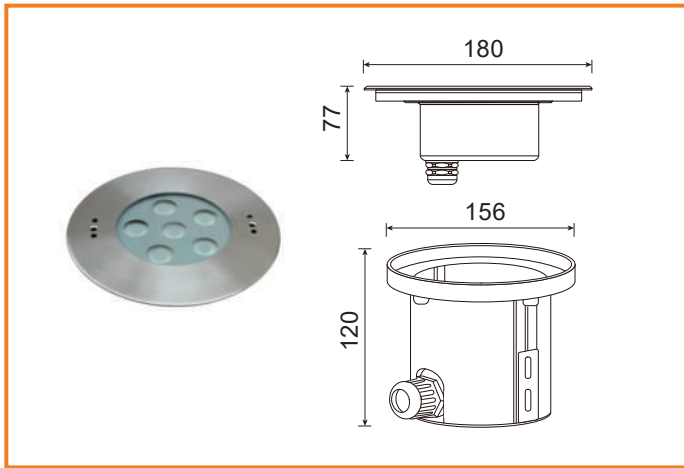


OLE-D111936

Power	12W, 18W, 24W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	6
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

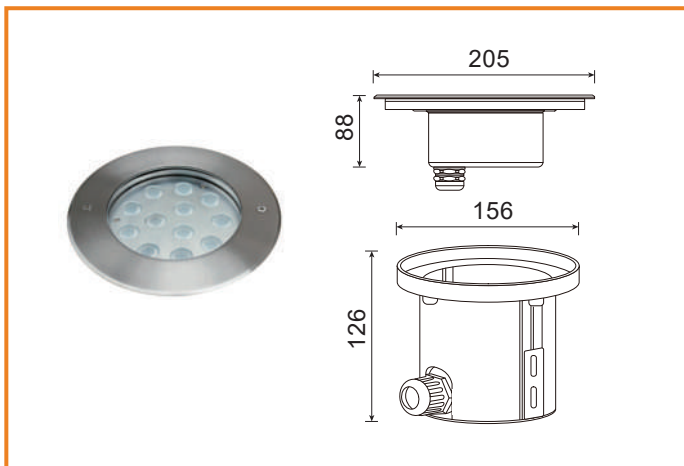


OLE-D111941

Power	24W, 36W, 48W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	12
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

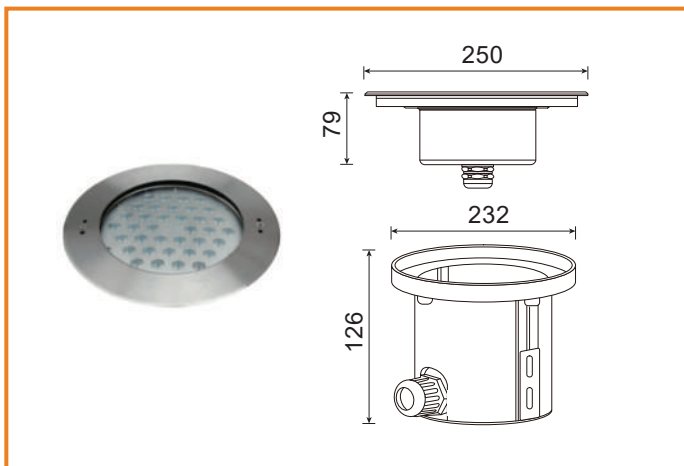


OLE-D111945

Power	36W, 54W, 72W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	18
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

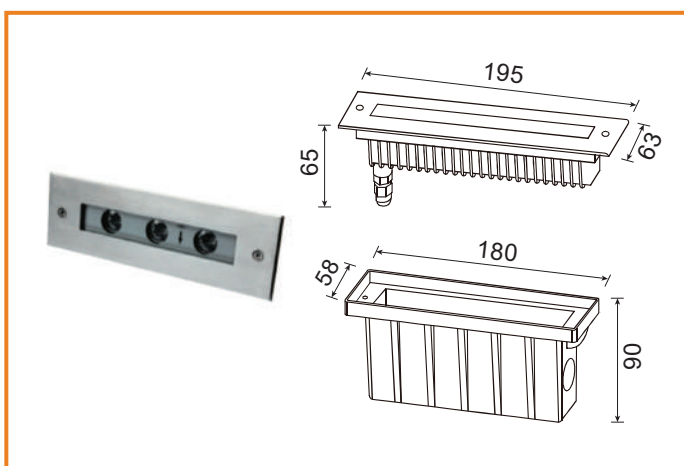


OLE-D111947

Power	6W, 9W, 12W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	3
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

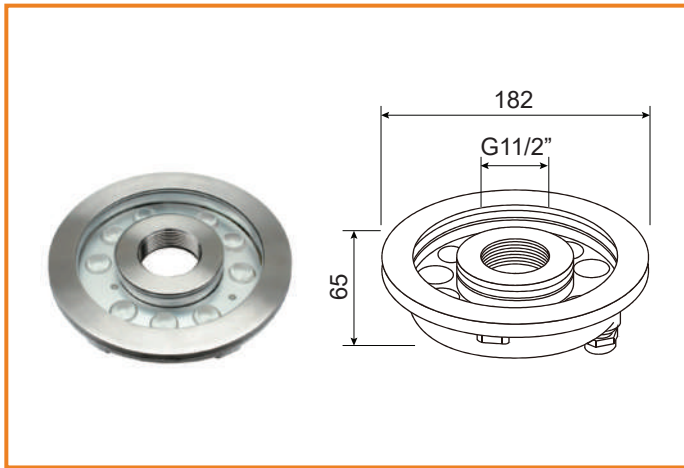


OLE-Q112211

Power	18W, 27W, 36W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	9
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

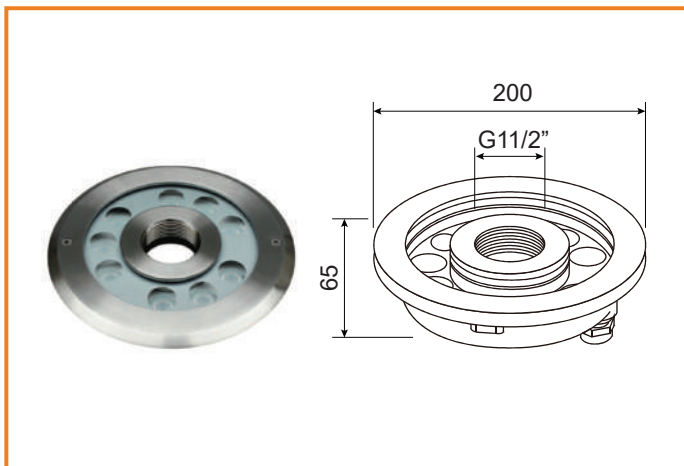


OLE-Q112212

Power	18W, 27W, 36W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	9
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

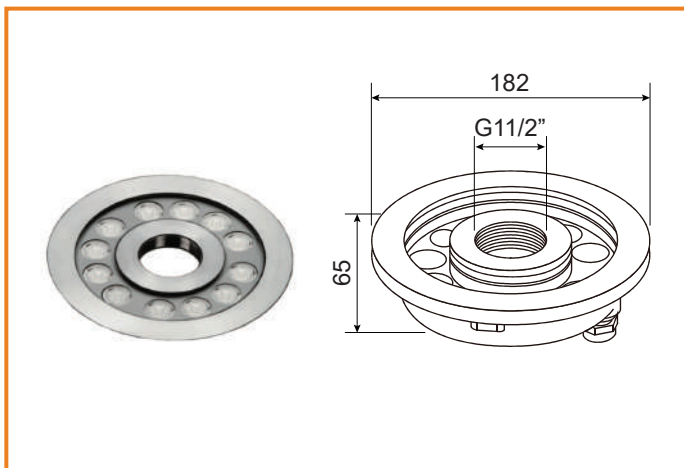

OLE-Q112213

Power	24W, 36W, 48W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	12
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

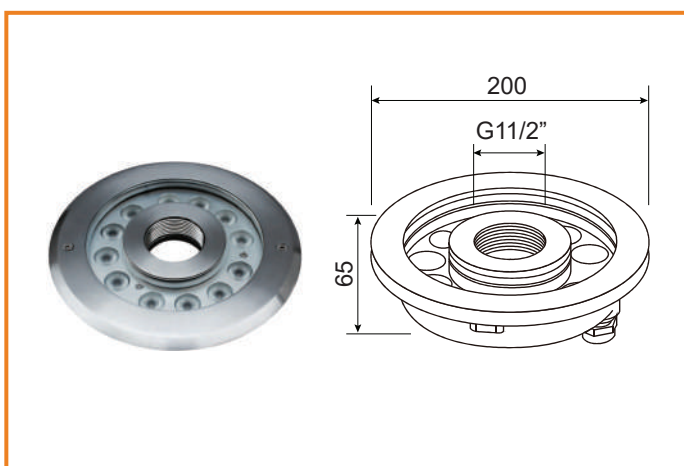

OLE-Q112214

Power	24W, 36W, 48W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	12
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve