



Since 1993

LED OUTDOOR LIGHTING CATALOGUE 2026

www.oversealighting.com



CONTENTS

LED AMENITY LIGHT	02
LED BOLLARD LIGHT	13
LED SPOT LIGHT	26
LED INGROUND LIGHT	34
LED LINEAR LIGHT	37
LED WALL WASHER	41
LED PIXEL LIGHT	45
LED STRIP LIGHT	49
LED STRIP WATER LIGHT	52
LED WALL LIGHT	54
LED STEP LIGHT	57
RECESSED UNDERWATER LIGHT	62
OUTDOOR PROJECTION LIGHT	66




LED AMENITY LIGHT


Landscape Lighting



Dimension

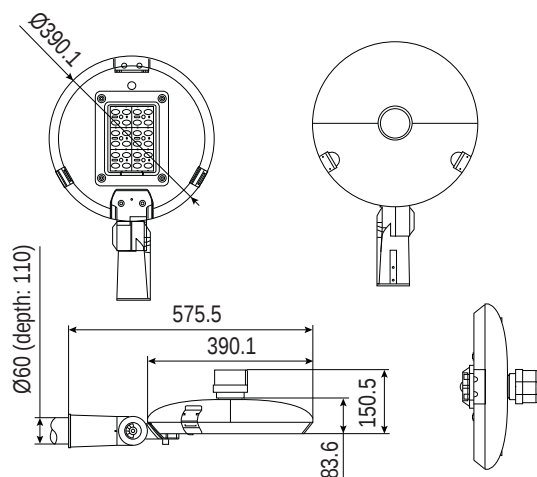

Dimension

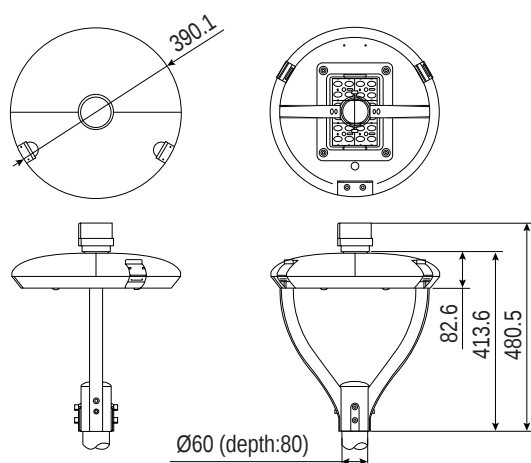

OLE-AVENUE-S-A

Power	30W, 50W, 60W, 75W, 100W
Housing	High pressure die-casting aluminum
Efficiency	165lm/W
Lens	Type I / Type II / Type III / Type IV / Type V
Protector	Super white tempered glass
Housing Color	Grey / black (default), other color (available on request)
Protection	IP66
Impact Resistance	IK08
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K
Height Recommended	3~10

Details



OLE-AVENUE-S-D


Power	30W, 50W, 60W, 75W, 100W
Housing	High pressure die-casting aluminum
Efficiency	165lm/W
Lens	Type I / Type II / Type III / Type IV / Type V
Protector	Super white tempered glass
Housing Color	Grey / black (default), other color (available on request)
Protection	IP66
Impact Resistance	IK08
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K
Height Recommended	3~10

Details






Dimension

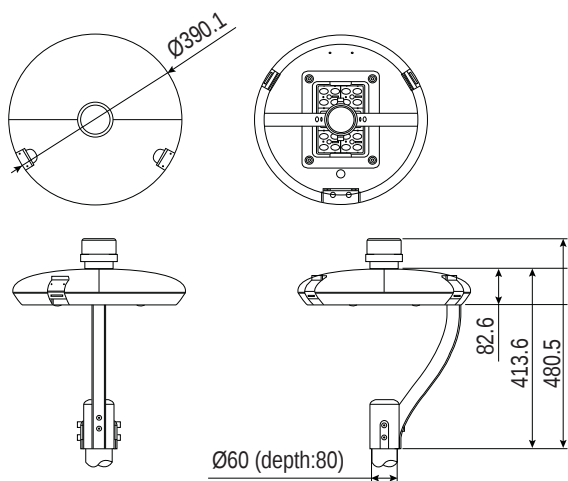

Dimension

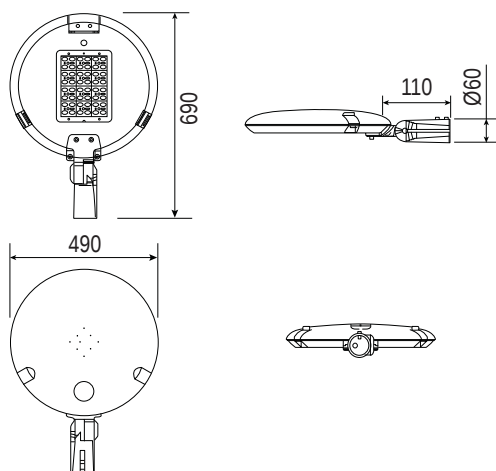

OLE-AVENUE-S-C

Power	30W, 50W, 60W, 75W, 100W
Housing	High pressure die-casting aluminum
Efficiency	165lm/W
Lens	Type I / Type II / Type III / Type IV / Type V
Protector	Super white tempered glass
Housing Color	Grey / black (default), other color (available on request)
Protection	IP66
Impact Resistance	IK08
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K
Height Recommended	3~10

Details



OLE-AVENUE-A


Power	30W, 40W, 50W, 60W, 70W, 100W, 120W, 150W
Housing	High pressure die-casting aluminum
Efficiency	165lm/W
Lens	Type I / Type II / Type III / Type IV / Type V
Protector	Super white tempered glass
Housing Color	Grey / black (default), other color (available on request)
Protection	IP66
Impact Resistance	IK08
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K
Height Recommended	3~15

Details





Dimension

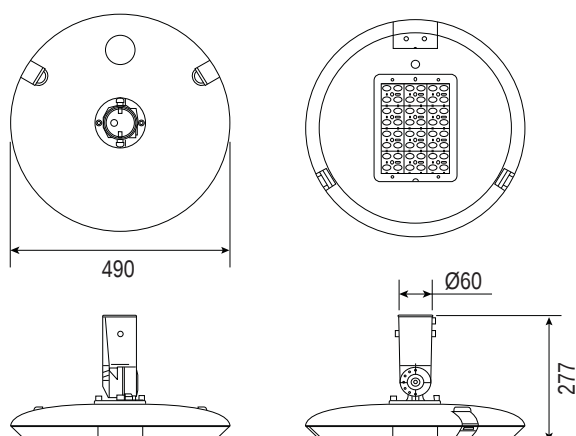


OLE-AVENUE-B

Power	30W, 40W, 50W, 60W, 70W, 100W, 120W, 150W
Housing	High pressure die-casting aluminum
Efficiency	165lm/W
Lens	Type I / Type II / Type III / Type IV / Type V
Protector	Super white tempered glass
Housing Color	Grey / black (default), other color (available on request)
Protection	IP66
Impact Resistance	IK08
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K
Height Recommended	3~15

Details




Dimension

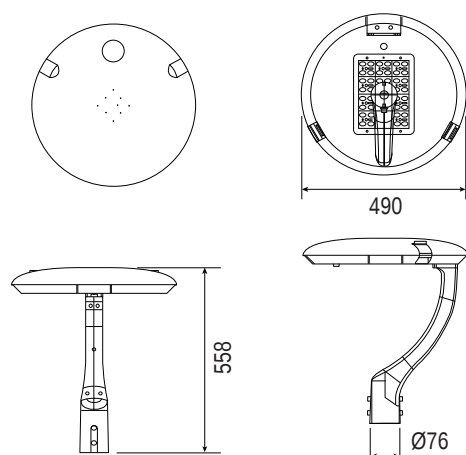

OLE-AVENUE-C


Power	30W, 40W, 50W, 60W, 70W, 100W, 120W, 150W
Housing	High pressure die-casting aluminum
Efficiency	165lm/W
Lens	Type I / Type II / Type III / Type IV / Type V
Protector	Super white tempered glass
Housing Color	Grey / black (default), other color (available on request)
Protection	IP66
Impact Resistance	IK08
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K
Height Recommended	3~15

Details

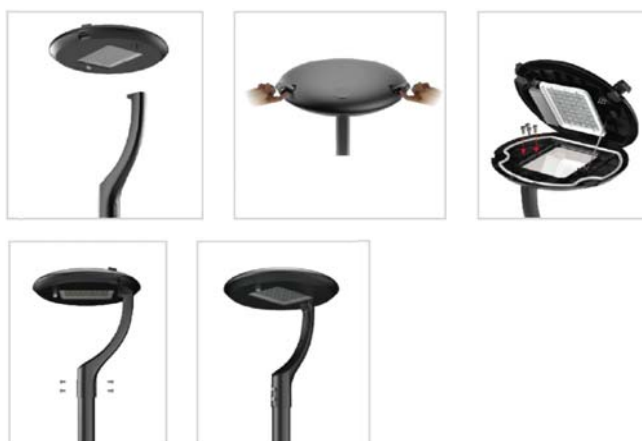




Dimension

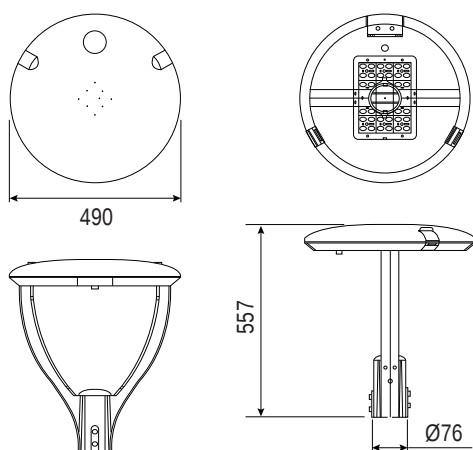


Dimension

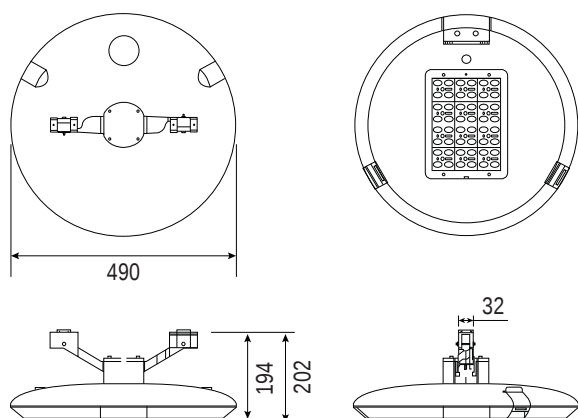

OLE-AVENUE-D

Power	30W, 40W, 50W, 60W, 70W, 100W, 120W, 150W
Housing	High pressure die-casting aluminum
Efficiency	165lm/W
Lens	Type I / Type II / Type III / Type IV / Type V
Protector	Super white tempered glass
Housing Color	Grey / black (default), other color (available on request)
Protection	IP66
Impact Resistance	IK08
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K
Height Recommended	3~15

Details

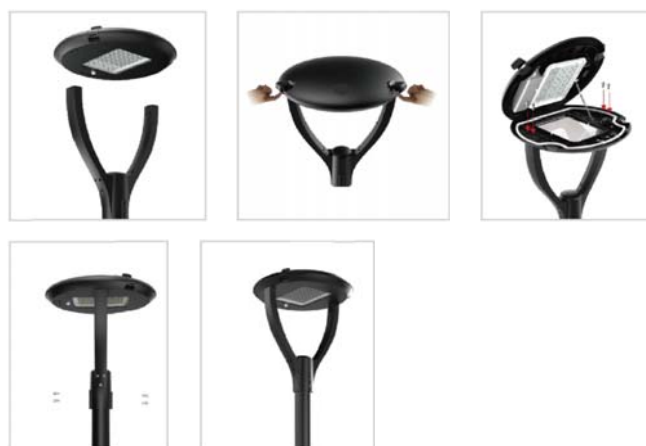

OLE-AVENUE-E

Power	30W, 40W, 50W, 60W, 70W, 100W, 120W, 150W
Housing	High pressure die-casting aluminum
Efficiency	165lm/W
Lens	Type I / Type II / Type III / Type IV / Type V
Protector	Super white tempered glass
Housing Color	Grey / black (default), other color (available on request)
Protection	IP66
Impact Resistance	IK08
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K
Height Recommended	3~15

Details



**OLE-1001**

Power	30W, 40W, 60W, 75W, 100W, 120W, 150W, 180W
Material	Die-casting aluminum
Efficiency	130lm/W
Size	590*590*600 (30 - 120W), 710*710*750 (120 - 200W)
Led	LUMILEDS or CREE
Impact Resistance	IK08
Protection	IP66
Power Factor	>0.95

**OLE-1001D**

Power	30W, 40W, 60W, 75W, 100W, 120W
Material	Die-casting aluminum
Efficiency	130lm/W
Size	590*590*980
Led	LUMILEDS or CREE
Impact Resistance	IK08
Protection	IP66
Power Factor	>0.95

**OLE-1007**

Power	30W, 40W, 60W, 75W, 100W
Material	Die-casting aluminum
Efficiency	150lm/W
Size	400*400*800
Led	LUMILEDS or CREE
Impact Resistance	IK08
Protection	IP65
Power Factor	>0.95

**OLE-1009**

Power	30W, 50W, 60W, 75W
Material	Die-casting aluminum
Efficiency	130lm/W
Size	598*598*391
Led	LUMILEDS or CREE
Impact Resistance	IK08
Protection	IP65
Power Factor	>0.95



OLE-1010

Power	30W, 50W, 60W
Material	Die-casting aluminum
Efficiency	130lm/W
Size	550*550*400
Led	LUMILEDS or CREE
Impact Resistance	IK08
Protection	IP66
Power Factor	>0.95



OLE-1013

Power	30W, 50W, 60W, 75W
Material	Die-casting aluminum
Efficiency	130lm/W
Size	650*650*674
Led	LUMILEDS or CREE
Impact Resistance	IK08
Protection	IP66
Power Factor	>0.95



OLE-1026

Power	30W, 40W, 50W, 60W, 75W, 100W
Material	Die-casting aluminum
Efficiency	130lm/W
Size	650*650*674
Led	LUMILEDS or CREE
Impact Resistance	IK08
Protection	IP66
Power Factor	>0.95




OLE-1028

Power	30W, 50W, 60W, 75W
Material	Die-casting aluminum
Efficiency	130lm/W
Size	690*690*480
Led	LUMILEDS or CREE
Impact Resistance	IK08
Protection	IP66
Power Factor	>0.95

**OLE-1112**

Power	30W, 40W, 50W, 60W
Material	Die-casting aluminum
Efficiency	130lm/W
Size	595*595*465
Led	LUMILEDS or CREE
Impact Resistance	IK08
Protection	IP66
Power Factor	>0.95

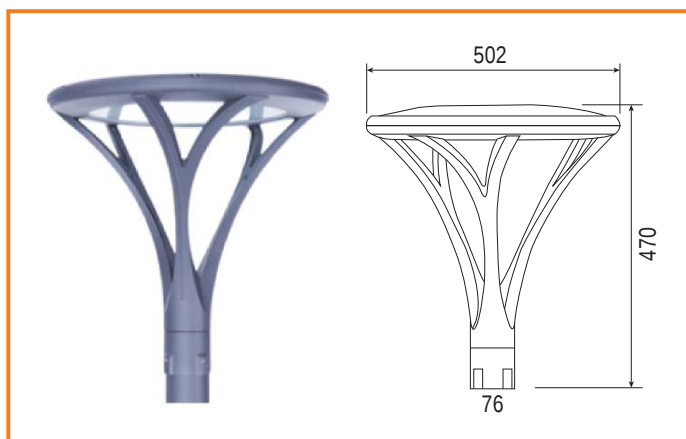**OLE-1032**

Power	30W, 50W, 60W, 75W
Material	Die-casting aluminum
Efficiency	130lm/W
Size	502*502*470
Led	LUMILEDS or CREE
Impact Resistance	IK08
Protection	IP66
Power Factor	>0.95

**OLE-1024**

Power	30W, 50W, 60W, 75W
Material	Die-casting aluminum
Efficiency	130lm/W
Size	515*515*560
Led	LUMILEDS or CREE
Impact Resistance	IK08
Protection	IP66
Power Factor	>0.95



Dimension




Dimension



OLE-JKC-J20

Power	20W (Life Time: 100,000 hours)
Lumen	2000 lm
CCT	2700K - 6500K
LifePO4 Battery	153.6Wh 12.8V (Life Time: 8-10 years)
Solar Panel	18V 30W Imported High Efficiency Monocrystalline Silicon (Life Time: 25 years)
Mounting Height	3 - 4m (Suggest install between space 10 - 14m)
Solar Charge Time	7 hours by bright sunlight
Cloudy/Rainy days	3 Cloudy / Rainy days
Lighting Mode	5 hours 100% Brightness + 7 hours 25% Dim Light
Net Weight	6 KG

Details



High Efficiency
Mono-Silicon Solar Panel
IP65 Waterproof Level
PV Efficiency > 19%



High Efficiency
LED Chip
High Brightness
Bridgelux Chips




Aluminum Alloy Case
Anodic Oxidation Process
High Class Aluminum

OLE-JKC-J30

Power	30W (Life Time: 100,000 hours)
Lumen	3000 lm
CCT	2700K - 6500K
LifePO4 Battery	384Wh 12.8V (Life Time: 8-10 years)
Solar Panel	18V 40W Imported High Efficiency Monocrystalline Silicon (Life Time: 25 years)
Mounting Height	3 - 5m (Suggest install between space 10 - 17m)
Solar Charge Time	7 hours by bright sunlight
Cloudy/Rainy days	3 Cloudy / Rainy days
Lighting Mode	5 hours 100% Brightness + 7 hours 25% Dim Light
Net Weight	8.5 KG

Details



High Efficiency
Mono-Silicon Solar Panel
IP65 Waterproof Level
PV Efficiency > 19%



High Efficiency
LED Chip
High Brightness
Bridgelux Chips



Aluminum Alloy Case
Anodic Oxidation Process
High Class Aluminum




Dimension



OLE-JKC-J50

Power	50W (Life Time: 100,000 hours)
Lumen	5000 lm
CCT	2700K - 6500K
LifePO4 Battery	460.8Wh 12.8V (Life Time: 8-10 years)
Solar Panel	18V 50W Imported High Efficiency Monocrystalline Silicon (Life Time: 25 years)
Mounting Height	4 - 6m (Suggest install between space 14 - 21m)
Solar Charge Time	7 hours by bright sunlight
Cloudy/Rainy days	3 Cloudy / Rainy days
Lighting Mode	5 hours 100% Brightness + 7 hours 25% Dim Light
Net Weight	11 KG

Details



High Efficiency
Mono-Silicon Solar Panel
IP65 Waterproof Level
PV Efficiency > 19%



High Efficiency
LED Chip
High Brightness
Bridgelux Chips



Aluminum Alloy Case
Anodic Oxidation Process
High Class Aluminum





OLE HELIO


Power	50W, 60W
CCT	2200K - 6500K
Efficiency	200lm/W
Solar Panel	Monocrystalline Silicon - 110W/18V
Battery	LiFePO4 Lithium Battery (A-level cell)
Controller	MPPT (with the time/light/sensor dimming)
Charge Time	5 Hours
Discharge Time	Over 3 nights
Standard	IP66, IK09
Mounting Height	3 - 6M, Diameter 60MM



Details



Dimension

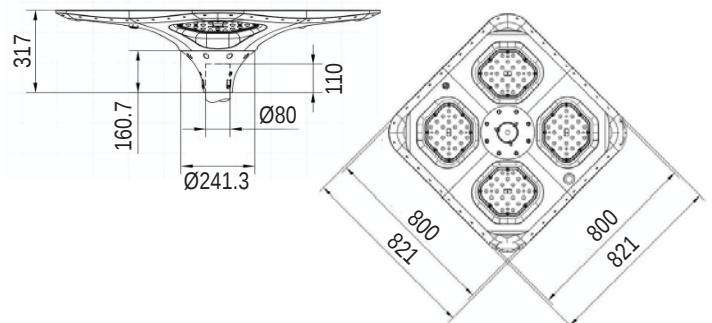



LED BOLLARD LIGHT

Landscape Lighting

**OLE-PH-024RA-P20**

Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum, real wood
Diffuser	Clear PMMA
Dimension	170*800 mm
Efficiency	130lm/W - 150lm/W

**OLE-PH-024RB-P20-800**


Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum, real wood
Diffuser	Clear PMMA
Dimension	170*800 mm
Efficiency	130lm/W - 150lm/W

**OLE-PH-024RB-P20-1000**

Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum, real wood
Diffuser	Clear PMMA
Dimension	170*1000 mm
Efficiency	130lm/W - 150lm/W

**OLE-PE-024RW-P20**

Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum, real wood
Diffuser	Clear PMMA
Dimension	150*800 mm
Efficiency	130lm/W - 150lm/W

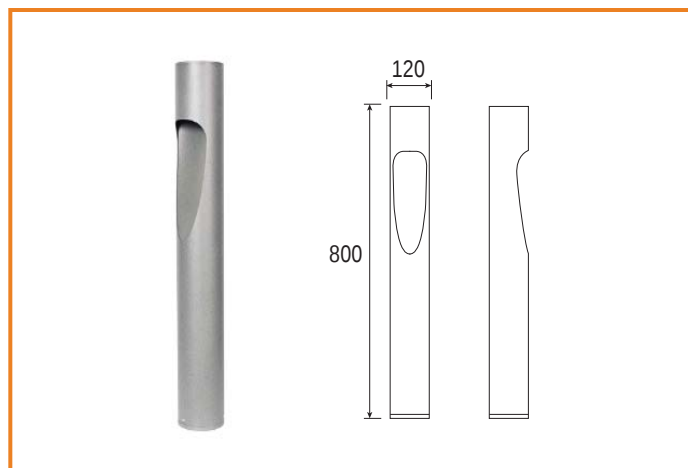**OLE-PD-015-P10**

Power	10W
Chip	Cree
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	120*800 mm
Efficiency	130lm/W - 150lm/W

**OLE-PH-024A-P20**


Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	170*800 mm
Efficiency	130lm/W - 150lm/W

**OLE-PH-024B-P20-800**


Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	170*800 mm
Efficiency	130lm/W - 150lm/W

**OLE-PH-024B-P20-1000**


Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	170*1000 mm
Efficiency	130lm/W - 150lm/W

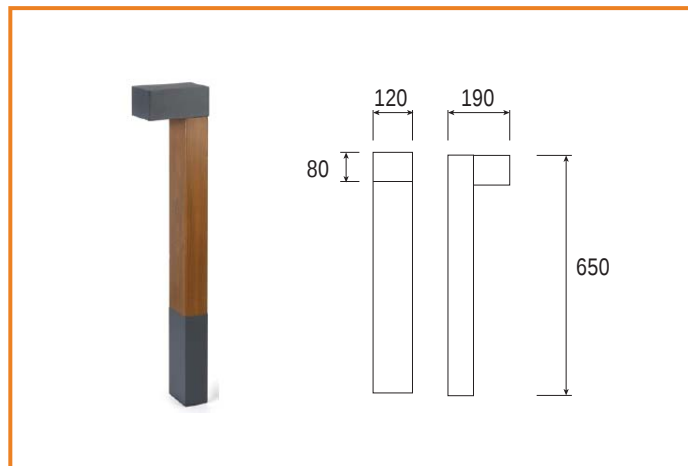**OLE-PC-015RW-P10**


Power	10W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Aluminum and extruded aluminum, real wood
Diffuser	Clear PMMA
Dimension	190*650 mm
Efficiency	130lm/W - 150lm/W

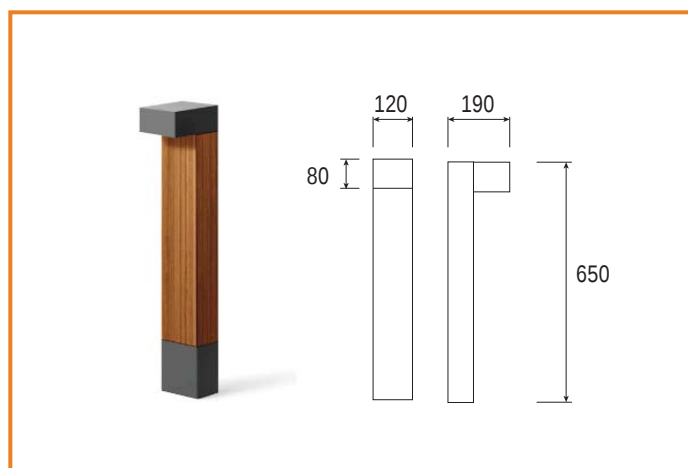**OLE-PC-015W-P10**

Power	10W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	190*650 mm
Efficiency	130lm/W - 150lm/W

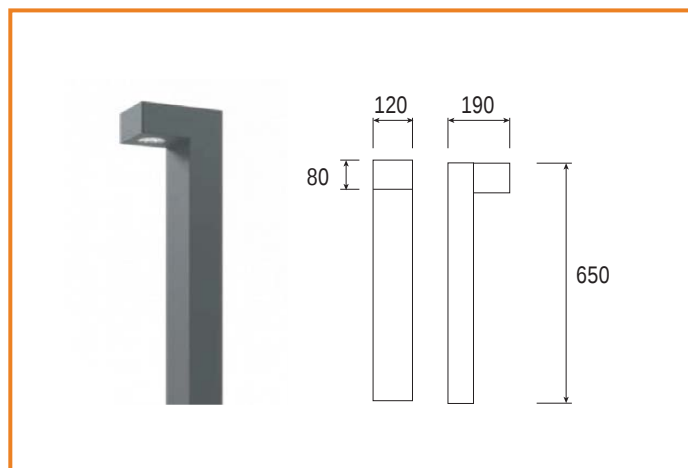**OLE-PC-015S-P10**


Power	10W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	190*650 mm
Efficiency	130lm/W - 150lm/W

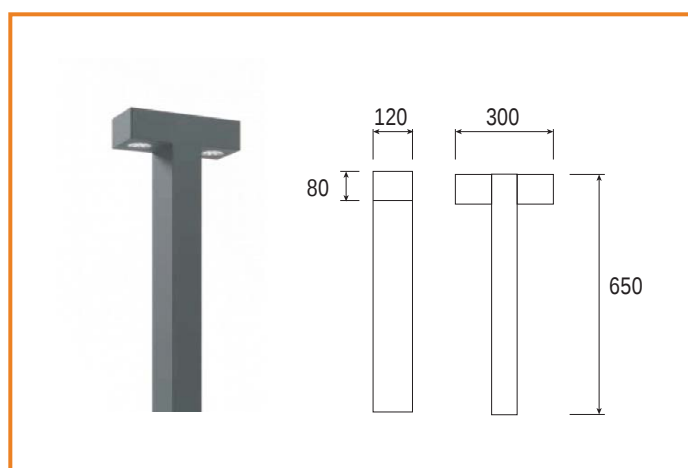**OLE-PC-015SD-P10**


Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	300*650 mm
Efficiency	130lm/W - 150lm/W

**OLE-PE-024-P20**


Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	150*800 mm
Efficiency	130lm/W - 150lm/W

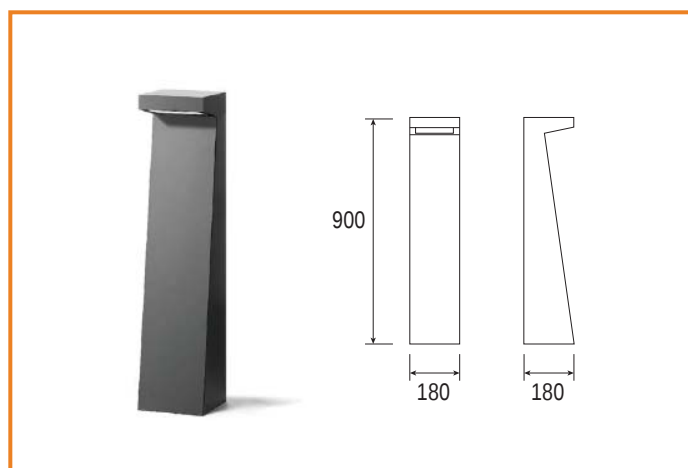**OLE-PM-020-P15**


Power	15W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	180*900 mm
Efficiency	130lm/W - 150lm/W

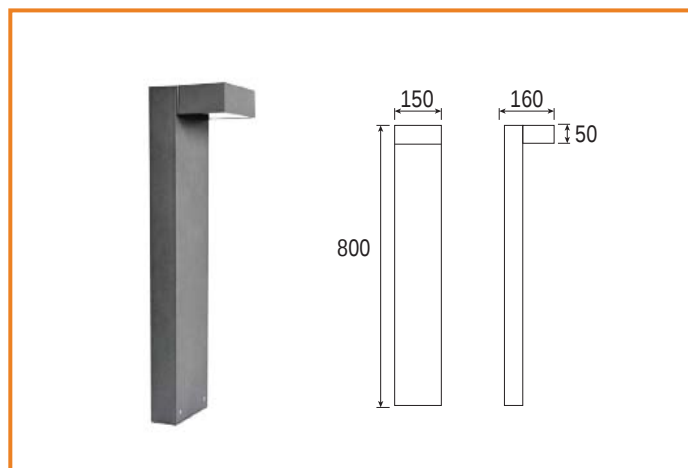**OLE-PC-024C-P20**


Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	160*800 mm
Efficiency	130lm/W - 150lm/W

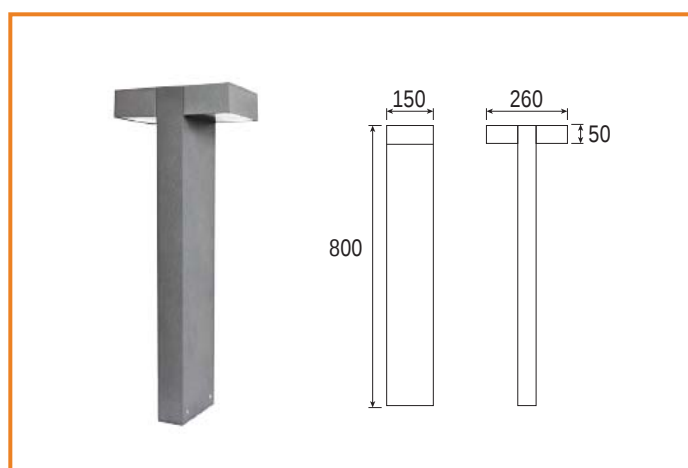**OLE-PC-024CD-P20**


Power	2*20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	260*800 mm
Efficiency	130lm/W - 150lm/W

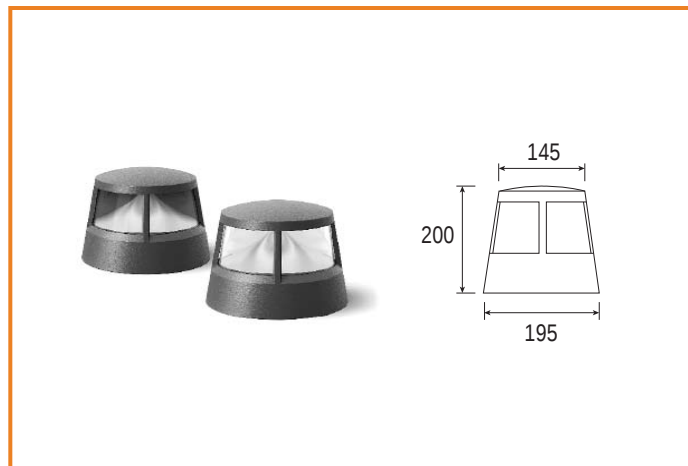**OLE-PR-024A-P20**

Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	195*200 mm
Efficiency	130lm/W - 150lm/W

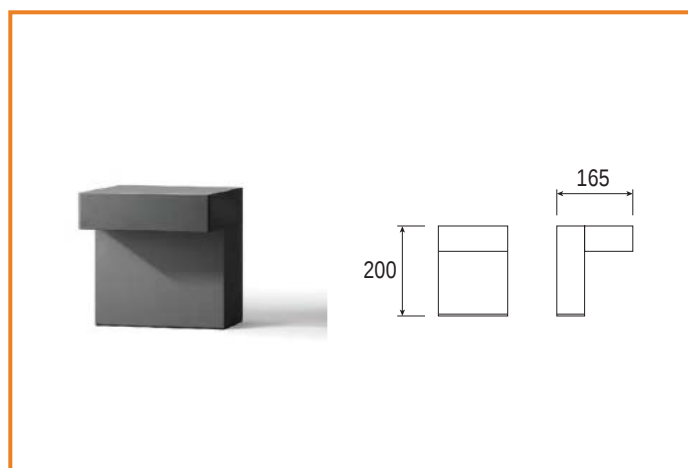**OLE-PY-020-P15**


Power	15W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	165*200 mm
Efficiency	130lm/W - 150lm/W

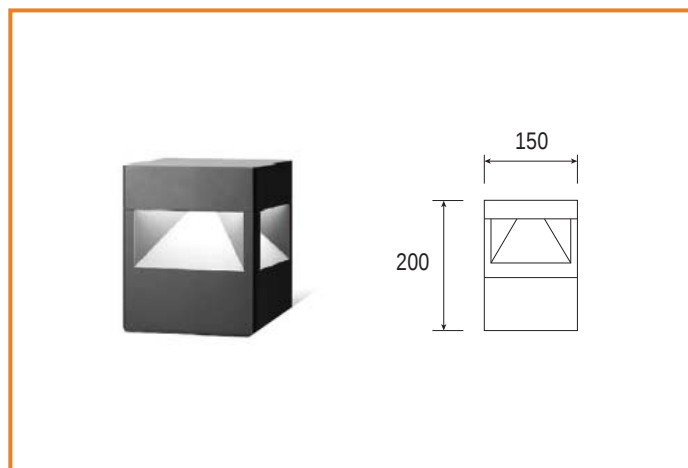**OLE-PE-024S-P20**


Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	150*200 mm
Efficiency	130lm/W - 150lm/W

**OLE-PI-024A-P20**


Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	160*800 mm
Efficiency	130lm/W - 150lm/W

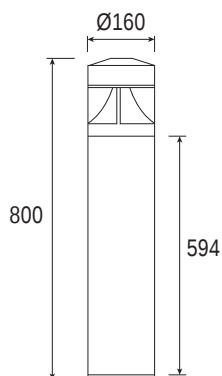**OLE-PI-024B-P20**


Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	160*800 mm
Efficiency	130lm/W - 150lm/W

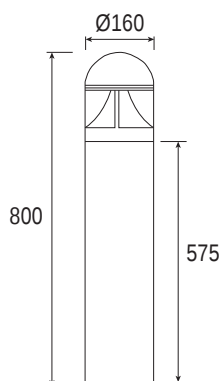**OLE-PI-024C-P20**

Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	160*800 mm
Efficiency	130lm/W - 150lm/W

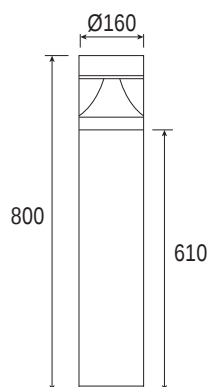**OLE-PT-024A-P20**

Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	160*800 mm
Efficiency	130lm/W - 150lm/W

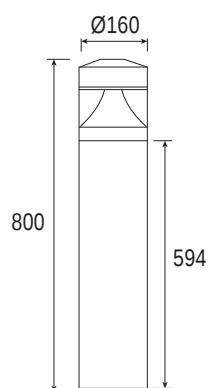**OLE-PT-024B-P20**

Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	160*800 mm
Efficiency	130lm/W - 150lm/W

**OLE-PT-024C-P20**

Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	160*800 mm
Efficiency	130lm/W - 150lm/W

**OLE-PR-024A-P20**

Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	160*800 mm
Efficiency	130lm/W - 150lm/W

**OLE-PR-024B-P20**

Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	160*800mm
Efficiency	130lm/W - 150lm/W


**OLE-PR-024C-P20**

Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	160*800 mm
Efficiency	130lm/W - 150lm/W



OLE-PN-024-P20

Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Material	Die casting aluminum and extruded aluminum
Diffuser	Clear PMMA
Dimension	160*800 mm
Efficiency	130lm/W - 150lm/W

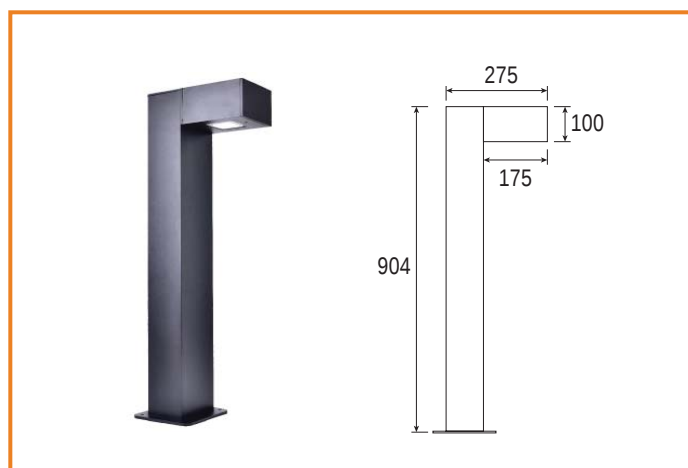

OLE-PC-024-P20

Power	20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Sonsen
IP	IP65
Input	AC100 - 240V
Dimension	275*904 mm
Efficiency	130lm/W - 150lm/W




OLE-PS-010-P07/OLE-PS-015-P10/OLE-PS-018-P12

Power	7W, 10W, 12W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Dimension	140*600 mm
Efficiency	130lm/W - 150lm/W




OLE-PS-015L-P10/OLE-PS-020L-P15/OLE-PS-024L-P20

Power	10W, 15W, 20W
Chip	Lumileds
CCT	2700K - 6000K
Driver	Eaglerise
IP	IP65
Input	AC100 - 240V
Dimension	230*800 mm
Efficiency	130lm/W - 150lm/W

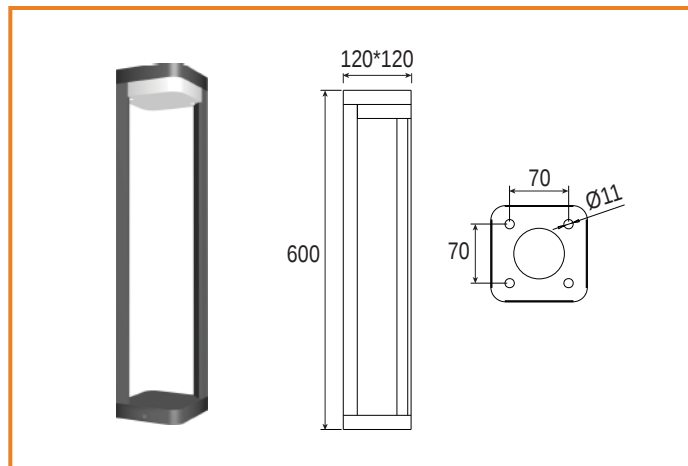

OLE HH3044

Power	10W
Material	Aluminum
CCT	3000K / 4000K / 5700K
CRI	70 / 80 / 90
IP	IP65
Input	220V ~ 50Hz
Dimension	120*120*600 mm

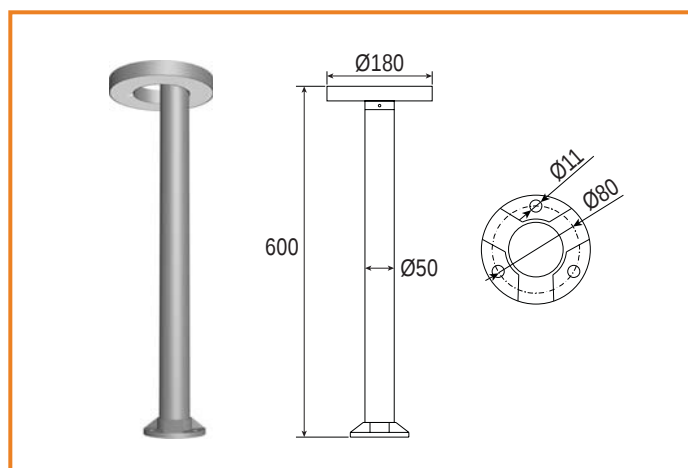

OLE HH3045

Power	10W
Material	Aluminum
CCT	3000K / 4000K / 5700K
CRI	70 / 80 / 90
IP	IP65
Input	220V ~ 50Hz
Dimension	180*600 mm






OLE-JB-SL135

Power	3W
Height	600mm
CCT	3000K / 4000K / 6000K
Material	Aluminum
IP	IP65
Solar Panel	5W Monocrystalline
Battery	5Ah
Working Hours	8-10 Hours



OLE-JB-SL878

Power	1.2W
Height	600mm
CCT	3000K / 4000K / 6000K
Strip Color	Red / Green / Blue / Pink
Material	Aluminum
IP	IP65
Solar Panel	5V / 1.5W (Polysilicon)
Battery	3.7V / 2200mAh
Charging Time	4-6 Hours
Working Hours	12 Hours
Control	Light control + Human body sensing

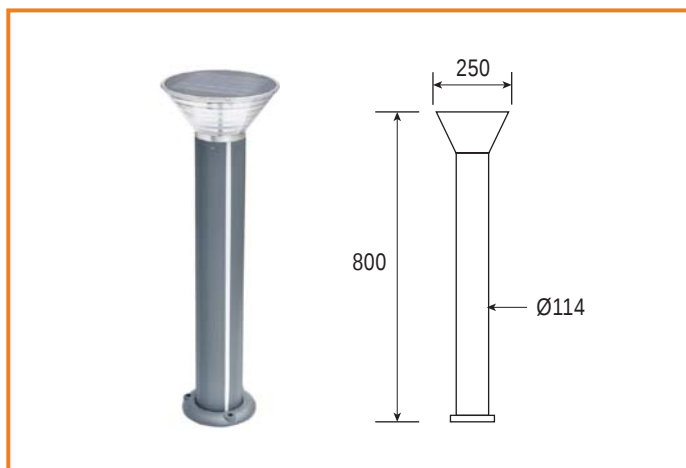

OLE-JB-SL803

Power	2.5W
Height	800mm
CCT	3000K / 4000K / 6000K
Strip Color	Red / Green / Blue / Pink
Material	Aluminum
IP	IP65
Solar Panel	4W Monocrystalline
Battery	4000mAh
Working Hours	8-10 Hours



OLE-JB-SL802

Power	3W
Height	800mm
CCT	3000K / 4000K / 6000K
Strip Color	Red / Green / Blue / Pink
Material	Aluminum
IP	IP65
Solar Panel	6W Monocrystalline
Battery	4000mAh
Working Hours	8-10 Hours




OLE-JB-SL822

Power	3W
Height	800mm
CCT	3000K / 4000K / 6000K
Material	Aluminum
IP	IP65
Solar Panel	6W Monocrystalline
Battery	4000mAh
Working Hours	8-10 Hours




OLE-JB-SL881

Power	1.2W
Height	600mm
CCT	3000K / 4000K / 6000K
Material	Aluminum
IP	IP65
Solar Panel	1.5W Monocrystalline
Battery	3600mAh
Working Hours	8 Hours

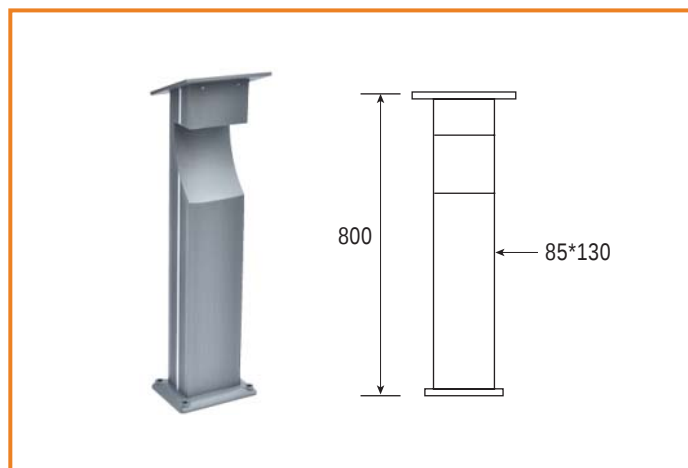

OLE-JB-SL809

Power	3W
Height	800mm
CCT	3000K / 4000K / 6000K
Strip Color	Red / Green / Blue / Pink
Material	Aluminum
IP	IP65
Solar Panel	6W Monocrystalline
Battery	4000mAh
Working Hours	8-10 Hours

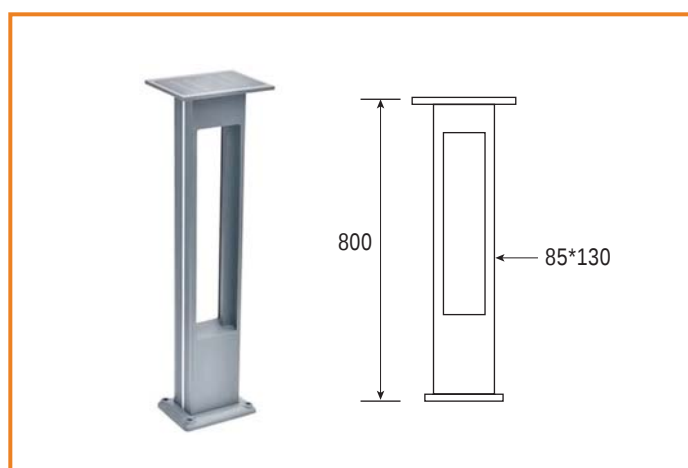

OLE-JB-SL829C

Power	3W
Height	800mm
CCT	3000K / 4000K / 6000K
Strip Color	Red / Green / Blue / Pink
Material	Aluminum
IP	IP65
Solar Panel	6W Monocrystalline
Battery	4000mAh
Working Hours	8-10 Hours




OLE-JB-SL888

Power	2W
Height	600mm
CCT	3000K / 4000K / 6000K
Material	Aluminum+PC
IP	IP65
Solar Panel	2W Monocrystalline
Battery	2200mAh
Working Hours	8-10 Hours




OLE-JB-SL890

Power	1.2W
Height	800mm
CCT	3000K / 4000K / 6000K
Strip Color	Red / Green / Blue / Pink
Material	Aluminum
IP	IP65
Solar Panel	1.5W Monocrystalline
Battery	2.2Ah
Working Hours	6-8 Hours

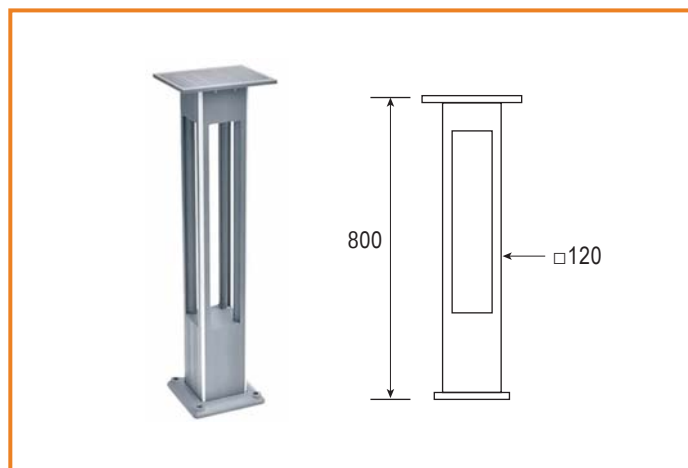


OLE-JB-SL830G

Power	3W
Height	800mm
CCT	3000K / 4000K / 6000K
Strip Color	Red / Green / Blue / Pink
Material	Aluminum
IP	IP65
Solar Panel	6W Monocrystalline
Battery	4000mAh
Working Hours	8-10 Hours

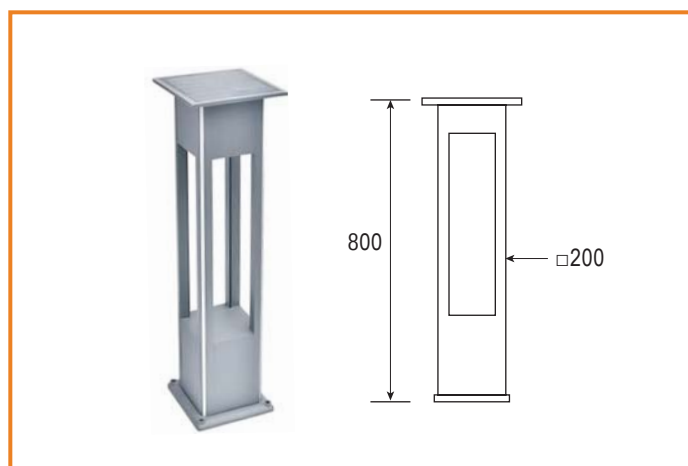

OLE-JB-SL831J

Power	5W
Height	800mm
CCT	4000K
Strip Color	Red / Green / Blue / Pink
Material	Aluminum
IP	IP65
Solar Panel	8W Monocrystalline
Battery	10Ah
Working Hours	8-10 Hours

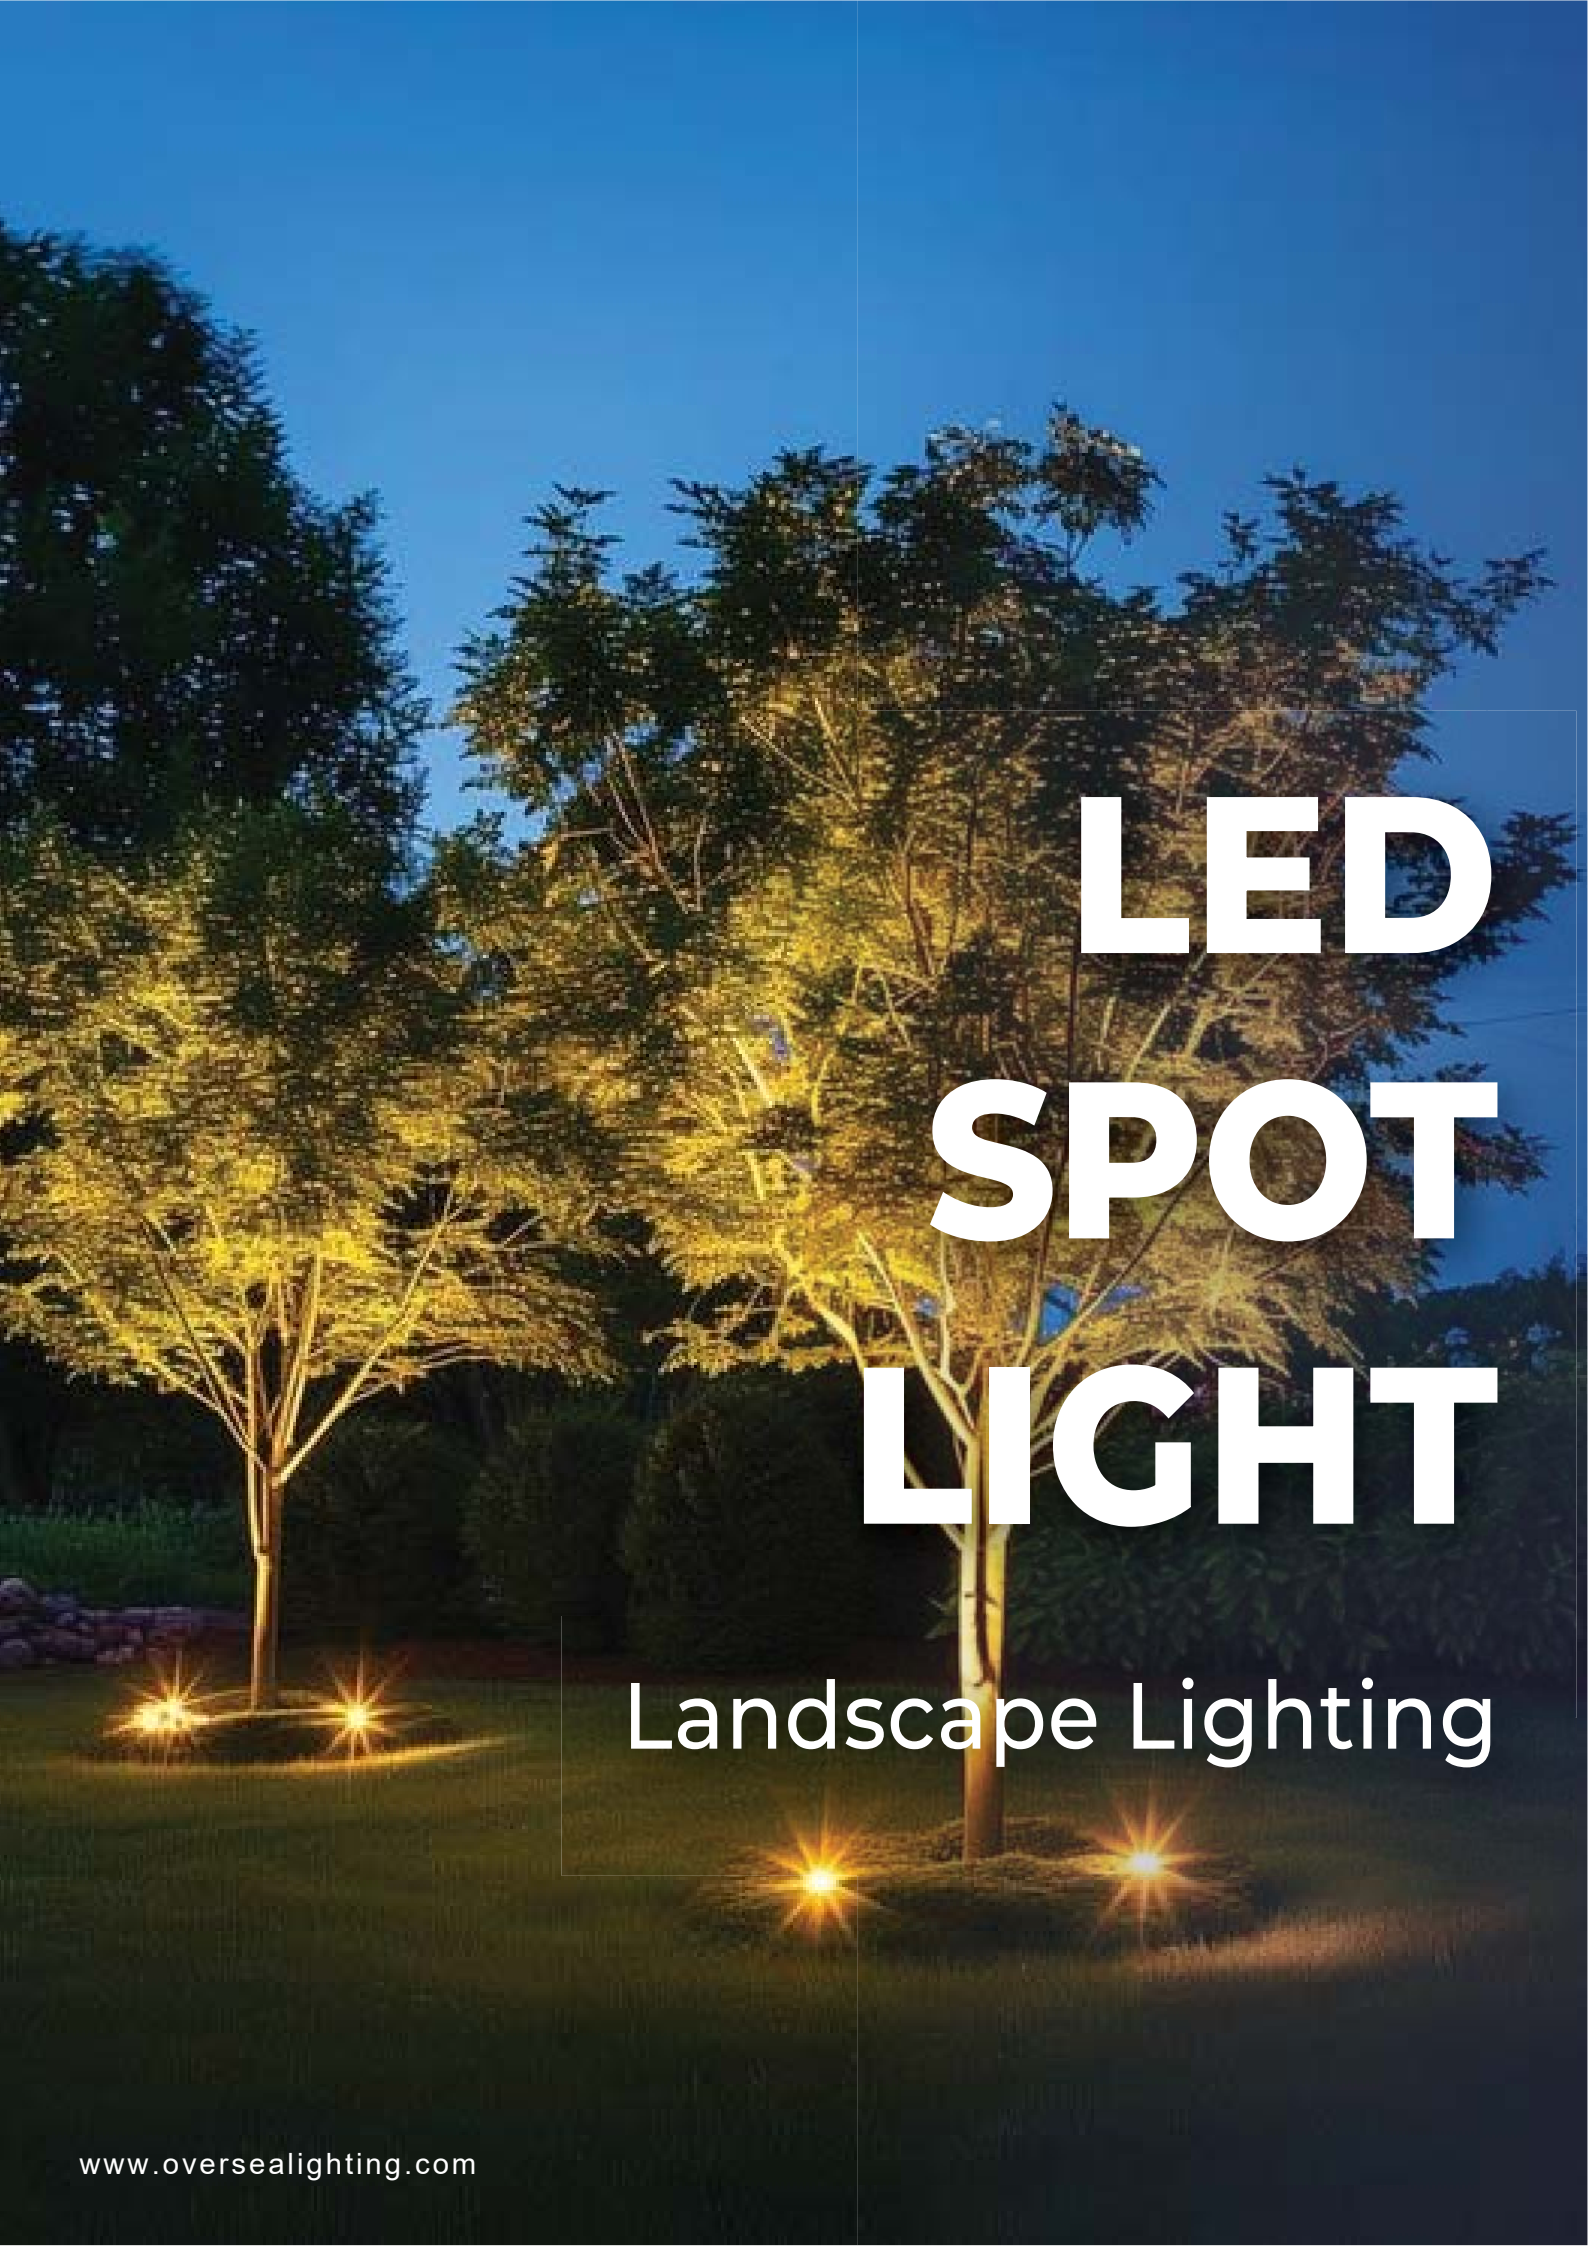


LED SPOT LIGHT

Landscape Lighting



OLE-T541301

Power	6W, 8W, 9W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	3
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

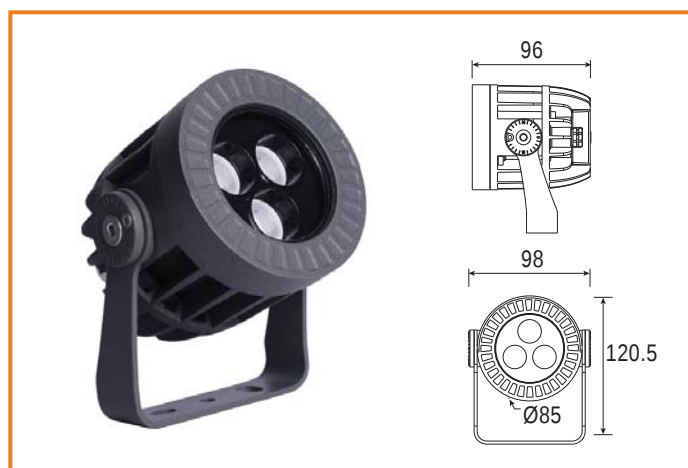

OLE-T541302

Power	9W, 12W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	3
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit



OLE-T541303

Power	12W, 15W, 18W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	6
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit



OLE-T541304

Power	20W, 21W, 24W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	9
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541305**

Power	36W, 48W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	18
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541307**

Power	72W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	36
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541101**

Power	9W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	4
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541102**

Power	12W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	5
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541103**

Power	18W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	9
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541104**

Power	24W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	12
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541105**

Power	36W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	16
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541106**


Power	48W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	24
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit



OLE-T541107

Power	72W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	36
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit



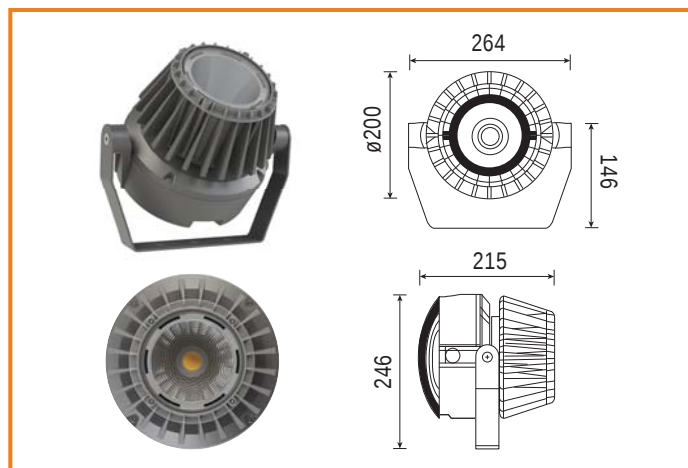

OLE L-PRO 7228

Power	38W	55W
Input Current	0.16A	0.23A
Lumen	3800 lm	5500 lm
CCT	2200K-3500K / 3500K-4500K / 4500K-5500K	
Beam Angle	15°, 23°, 46°	
Protection	IP65	
Input Voltage	AC240V	
Material	Die-Cast Aluminum Housing ADC12	
Reflector	High Polished PC, Built-In Constant Current Driver	
Weight	4.5 kg	
Carton Size	280*213*232mm (1pc per carton - 4.9kg/carton)	




OLE L-PRO 7248

Power	55W
Input Current	0.23A
Lumen	5500 lm
CCT	2200K-3500K / 3500K-4500K / 4500K-5500K
Beam Angle	15°, 23°, 46°
Protection	IP65
Input Voltage	AC240V
Material	Die-Cast Aluminum Housing ADC12
Reflector	High Polished PC, Built-In Constant Current Driver
Weight	5 kg
Carton Size	225*225*380mm (1pc per carton - 5.5kg/carton)




OLE Spot Midi

Power	12W	26W
Input Current	0.05A	0.11A
Lumen	1200 lm	2600 lm
CCT	2200K-3500K / 3500K-4500K / 4500K-5500K	
Beam Angle	46°	
Protection	IP65	
Input Voltage	AC240V	
Material	Die-Cast Aluminum Housing ADC12	
Reflector	High Polished PC, External Driver	
Weight	1.4 kg	
Carton Size	195*195*120mm (1pc per carton - 1.5kg/carton)	

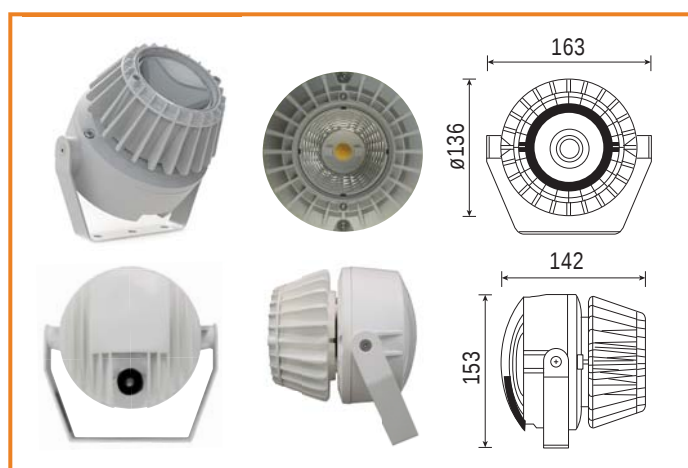


OLE L-PRO 7217

Power	12W	26W
Input Current	0.05A	0.11A
Lumen	1200 lm	2600 lm
CCT	2200K-3500K / 3500K-4500K / 4500K-5500K	
Beam Angle	18°, 30°, 55°, 73°	
Protection	IP65	
Input Voltage	AC240V	
Material	Die-Cast Aluminum Housing ADC12	
Reflector	High Polished PC, Built-In Constant Current Driver	
Weight	2.4 kg	
Carton Size	160*170*180mm (1pc per carton - 2.4kg/carton)	

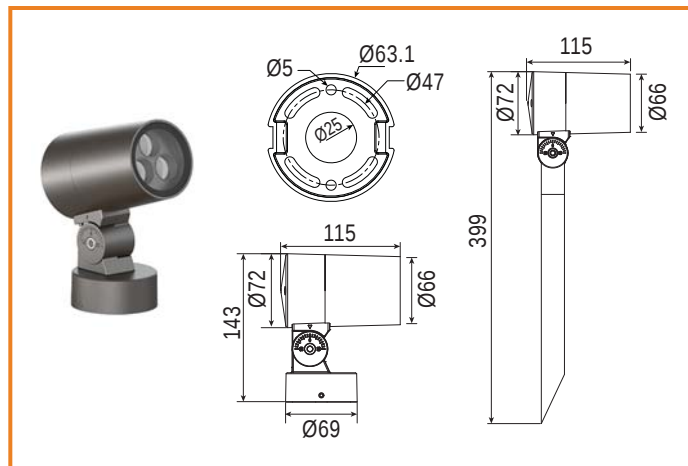


OLE-T541331

Power	9W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	3
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

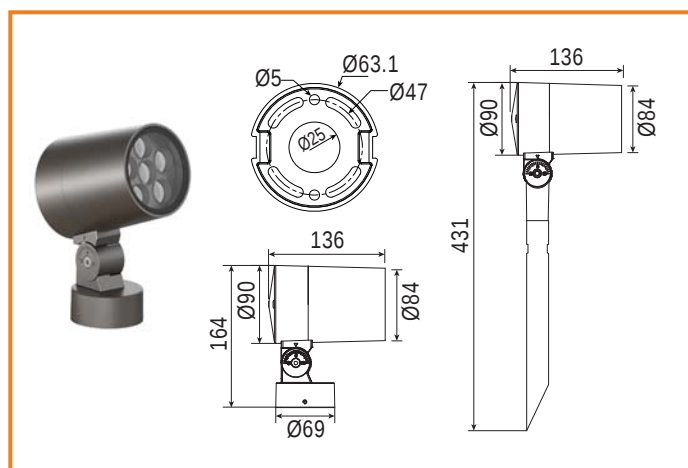


OLE-T541332

Power	18W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	6
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

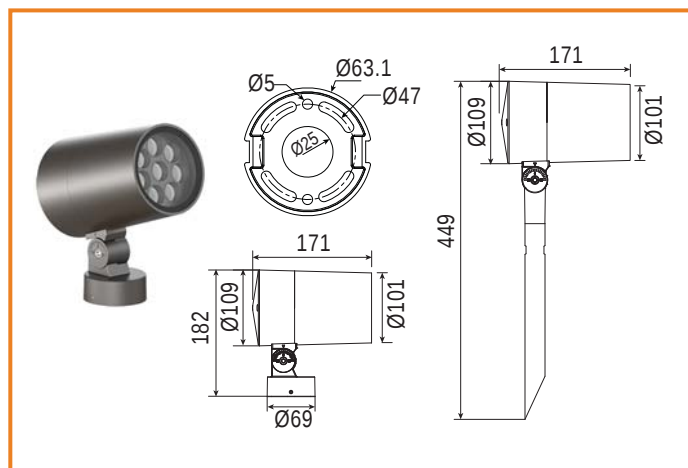


OLE-T541233

Power	24W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	15°, 20°, 30°, 40°, 60°
Led Quantity	9
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

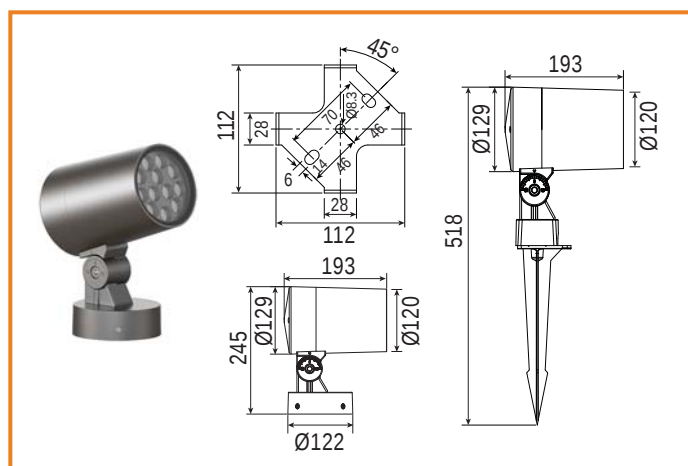


OLE-T541334

Power	36W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	15°, 20°, 30°, 40°, 60°
Led Quantity	12
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

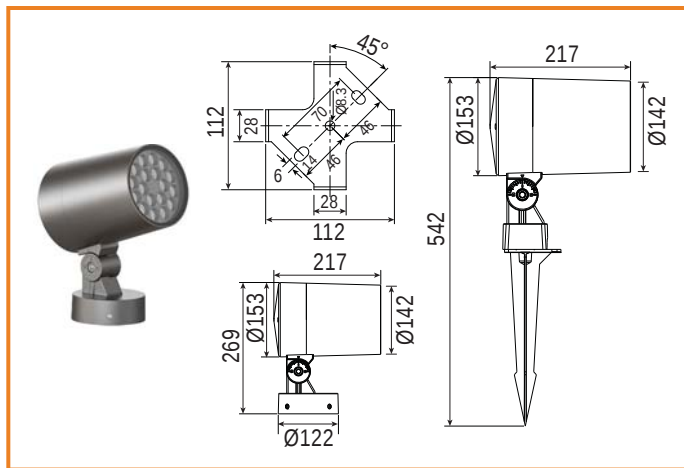


OLE-T541335

Power	48W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	18
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

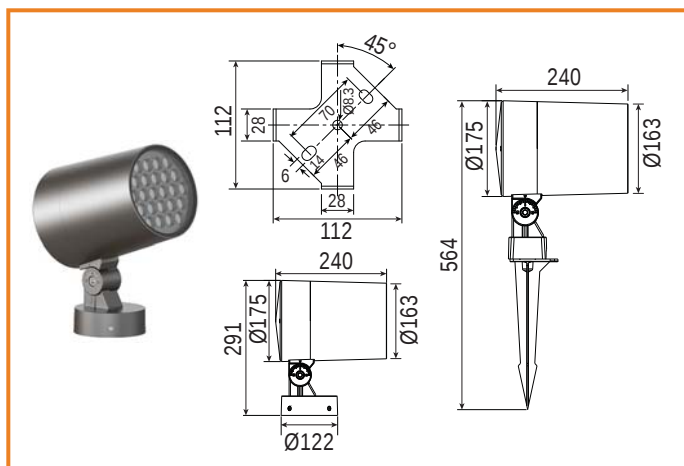

OLE-T541336

Power	60W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	24
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

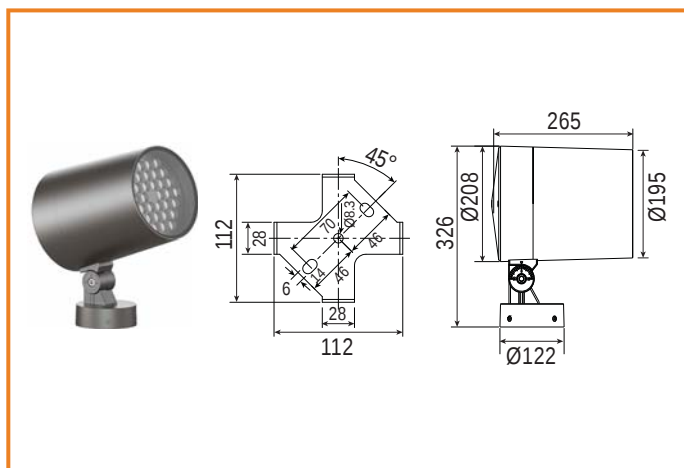

OLE-T541337

Power	80W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	15°, 20°, 30°, 40°, 60°
Led Quantity	36
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

Available Installation for T54133X Series



Spike



Wall Mount



Pole Mount



Pole Hoop




Stand Pole




LED INGROUND LIGHT


Landscape Lighting

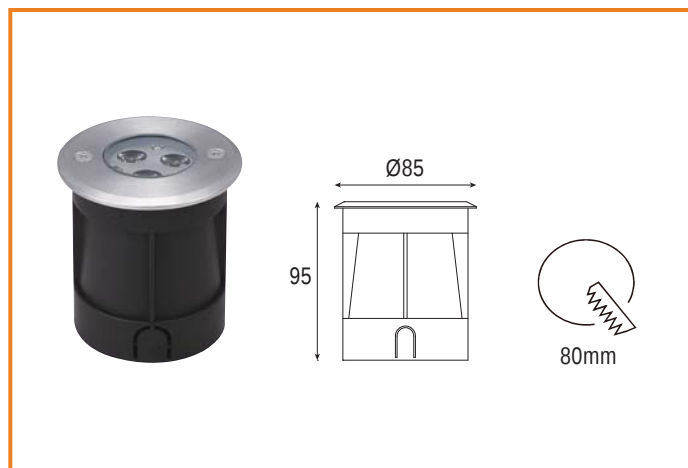**OLE-D871301**

Power	3W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	3
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve

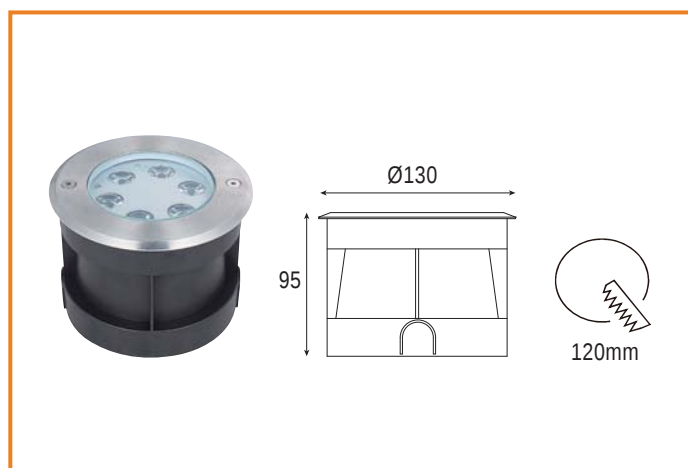**OLE-D871303**


Power	6W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	6
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve

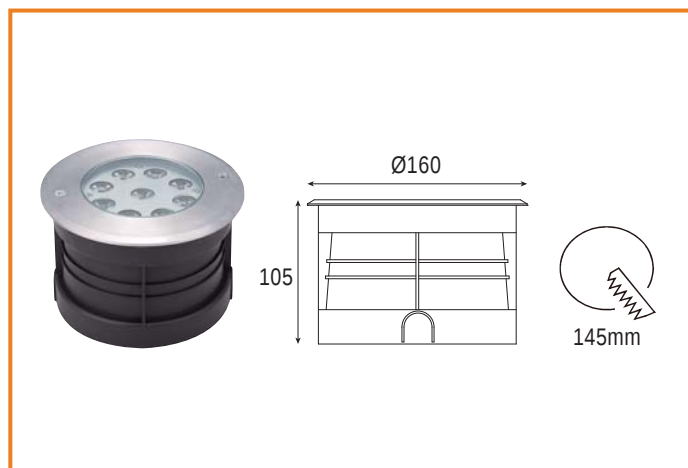**OLE-D871304**


Power	9W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	9
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve

**OLE-D871305**


Power	12W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	12
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve

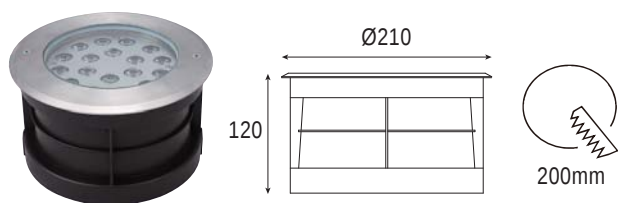**OLE-D871306**


Power	18W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	18
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve

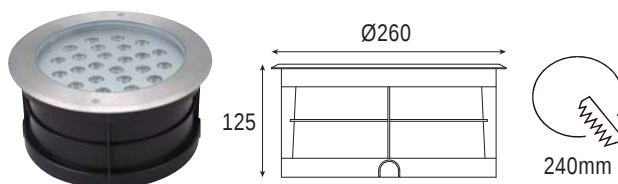**OLE-D871308**

Power	24W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	24
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve

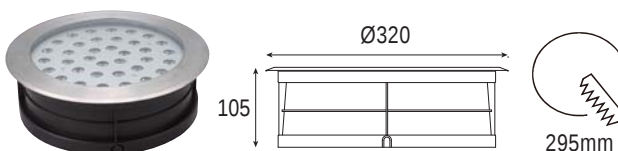**OLE-D871309**

Power	36W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	36
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve

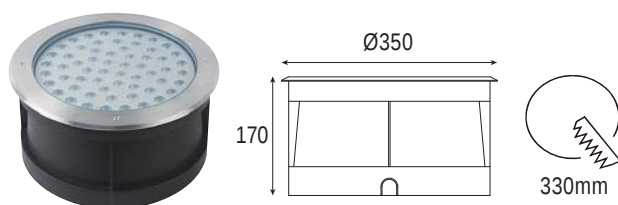**OLE-D871310**

Power	60W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	60
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP67
Material	Die-cast aluminum ADC12
Accessories	ABS mounting sleeve

A tall, multi-story building is shown at night, illuminated by vertical LED linear lights. The lights are arranged in a grid pattern, with blue lights on the upper half and red lights on the lower half. The building's facade is visible, showing windows and balconies. The overall effect is a modern, high-tech architectural lighting display.

LED LINEAR LIGHT

Facade Lighting




Linear light OLE RLL-24P



CCT	2700K-5700K	RGB	RGBW
Power	15W	15W	15W
Beam Angle	120°	120°	120°
Protection	IP66	IP66	IP66
Voltage	DC24/48V	DC24/48V	DC24/48V
Weight	0.6KG	0.6KG	0.6KG
Efficacy	27-32 lm/W	16-17 lm/W	19-20 lm/W
Color	Graphite Black, Iron Grey, Signal White, Signal Green		

Dimension

Flat Bracket

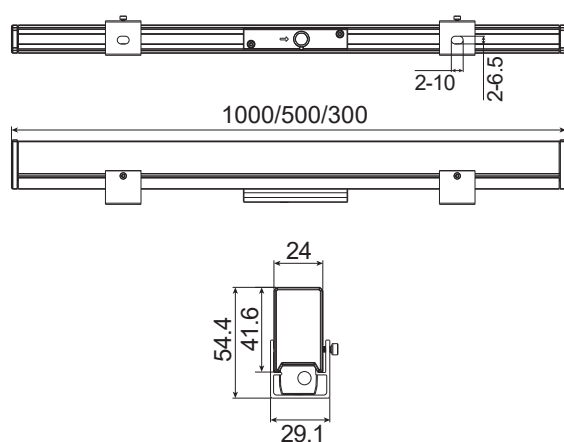


Clip Bracket

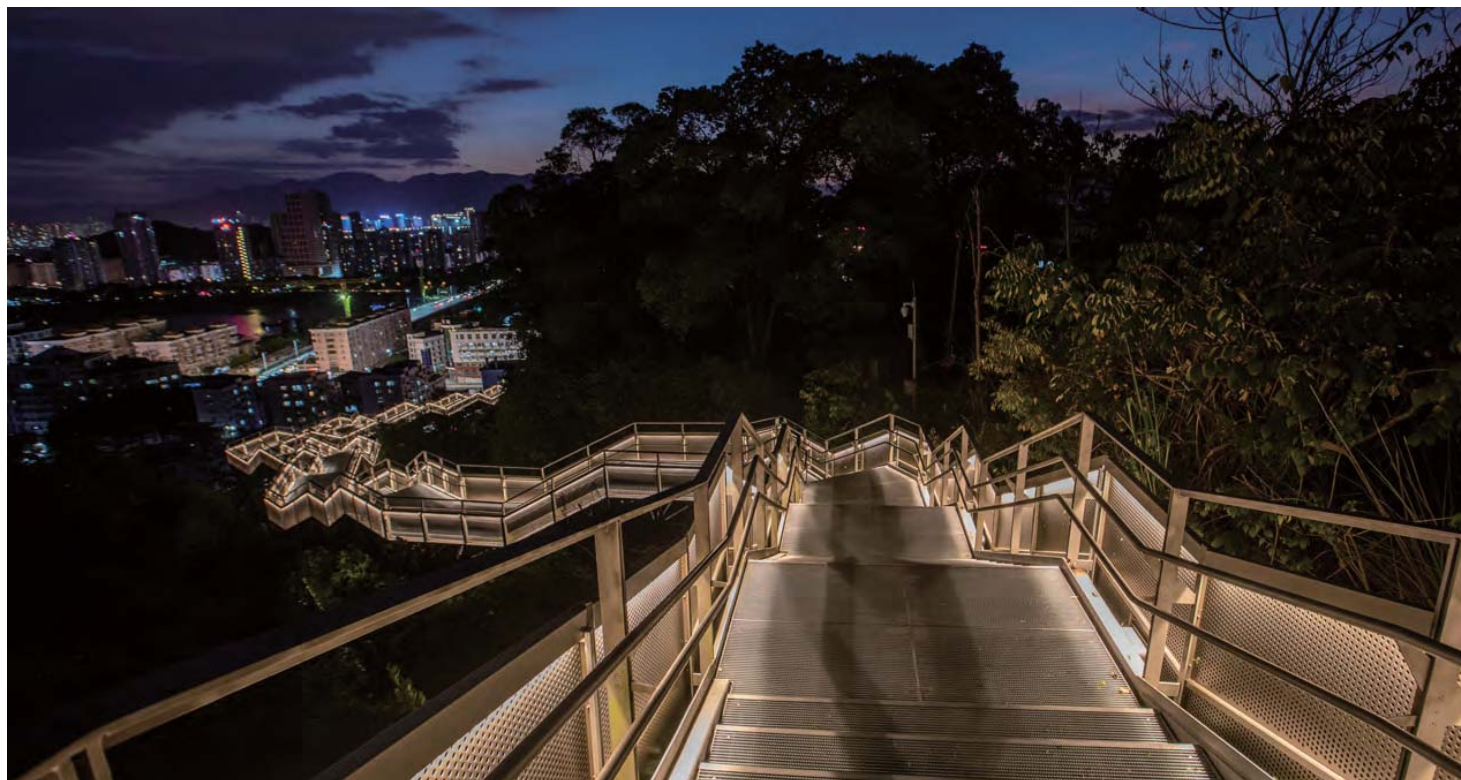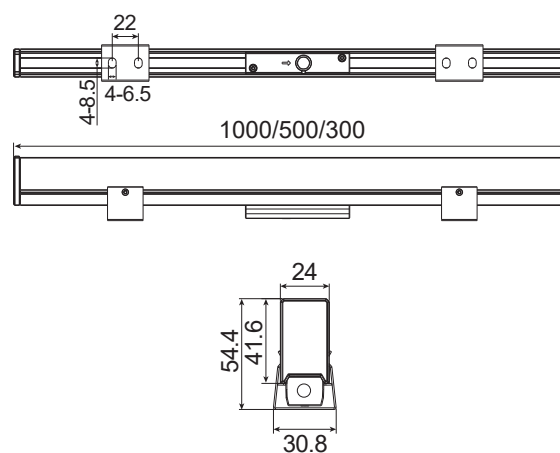




Dimension


Flat Bracket

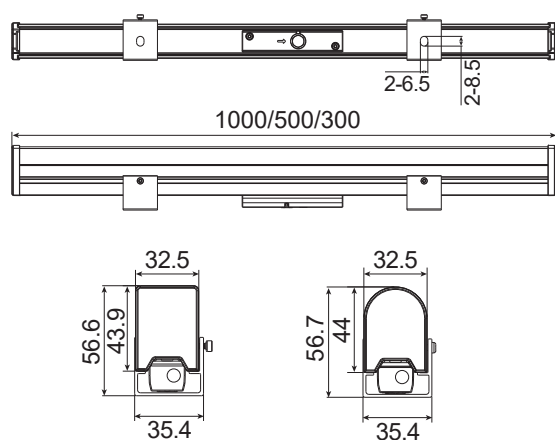

Clip Bracket

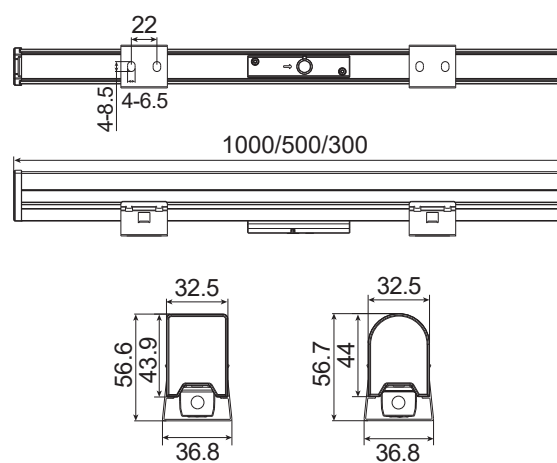


Rotate Bracket

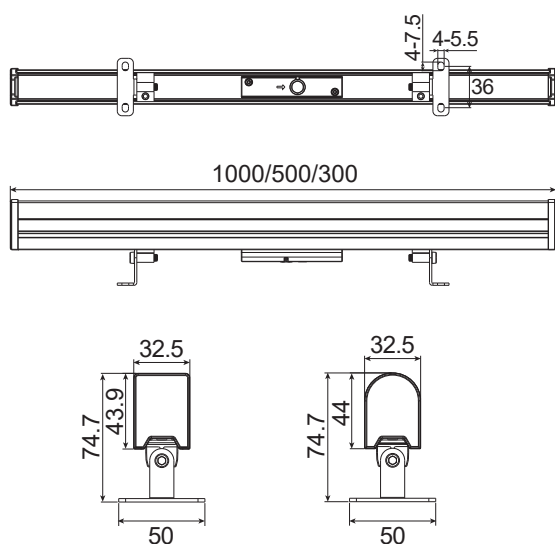

Linear light OLE RCL-30P

CCT	2700K-5700K	RGB	RGBW
Power	15W		15W
Beam Angle	150°		150°
Protection	IP66		IP66
Voltage	DC24/48V		DC24/48V
Weight	0.7KG		0.7KG
Efficacy	33-40 lm/W		16-17 lm/W
			19-20 lm/W
Color	Graphite Black, Iron Grey, Signal White, Signal Green		




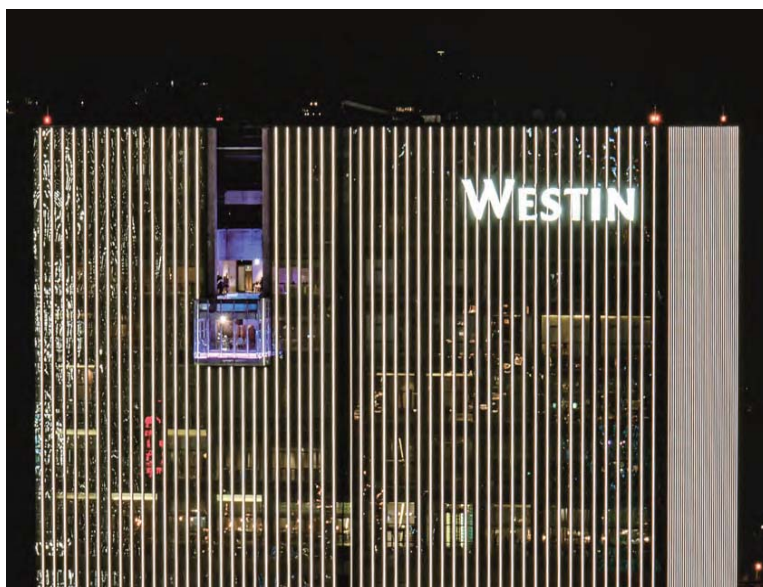




Linear light OLE RCL-22P

CCT	2700K-5700K	RGB	RGBW
Power	12W	12W	12W
Control	DMX512	DMX512	DMX512
Beam Angle	120°	120°	120°
Protection	IP65	IP65	IP65
Voltage	DC24/48V	DC24/48V	DC24/48V
Weight	0.82KG	0.82KG	0.82KG
Efficacy	26-32 lm/W	7-8 lm/W	10-15 lm/W
Color	Graphite Black, Iron Grey, Signal White, Signal Green		

Dimension

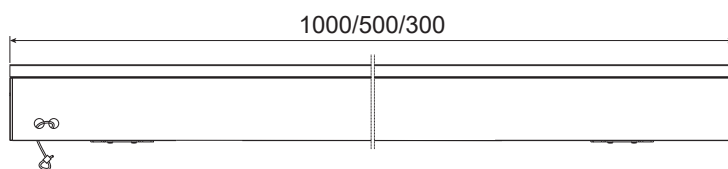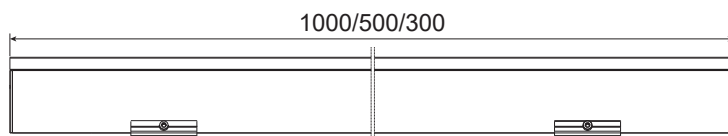



LED WALL WASHER


Facade Lighting



Wall washer OLE RWW-24

CCT	2700K-5700K	RGB	RGBW
Power	12W	12W	14W
Control	DMX512	DMX512	DMX512
Beam Angle	30°, 45°, 25°*45°		
Protection	IP66	IP66	IP66
Voltage	DC24V	DC24V	DC24V
Weight	0.8KG	0.8KG	0.8KG
Efficacy	45-52 lm/W	19-20 lm/W	23-24 lm/W
Housing	Aluminum	Aluminum	Aluminum
Color	Graphite Black, Iron Grey, Signal White, Signal Green		


Dimension

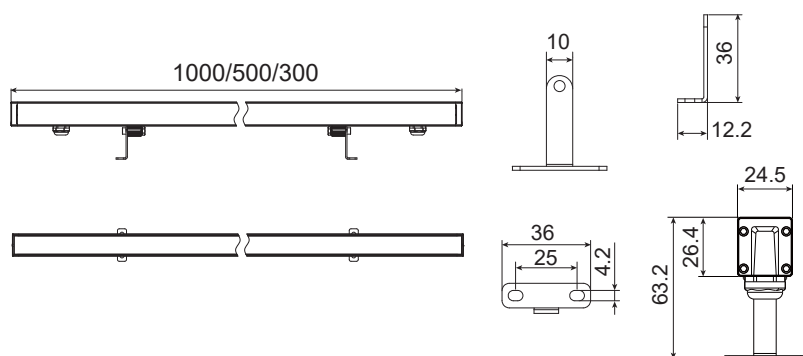

Wall washer OLE RWW-33


CCT	2700K-5700K	2700K-5700K
Power	18W	24W
Beam Angle	20°, 30°, 45°, 20°*40°	
Protection	IP66	IP66
Voltage	DC24V	DC24V
Weight	1.2KG	1.2KG
Efficacy	90-110 lm/W	90-110 lm/W
Housing	Aluminum	Aluminum
Color	Graphite Black, Iron Grey, Signal White, Signal Green	

Dimension

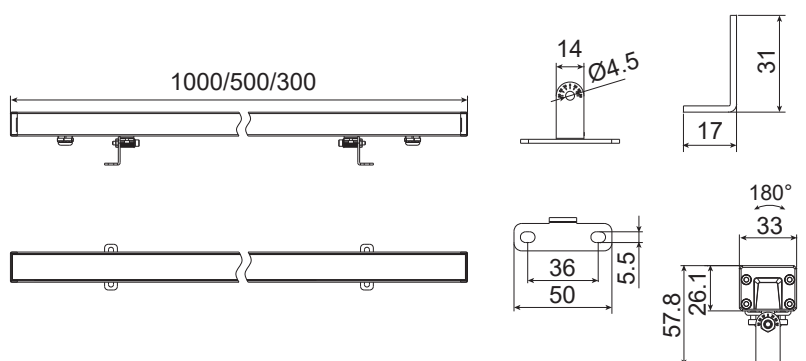




Dimension

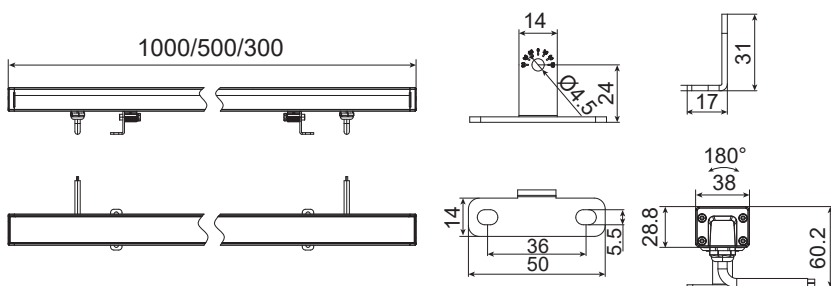


Wall washer OLE RWW-38

CCT	2700K-5700K	RGB	RGBW
Power	24W,36W,48W	36W	48W
Control	DMX512	DMX512	DMX512
Beam Angle	8°,15°,30°,45°,60°,15°*60°,20°*40°	15°,30°,45°,15°*60°,20°*40°	15°,30°,45°,15°*60°,20°*40°
Protection	IP66	IP66	IP66
Voltage	DC24V	DC24V	DC24V
Weight	1.5KG	1.5KG	1.5KG
Efficacy	62-83 lm/W	19-25 lm/W	27-38 lm/W
Housing	Aluminum	Aluminum	Aluminum
Color	Graphite Black, Iron Grey, Signal White, Signal Green		

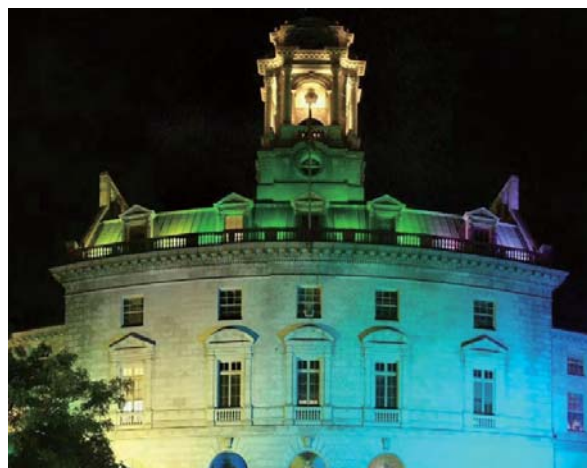

Dimension

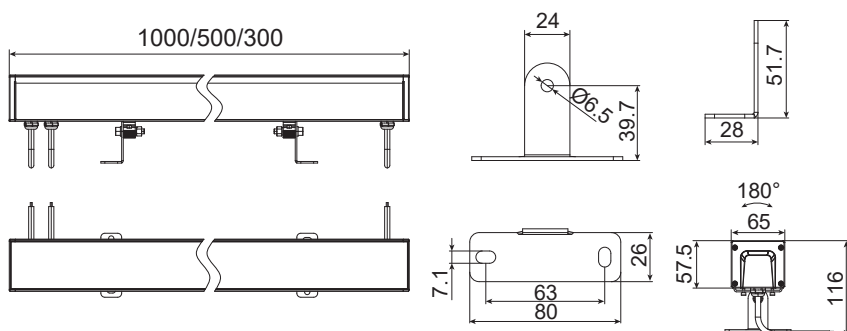

Wall washer OLE RWW-65


CCT	2700K-5700K	RGB	RGBW	5in1	7in1
Power	60W	60W	60W	48W	60W
Control	DMX512	DMX512	DMX512	DMX512	DMX512
Beam Angle	8°,15°,22°,30°,45°,60°,15°*60°,20°*40°	15°,30°,45°,60°,15°*60°,20°*40°	15°,22°,45°		
Protection	IP66	IP66	IP66	IP66	
Voltage	AC200V-240V	AC200V-240V	AC200V-240V	AC200V-240V	
Weight	3.5KG	3.5KG	3.5KG	3.5KG	
Efficacy	56-75 lm/W	22-26 lm/W	33-38 lm/W	50-63 lm/W	
Housing	Aluminum	Aluminum	Aluminum	Aluminum	
Color	Graphite Black, Iron Grey, Signal White, Signal Green				






Dimension

L Shape Bracket

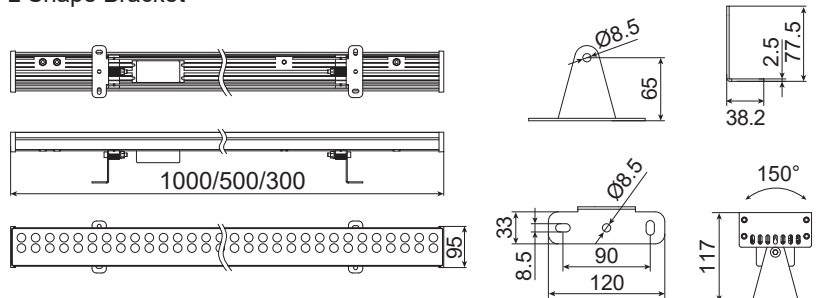

Baffle Type

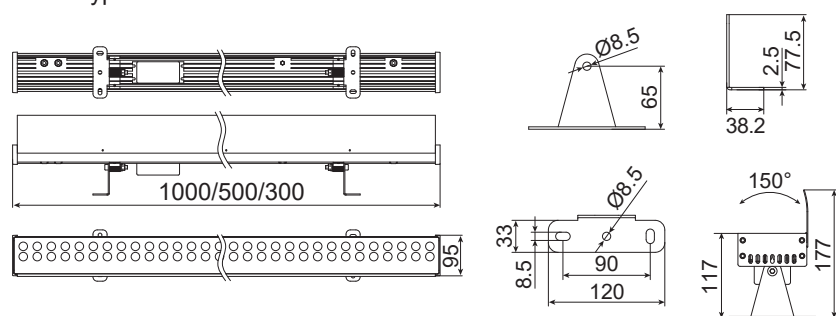

Wall washer OLE RWW-90

CCT	2700K-6000K	RGB	RGBW
Power	120W		120W
Control	DMX512		DMX512
Beam Angle	8°,15°,30°,45°,60°,15°*60°,20°*40°		15°,30°,45°,60°,15°*60°,20°*40°
Protection	IP66		IP66
Voltage	DC24V / AC110V-220V / AC220V		
Weight	4.9KG		4.9KG
Efficacy	65-75 lm/W		36-41 lm/W
Housing	Aluminum		Aluminum
Color	Graphite Black, Iron Grey, Signal White, Signal Green		






LED PIXEL LIGHT

Facade Lighting



Dimension

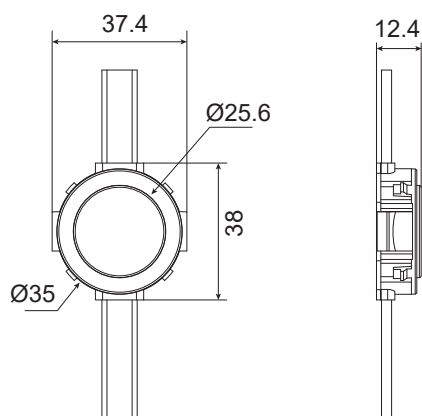


Pixel light OLE RDO-35

CCT	2700K-6500K	RGB	RGBW
Power	0.7W, 1.4W	0.7W, 1.4W	0.9W, 1.8W
Control	DMX512	DMX512	DMX512
Beam Angle	120°	120°	120°
Protection	IP67	IP67	IP67
Voltage	DC12/24V	DC12/24V	DC12/24V
Weight	30G	30G	30G
Efficacy	70 lm/W	15 lm/W	40 lm/W
IK Rating	IK10	IK10	IK10
Cover	Optional for transparent / milky / frosted cover		




Dimension

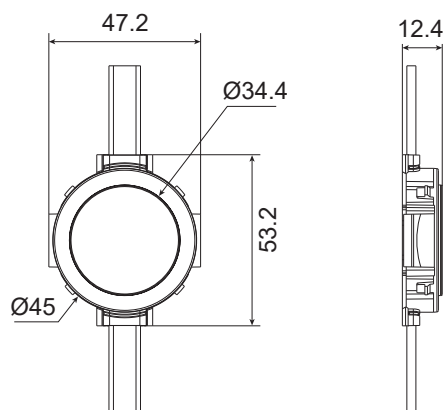


Pixel light OLE RDO-45

CCT	2700K-6500K	RGB	RGBW
Power	1.4W, 1.8W, 2.4W	1.4W, 1.8W, 2.4W	1.8W, 3W
Control	DMX512	DMX512	DMX512
Beam Angle	120°	120°	120°
Protection	IP67	IP67	IP67
Voltage	DC12/24V	DC12/24V	DC12/24V
Weight	40G	40G	40G
Efficacy	70 lm/W	15 lm/W	40 lm/W
IK Rating	IK10	IK10	IK10
Cover	Optional for transparent / milky / frosted cover		

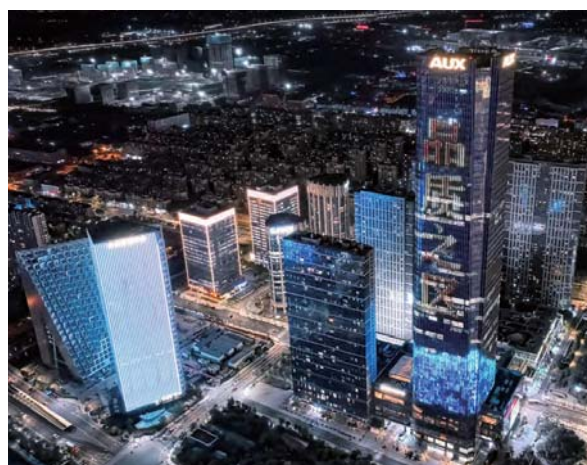



Dimension

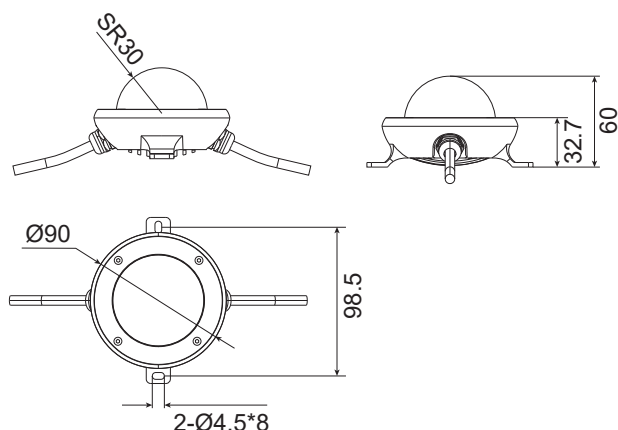


Pixel light OLE RDO-90

CCT	2700K-5700K	RGB	RGBW
Power	3W, 6W	3W, 6W	3W, 6W
Control	DMX512	DMX512	DMX512
Beam Angle	90°, 120°, 150°	90°, 120°, 150°	90°, 120°, 150°
Protection	IP66	IP66	IP66
Voltage	DC24V	DC24V	DC24V
Weight	200G	200G	200G
Efficacy	80, 58 lm/W	15, 10 lm/W	31, 20 lm/W
Cover	Optional for transparent / milky / diamond / frosted cover		




Dimension

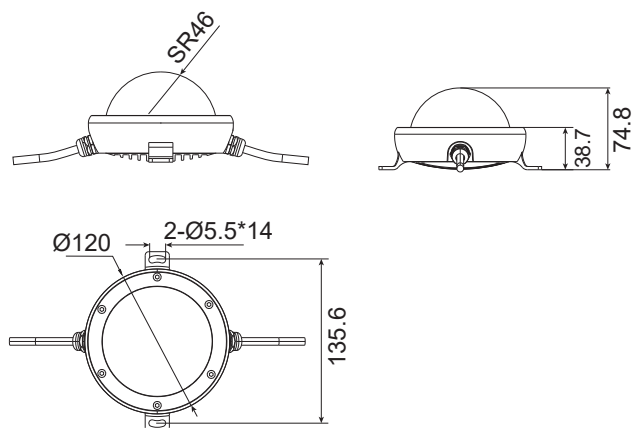


Pixel light OLE RDO-120

CCT	2700K-6500K	RGB	RGBW
Power	7W, 10W	7W, 10W	7W, 10W
Control	DMX512	DMX512	DMX512
Beam Angle	120°, 150°	120°, 150°	120°, 150°
Protection	IP66	IP66	IP66
Voltage	DC24V	DC24V	DC24V
Weight	500G	500G	500G
Efficacy	80 lm/W	20, 15 lm/W	40, 27 lm/W
Cover	Optional for transparent / milky / diamond / frosted cover		

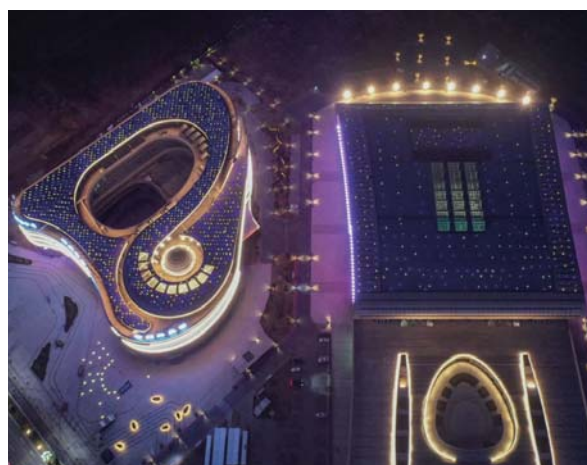




Dimension

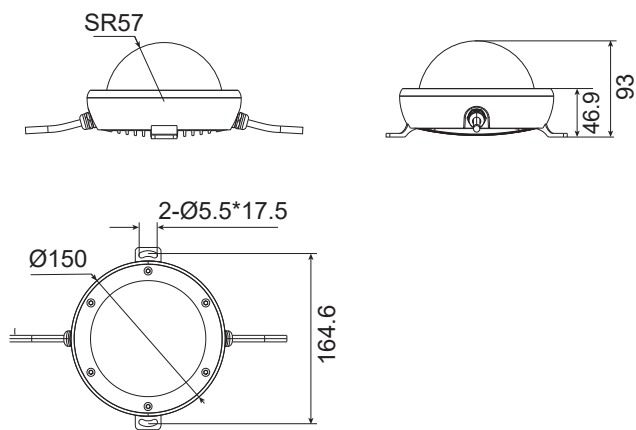

Pixel light OLE RDO-150

CCT	2700K-5700K	RGB	RGBW
Power	12W, 15W	10W, 12W	10W, 12W
Control	DMX512	DMX512	DMX512
Beam Angle	120°, 150°	120°, 150°	120°, 150°
Protection	IP66	IP66	IP66
Voltage	DC24V	DC24V	DC24V
Weight	500G	500G	500G
Efficacy	70, 80 lm/W	15 lm/W	40 lm/W
Cover	Optional for transparent / milky / diamond / frosted cover		



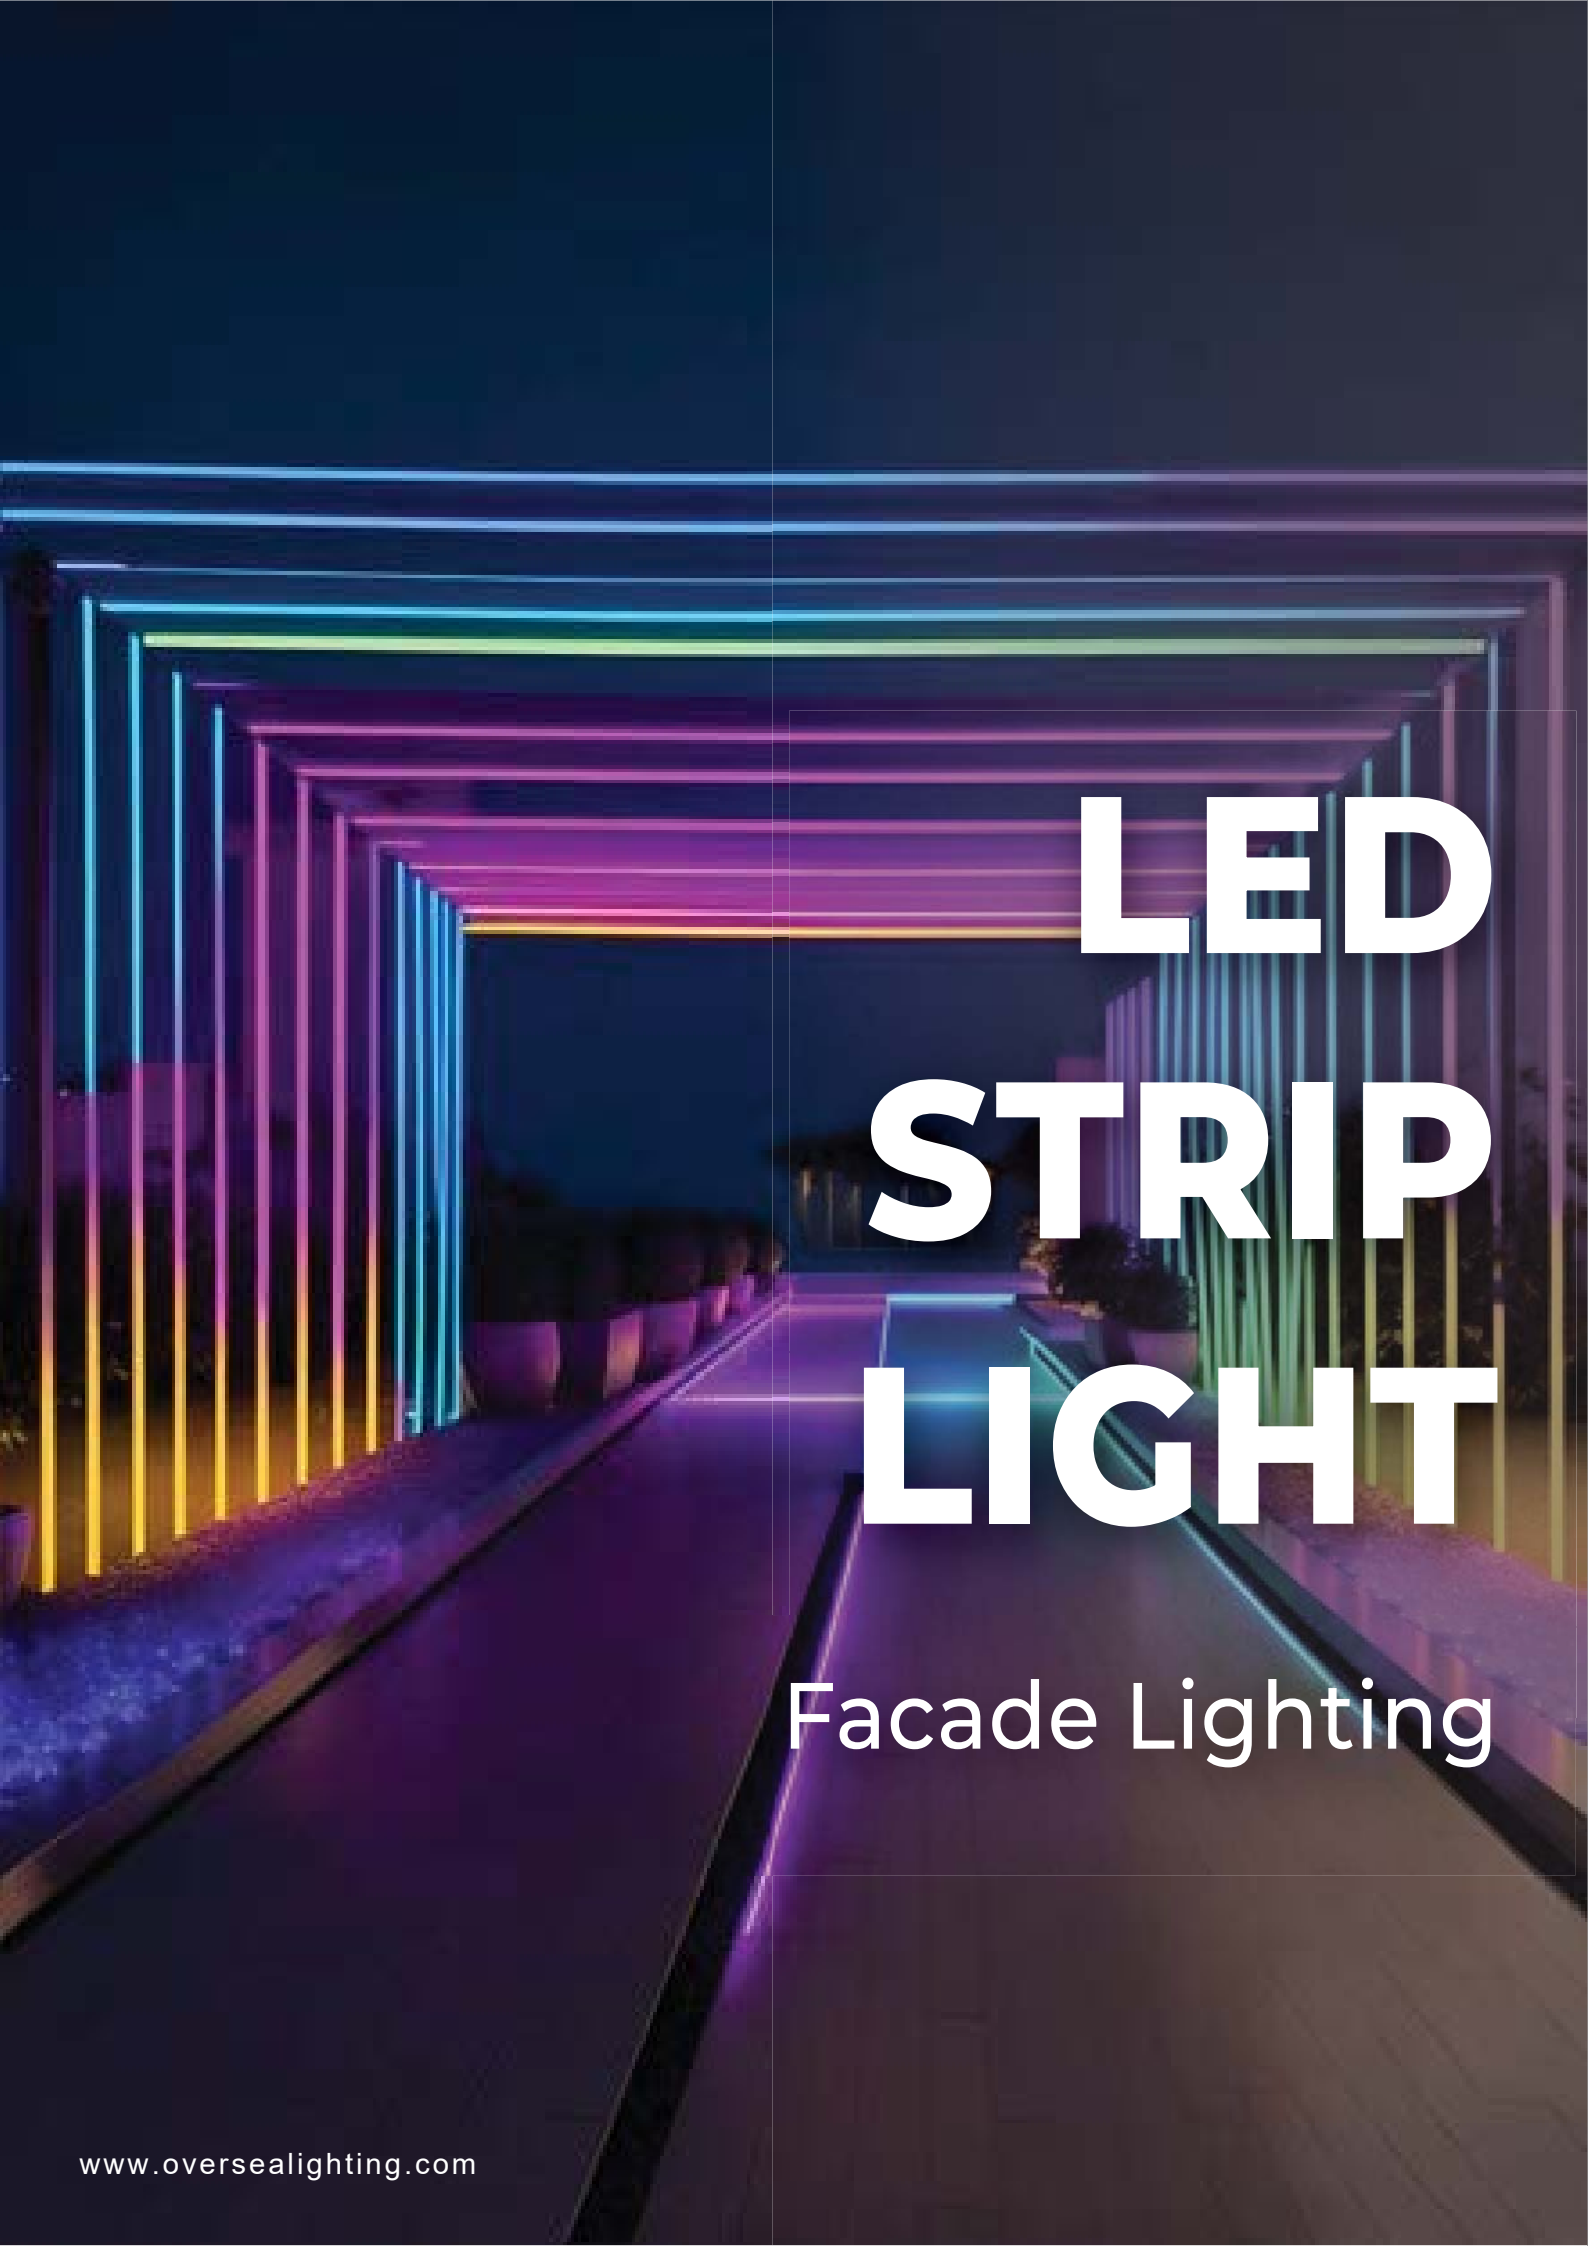

LED STRIP LIGHT


Facade Lighting




OLE-N-1022

CCT	3000K-6000K	RGB	RGBW
Power	8W(12W, 16W)/M	13W/M, 16W/M	17W/M, 21W/M
Control	DMX	DMX	DMX
Dimension	W10mm*H22mm	W10mm*H22mm	W10mm*H22mm
Protection	IP65/IP67	IP65/IP67	IP65/IP67
Voltage	DC24V	DC24V	DC24V
Pixel	4/8/16 pixel	10/12 pixel	10/12 pixel
Housing	Silica gel	Silica gel	Silica gel
PCB width	10mm/12mm	12mm	12mm
Max run length	10M	10M	10M

Dimension



Accessories

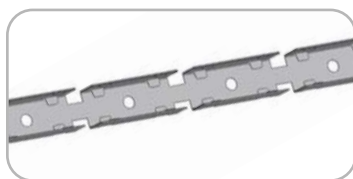

Straight mounting groove (a group fixed clip)



End cap with horizontal direction



End cap with left/right outlet



Fixed clip



End cap with vertical direction



End cap without line




Silicone end cap




OLE-N-1616

CCT	2700K-6000K	RGB	RGBW
Power	12W/M	13W/M, 16W/M	15W/M, 18W/M, 22W/M
Control	Uncontrollable	DMX	DMX
Dimension	W16mm*H16mm	W16mm*H16mm	W16mm*H16mm
Protection	IP65	IP65/IP67	IP65/IP67
Voltage	DC24V	DC24V	DC24V
Pixel	0	10/12 pixel	8/10/12 pixel
Housing	Silica gel	Silica gel	Silica gel
PCB width	10mm	12mm	12mm
Max run length	30M	10M	10M

Dimension

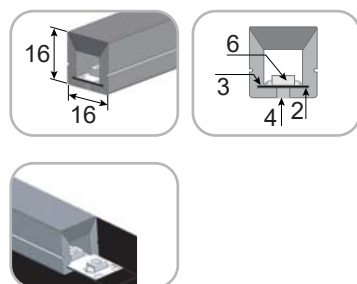

Accessories

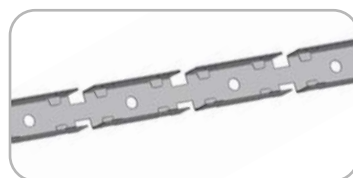

Straight mounting groove (a group fixed clip)



End cap with horizontal direction



End cap with left/right outlet



Fixed clip



End cap with vertical direction



End cap without line



Silicone end cap





OLE-N-2020

CCT	3000K-6000K	RGB	RGBW
Power	8W/M,12W/M,16W/M	13W/M, 16W/M	15W/M,18W/M,22W/M
Control	DMX	DMX	DMX
Dimension	W20mm*H20mm	W20mm*H20mm	W20mm*H20mm
Protection	IP65/IP67	IP65/IP67	IP65/IP67
Voltage	DC24V	DC24V	DC24V
Pixel	4/8/16 pixel	10/12 pixel	8/10/12 pixel
Housing	Silica gel	Silica gel	Silica gel
PCB width	10mm/12mm	12mm	12mm
Max run length	10M	10M	10M

Dimension

Accessories

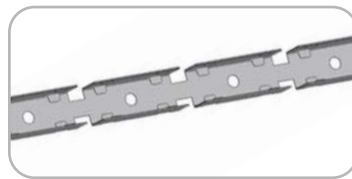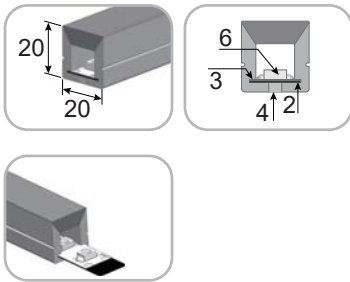

Straight mounting groove (a group fixed clip)



End cap with horizontal direction



End cap with left/right outlet



Fixed clip



End cap with vertical direction



End cap without line



Silicone end cap






OLE-S-1405

CCT	3000K-6000K	RGB	RGBW
Power	8W/M, 12W/M, 15W/M	13W/M, 17W/M	17W/M, 20W/M
Control	DMX	DMX	DMX
Dimension	W14mm*H5mm	W14mm*H5mm	W14mm*H15mm
Protection	IP65	IP65	IP65
Voltage	DC24V	DC24V	DC24V
Pixel	4/8/16 pixel	10/12 pixel	10/12 pixel
Housing	Silica gel	Silica gel	Silica gel
PCB width	10mm	12mm	12mm
Max run length	8M	10M	10M

Dimension

Control System Drawing

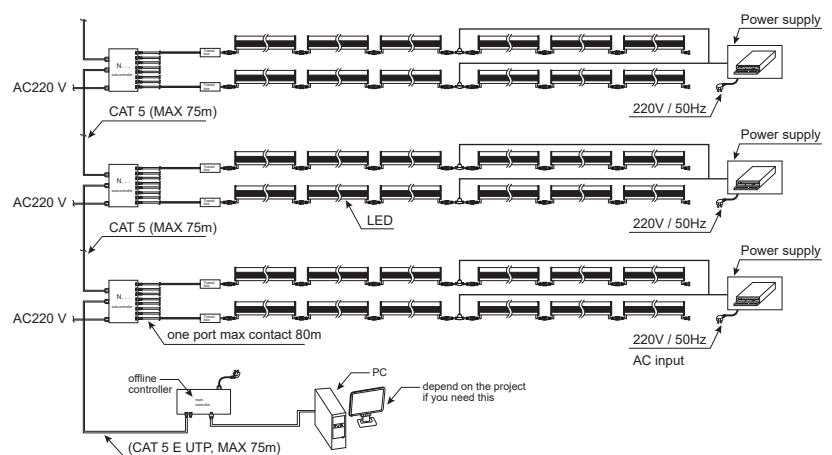

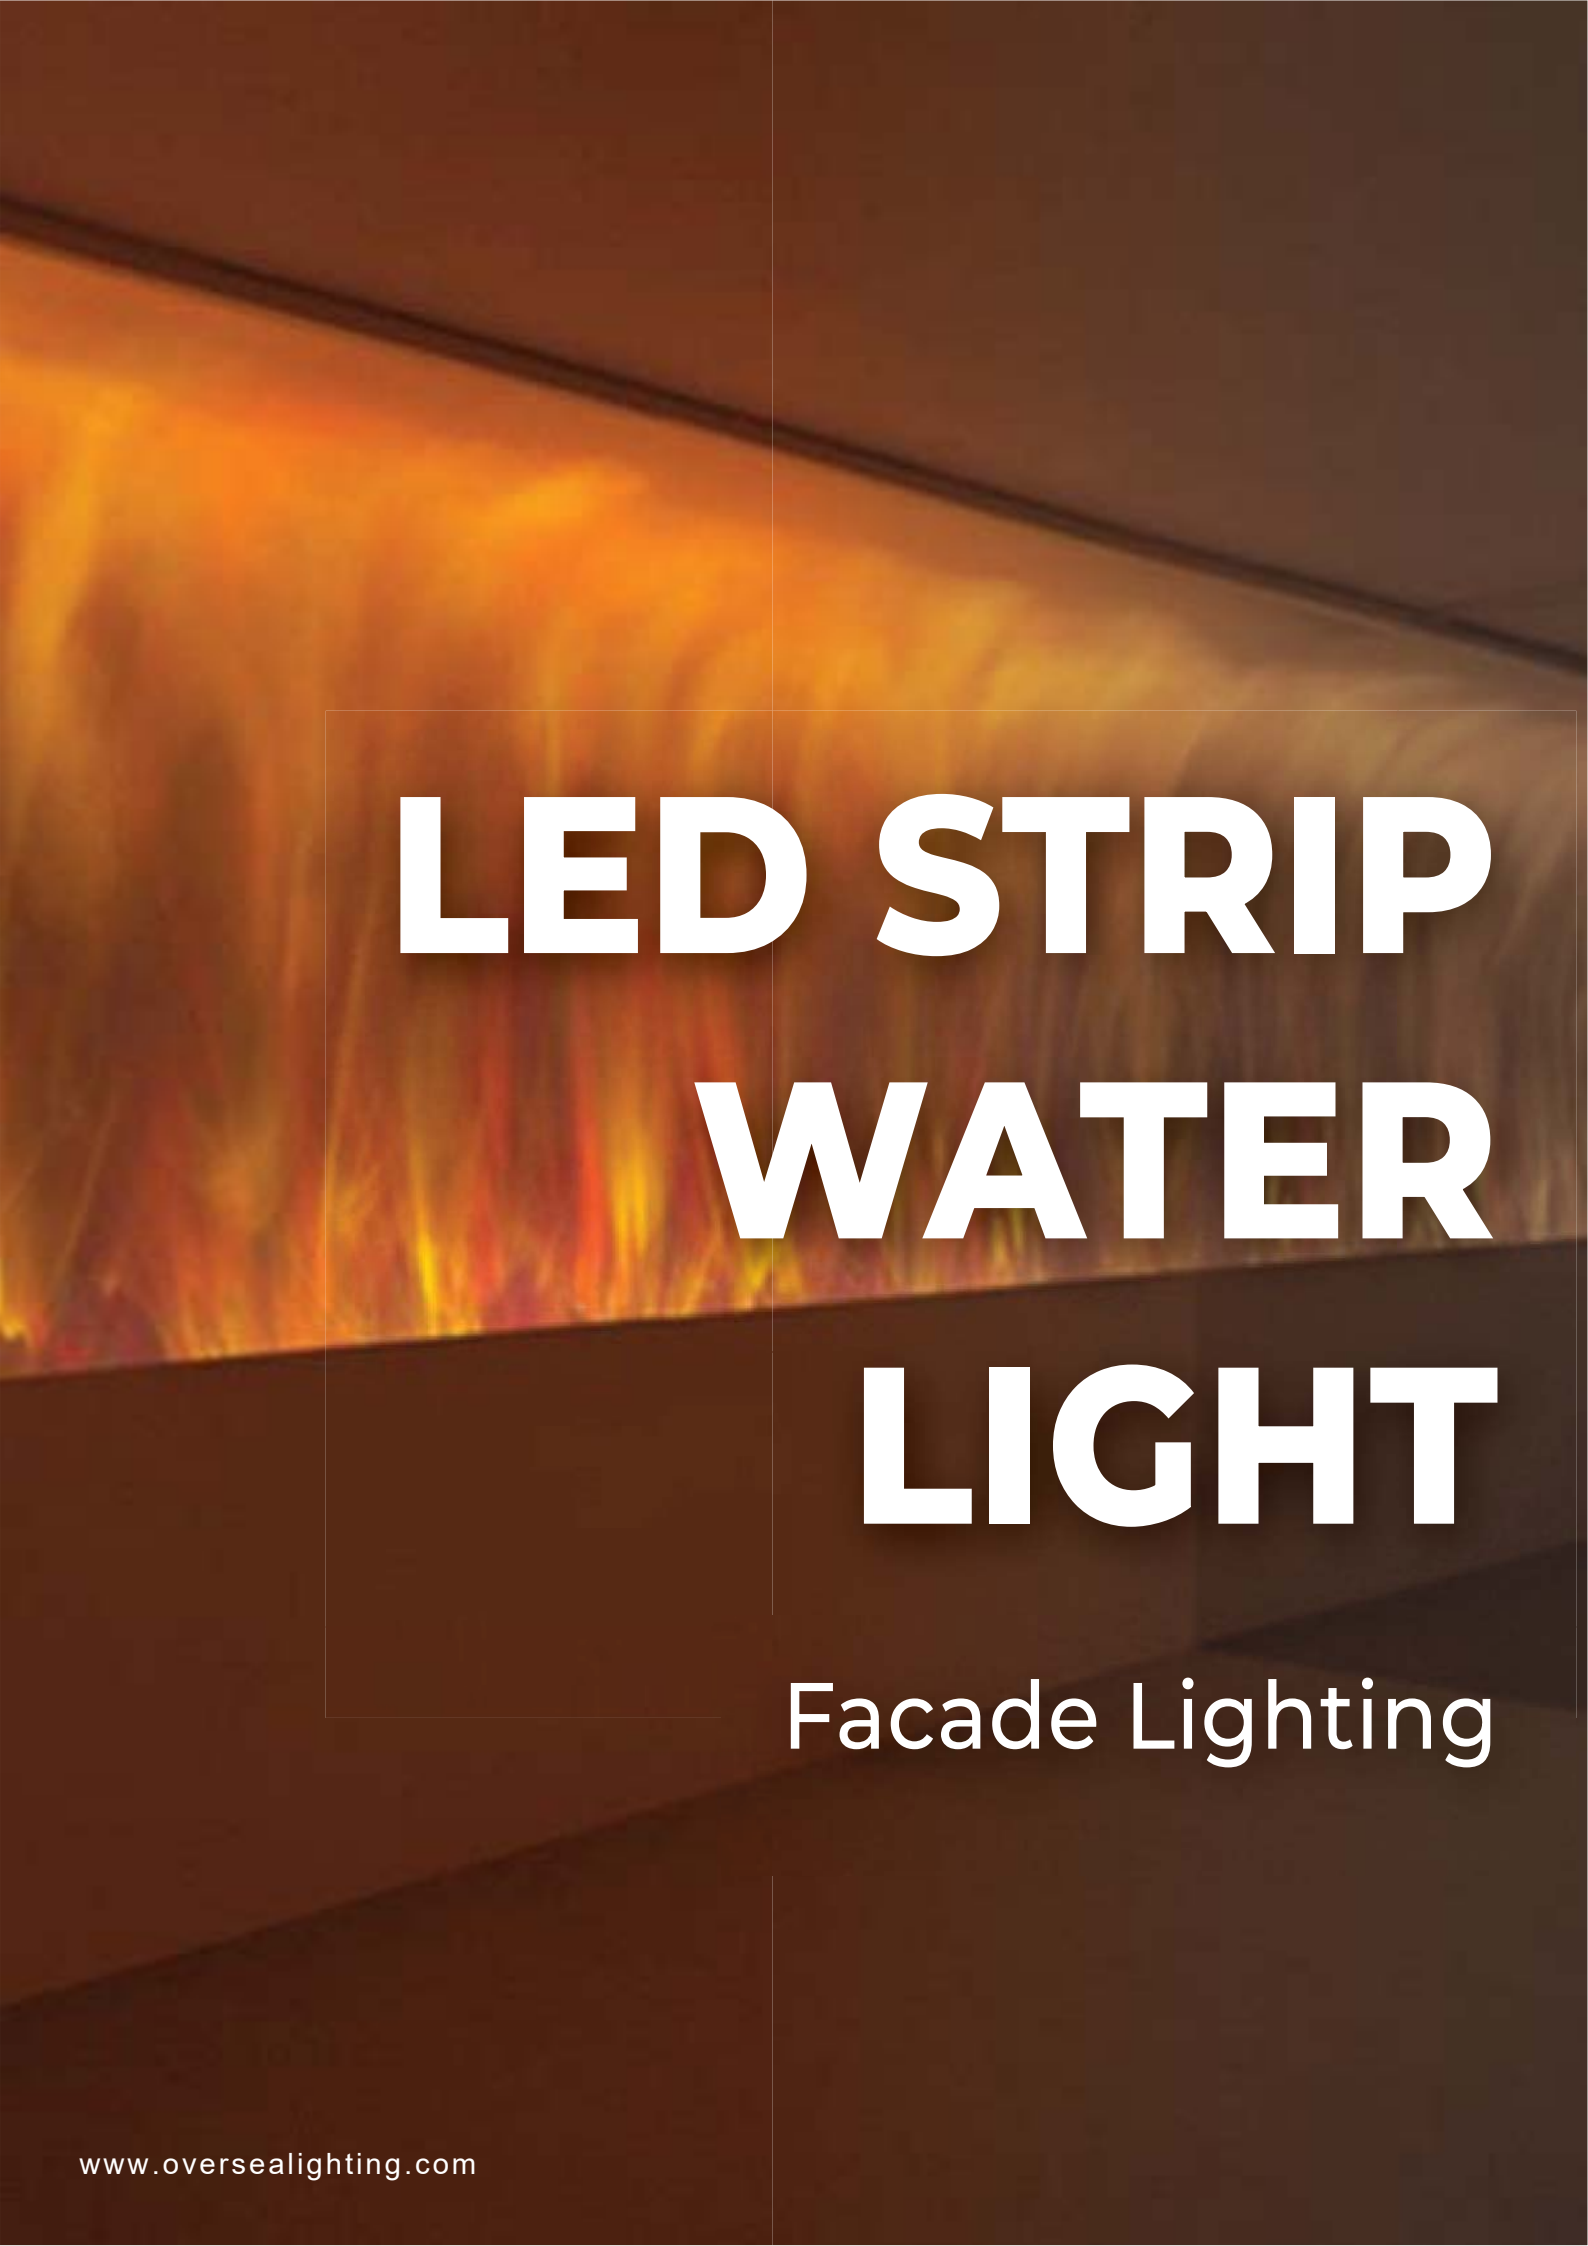

LED STRIP WATER LIGHT


Facade Lighting




Strip water light OLE-SW

Color	RGBW
Power	80W
Lifespan	L90/B10 ≥ 50000H
Beam Angle	50°
Image	rotate / running water effect
Control Method	232 / 485 / DMX512 / Self-running mode
Communication	DMX512 Protocol, ARTNET Protocol
Signal Interface	DMX512 interface
Intelligent Control	DMX512 / Automatic operation / Master - slave
Temp Control Method	Thermal conduction through integral aluminum profile
Protection	IP66
Modulation Method	DC24V / 110-250VAC 50/60Hz
Rated Power	Max 120W
Environment	Temperature: -15°C - 45°C, relative humidity <95%
Safety Standard	Follow the IEC60825 standard
Dimension	L1065 * W95 * H157mm
Weight	5KG

Dimension

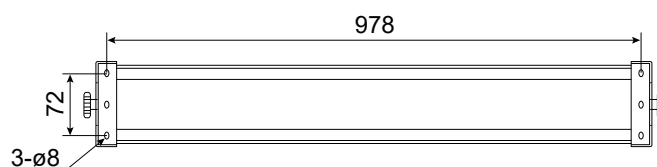


Lighting Effect

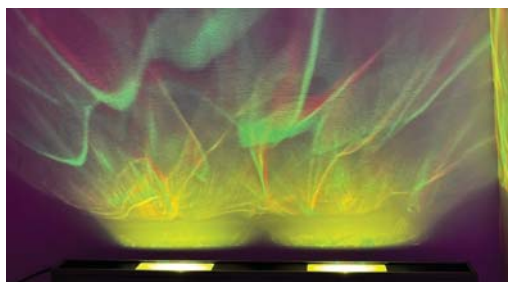



LED WALL LIGHT

Landscape Lighting

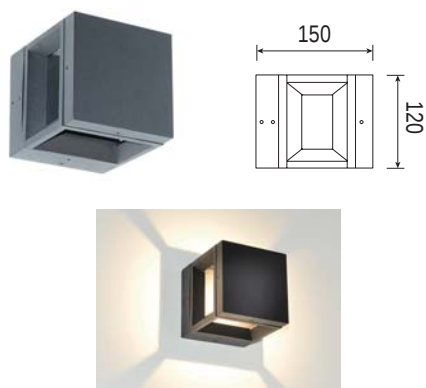**OLE DHK 9201**

Power	7W
CCT	3000K / 6000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Glass
Gasket	Made of Thermostable Silica Gel
Carton	690*280*370mm (20 pcs per carton-26kg/carton)
Efficiency	50lm/W

**OLE DHK 9202**


Power	7W
CCT	3000K / 6000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Glass
Gasket	Made of Thermostable Silica Gel
Carton	420*280*430mm (12 pcs per carton-23kg/carton)
Efficiency	50lm/W

**OLE DHK 9204**

Power	10W
CCT	3000K / 6000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Glass
Gasket	Made of Thermostable Silica Gel
Carton	510*240*630mm (6 pcs per carton-13kg/carton)
Efficiency	50lm/W

**OLE DHK 9199**

Power	9W
CCT	3000K / 6000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Glass
Gasket	Made of Thermostable Silica Gel
Carton	660*260*590mm (6 pcs per carton-13kg/carton)
Efficiency	50lm/W

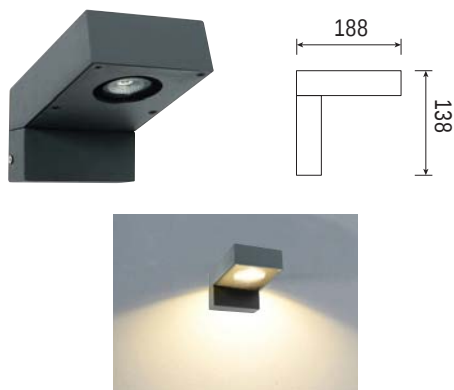**OLE DHK 9082**


Power	10W
LED Type	COB
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Aluminum
Diffuser	Clear Glass
Finishing	Dark Grey UV-Proof Powder Coating
Carton	420*420*350mm (12 pcs per carton-16kg/carton)
Efficiency	50lm/W

**OLE DHK 9093**

Power	10W
LED Type	COB
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Aluminum
Diffuser	Clear Glass
Finishing	Dark Grey UV-Proof Powder Coating
Carton	690*280*370mm (12 pcs per carton-17kg/carton)
Efficiency	50lm/W

**OLE DHK 9097**

Power	10W
LED Type	COB
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Aluminum
Diffuser	Clear Glass
Finishing	Dark Grey UV-Proof Powder Coating
Carton	690*280*370mm (20 pcs per carton-17kg/carton)
Efficiency	50lm/W

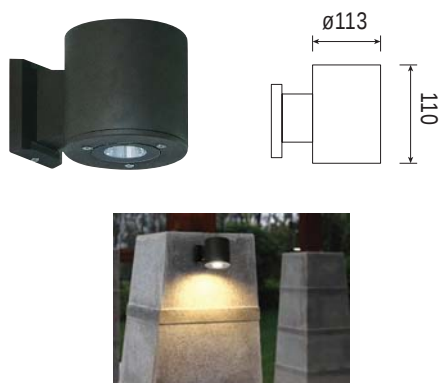
**OLE DHL 1671**

Power	10W
LED Type	COB
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Aluminum
Diffuser	Glass
Finishing	Dark Grey UV-Proof Powder Coating
Carton	660*300*420mm (20 pcs per carton-17kg/carton)
Efficiency	50lm/W



LED STEP LIGHT


Landscape Lighting



Recessed step light

OLE DHK 9231


Power	3W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Clear Tempered Glass
Gasket	Made of Thermostable Silica Gel to Improve Protection Class
Carton	390*390*245mm (18 pcs per carton-23kg/carton)
Efficiency	40lm/W



Recessed step light

OLE DHK 9232


Power	8W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Clear Tempered Glass
Gasket	Made of Thermostable Silica Gel to Improve Protection Class
Carton	390*390*290mm (8 pcs per carton-17.5kg/carton)
Efficiency	40lm/W



Recessed step light

OLE DHK 9233


Power	3W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Clear Tempered Glass
Gasket	Made of Thermostable Silica Gel to Improve Protection Class
Carton	390*390*245mm (16 pcs per carton-15kg/carton)
Efficiency	40lm/W



Recessed step light

OLE DHK 9234


Power	3W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Clear Tempered Glass
Gasket	Made of Thermostable Silica Gel to Improve Protection Class
Carton	390*390*245mm (16 pcs per carton-15kg/carton)
Efficiency	40lm/W



Recessed step light

OLE DH 3805



Power	6W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Aluminum
Diffuser	Glass
Finishing	Matt Black UV-Proof Powder Coating
Carton	490*430*510mm (12 pcs per carton-16kg/carton)
Efficiency	40lm/W



Recessed step light

OLE DH 3806



Power	6W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Aluminum
Diffuser	Glass
Finishing	Matt Black UV-Proof Powder Coating
Carton	540*420*290mm (6 pcs per carton-17kg/carton)
Efficiency	40lm/W



Recessed step light

OLE DH 3704


Power	6W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Aluminum
Diffuser	Glass
Finishing	Matt Black UV-Proof Powder Coating
Carton	425*265*290mm (10 pcs per carton-7.2kg/carton)
Efficiency	40lm/W




Recessed step light

OLE DH 3705

Power	6W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Aluminum
Diffuser	Glass
Finishing	Matt Black UV-Proof Powder Coating
Carton	425*265*290mm (10 pcs per carton-7.2kg/carton)
Efficiency	40lm/W

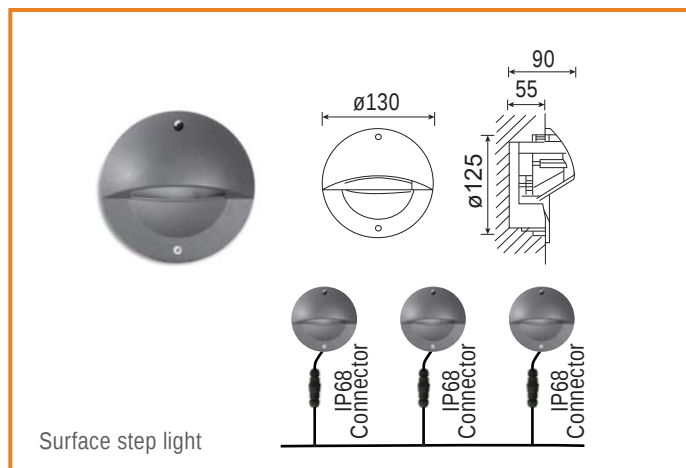**OLE DHK 9242**

Power	3W
CCT	3000K / 6000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Glass / PMMA
Gasket	Made of Thermostable Silica Gel to Improve Protection Class
Carton	140*140*125mm (12 pcs per carton-7kg/carton)
Efficiency	40lm/W

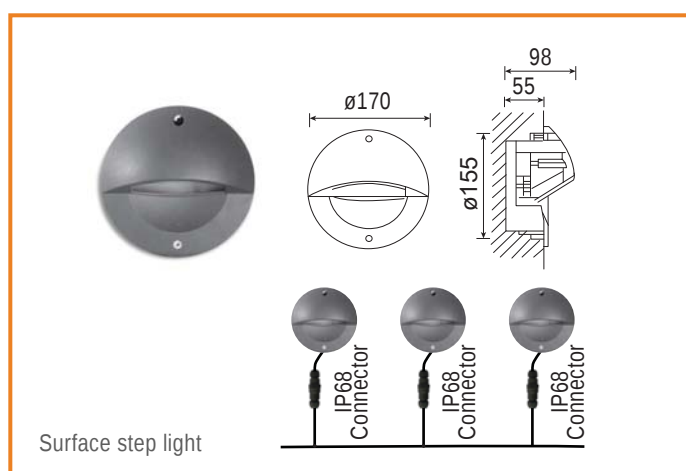**OLE DHK 9243**

Power	8W
CCT	3000K / 6000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Glass / PMMA
Gasket	Made of Thermostable Silica Gel to Improve Protection Class
Carton	450*305*280mm (8 pcs per carton-6kg/carton)
Efficiency	40lm/W

**OLE DH 5241**

Power	4W
CCT	3000K / 4000K / 6000K
Protection	IP65
Input Voltage	DC24V
Material	UV Powder Coated Die-Cast High Quality Aluminum Body
Beam Angle	15° - 90°
Diffuser	Glass
Gasket	Silicone Rubber Gasket and Stainless Steel Screws
Carton	330*560*450mm (30 pcs per carton-18kg/carton)
Efficiency	40lm/W





OLE DHZ-1506-3W


Power	3W
Color	RGB
Protection	IP65
Input Voltage	DC240V
Material	Aluminum
Diffuser	Glass
Finishing	Grey UV-proof powder coating
Control	DMX512



OLE DHZ-1506-15W


Power	15W
Color	RGB
Protection	IP65
Input Voltage	DC240V
Material	Aluminum
Diffuser	Glass
Finishing	Grey UV-proof powder coating
Control	DMX512



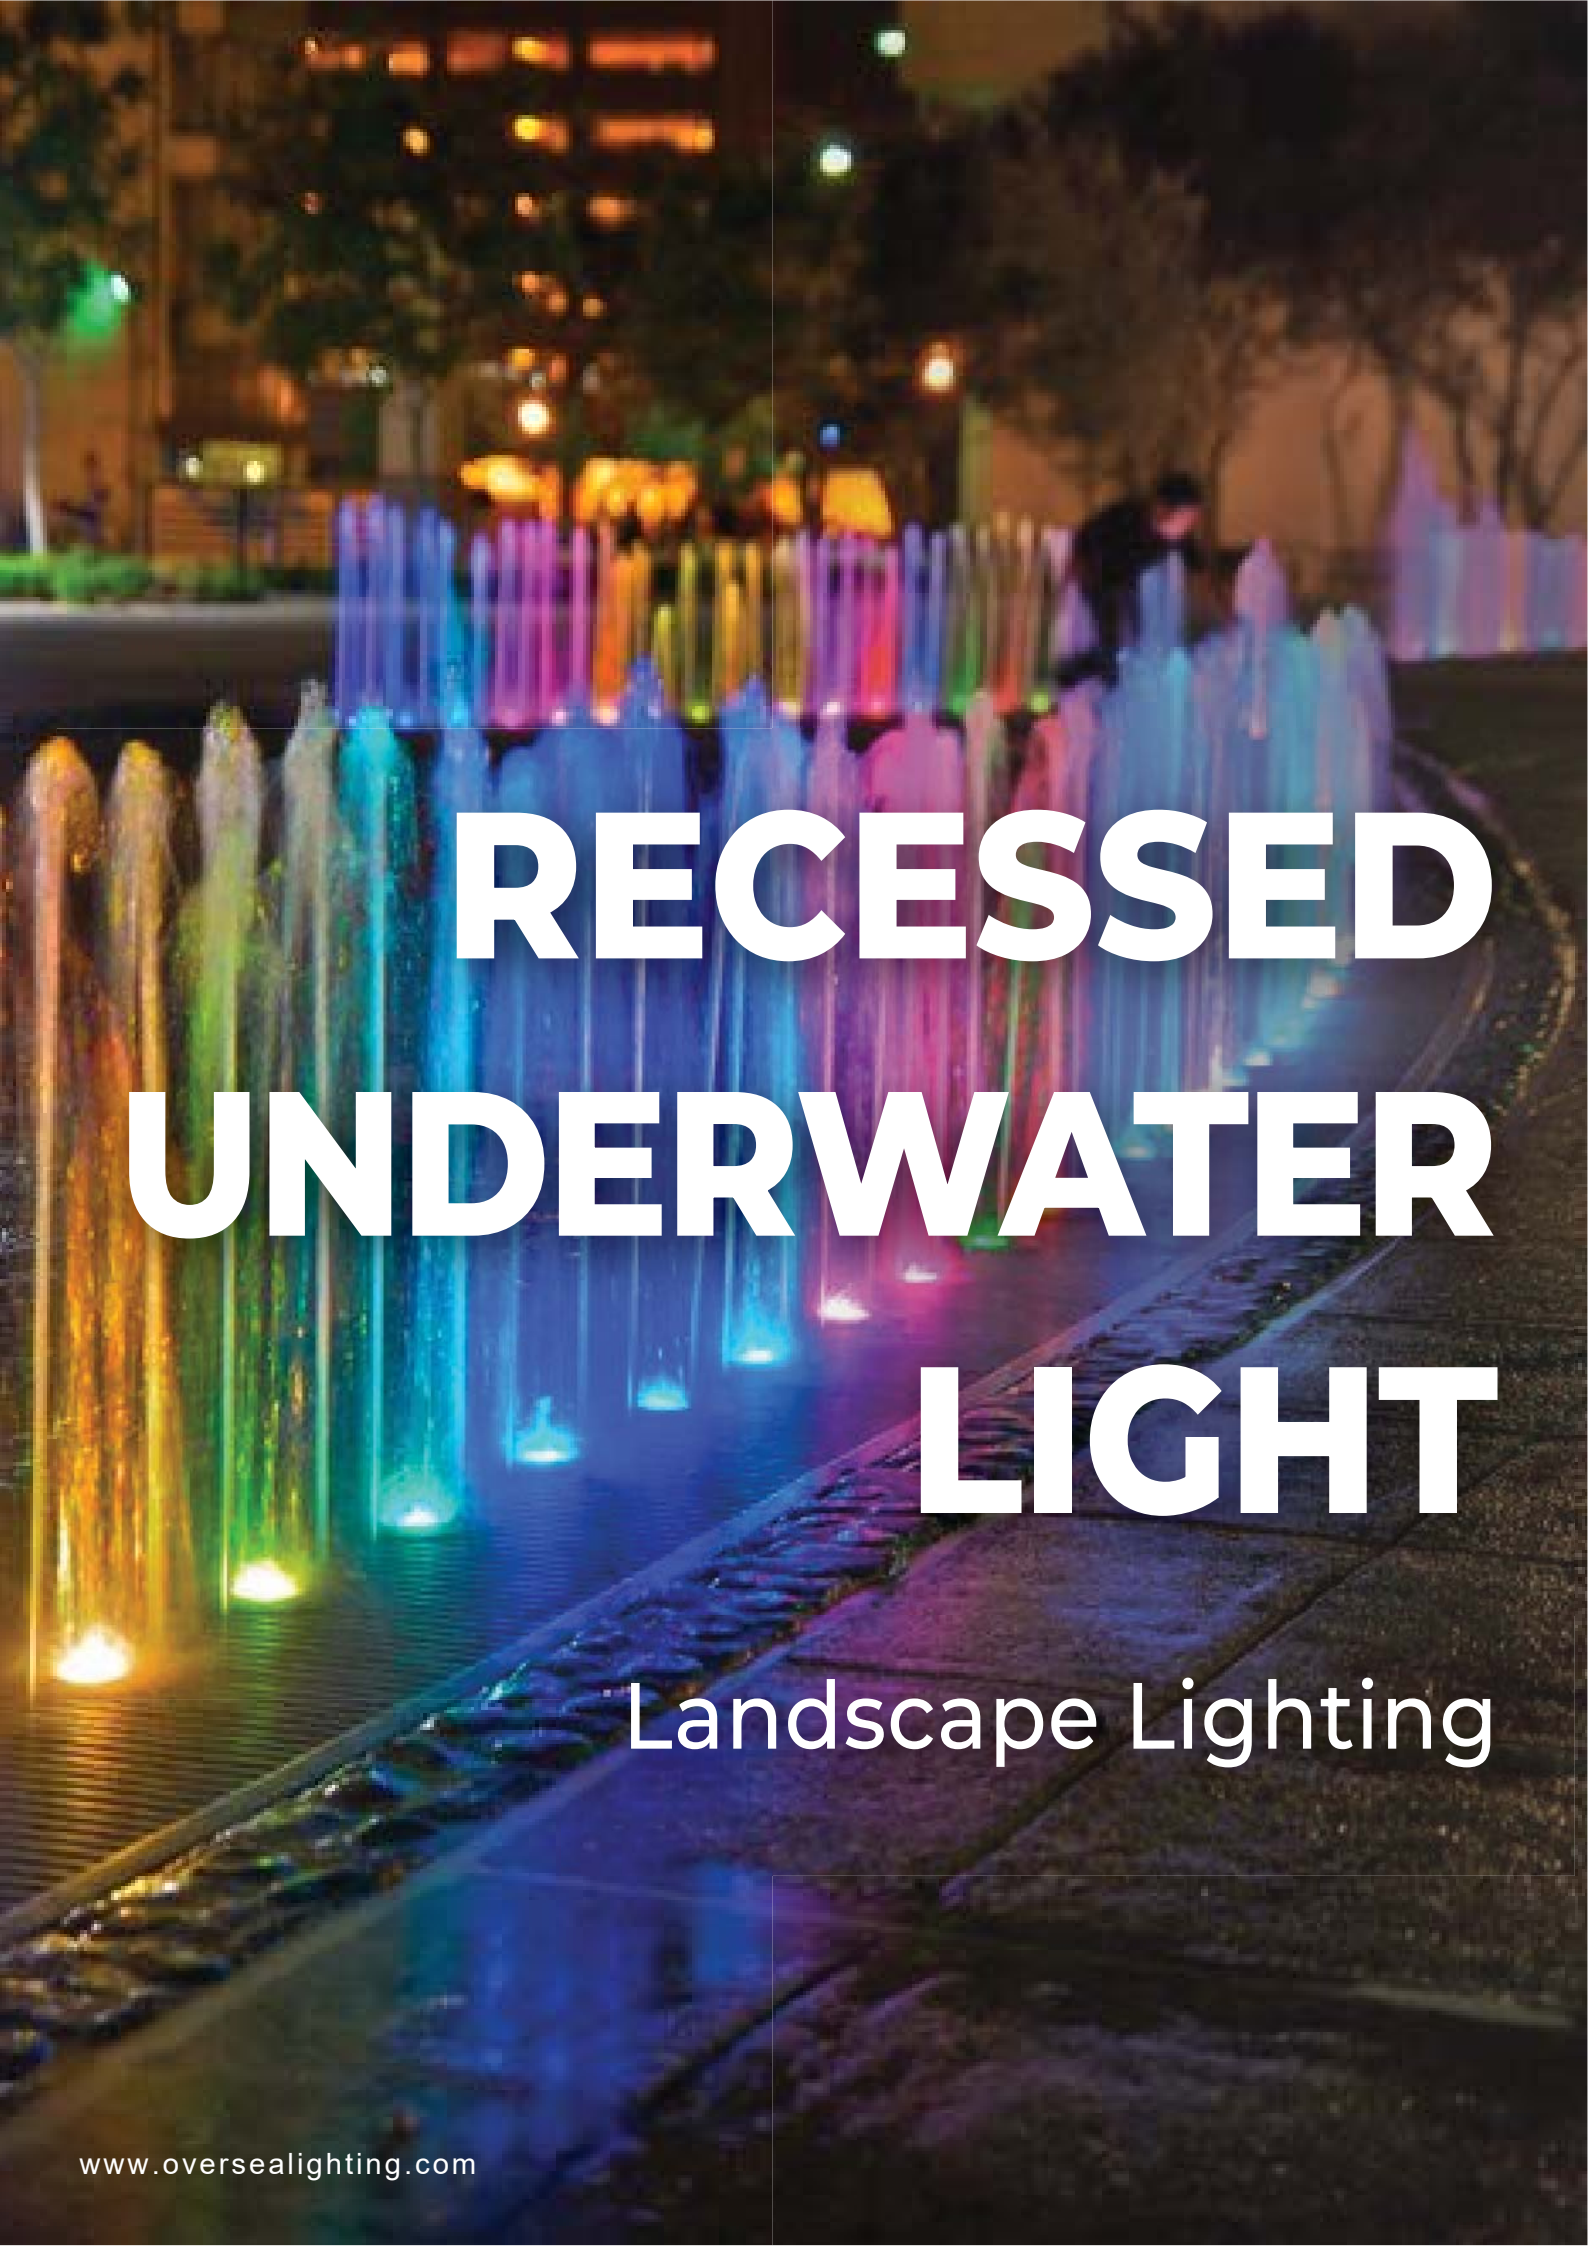


RECESSED UNDERWATER LIGHT

Landscape Lighting

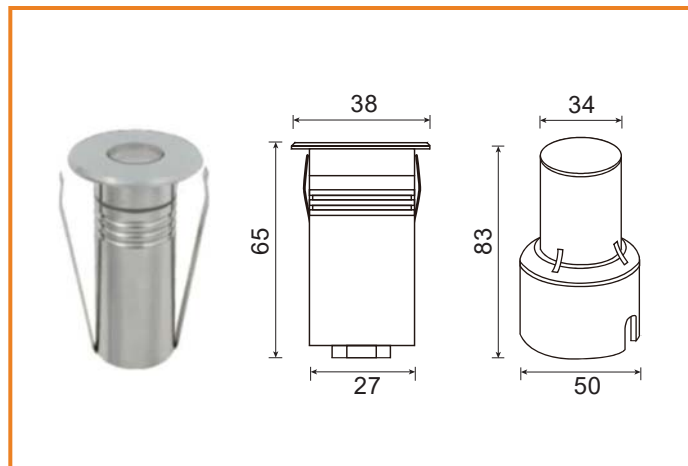


OLE-D111930

Power	1.5W
Input Voltage	DC24V
CCT	3000K, 4000K
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	1
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

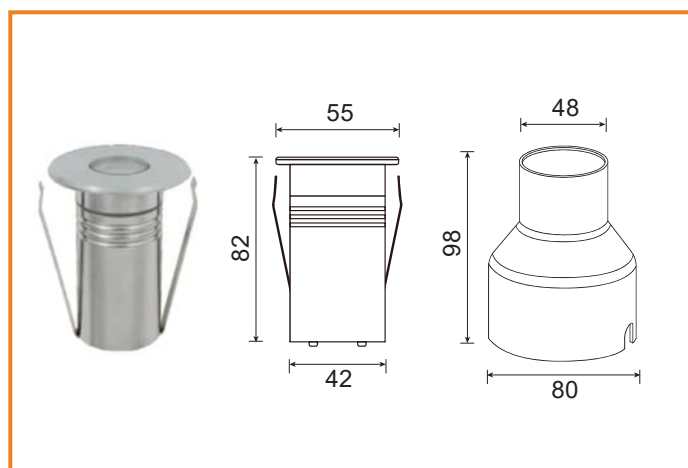


OLE-D111931

Power	2W
Input Voltage	DC24V
CCT	3000K, 4000K
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	1
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

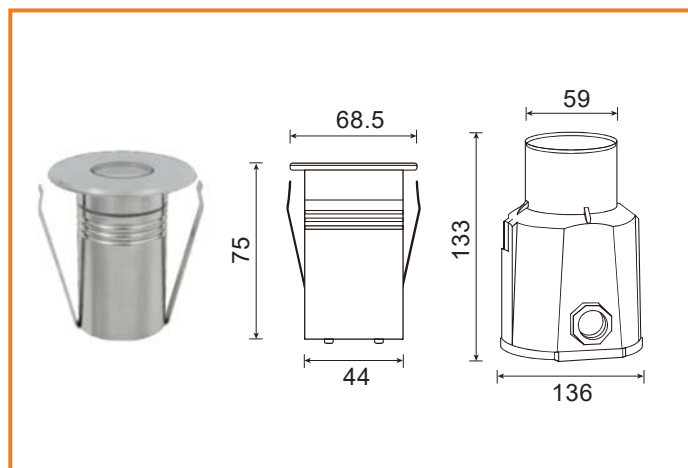


OLE-D111932

Power	2W
Input Voltage	DC24V
CCT	3000K, 4000K
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	1
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

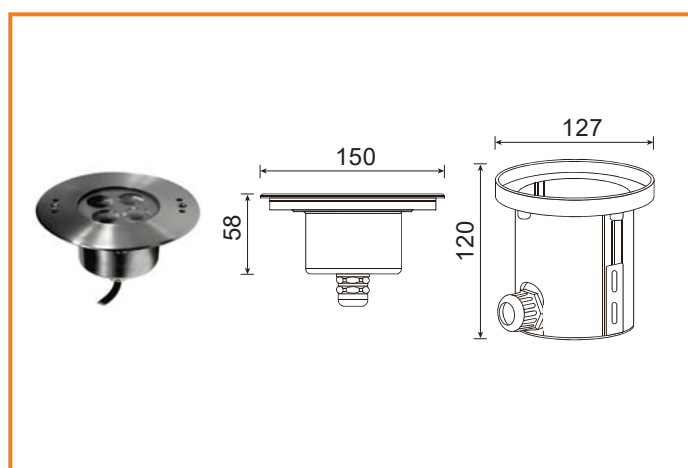

OLE-D111935

Power	8W, 12W, 16W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	4
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

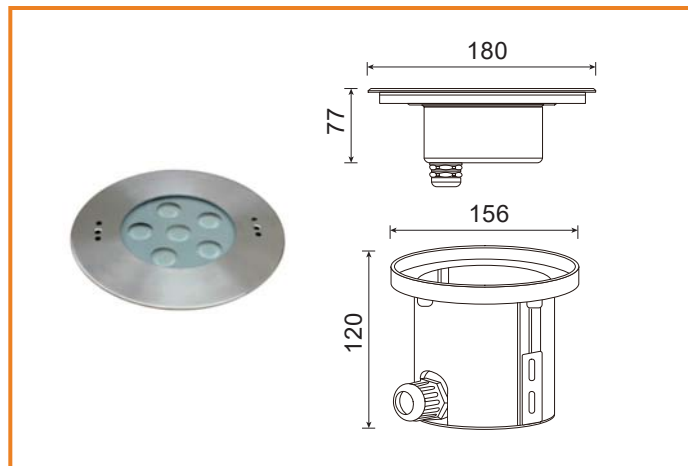


OLE-D111936

Power	12W, 18W, 24W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	6
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve




OLE-D111941

Power	24W, 36W, 48W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	12
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

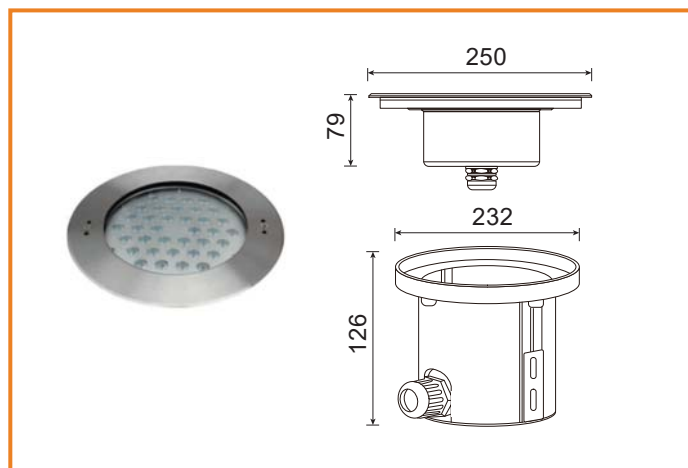


OLE-D111945

Power	36W, 54W, 72W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	18
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

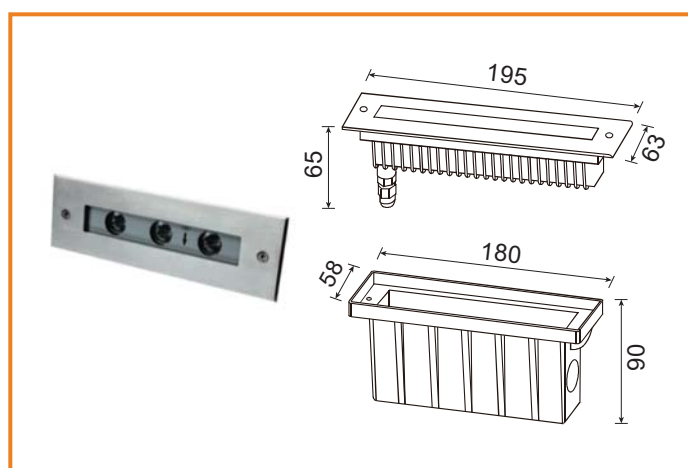


OLE-D111947

Power	6W, 9W, 12W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	3
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

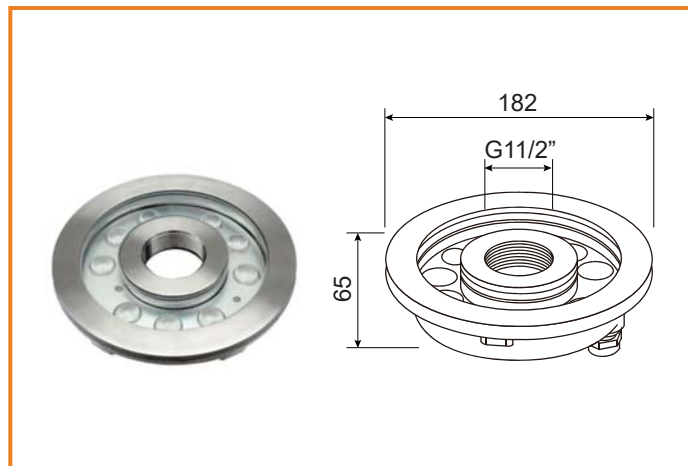


OLE-Q112211

Power	18W, 27W, 36W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	9
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

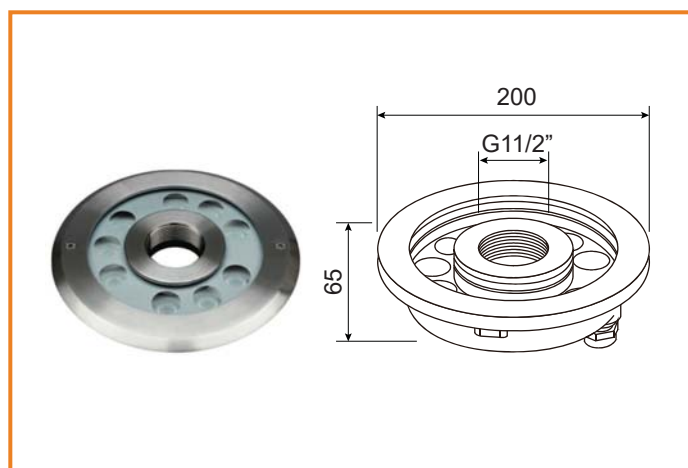


OLE-Q112212

Power	18W, 27W, 36W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	9
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

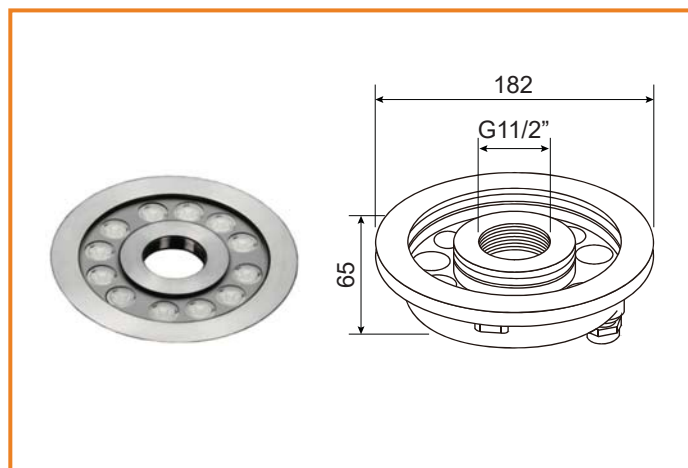

OLE-Q112213

Power	24W, 36W, 48W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	12
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

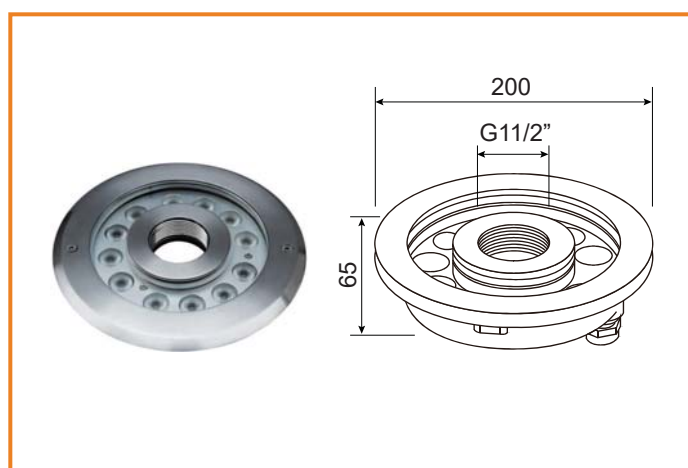

OLE-Q112214

Power	24W, 36W, 48W
Input Voltage	DC24V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	25°, 30°, 40°, 60°
Led Quantity	12
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	8mm Tempered Glass
Protection	IP68
Material	Hard chromeplated stainless steel SUS 316
Accessories	ABS mounting sleeve

A night-time photograph of an outdoor wooden deck. A bright blue projection light is mounted on a post, casting a wide, fan-shaped beam of light onto the deck's surface. The light creates a series of concentric, wavy patterns on the wooden planks. In the background, there are dark silhouettes of trees and a fence. The overall scene is illuminated with a cool blue light, with some red light visible in the upper right background.

OUTDOOR PROJECTION LIGHT


Landscape Lighting



OLE AU300

Power	300W
Brightness	3000lm
Resolution	1080p
Weight	8 kg
Size	453 * 272 * 190 mm
Contrast	2,500,000:1 (Ratio 1.0:1)
Light Source	Laser Light Source
Lamp Life	Normal mode: 20000h, Eco mode: 30000h
Protection	IP65
Display Panel	3LCD * 0.62 inch RGB light value LCD projection system
Power Supply	100-240V AC, 50/60Hz


Dimension

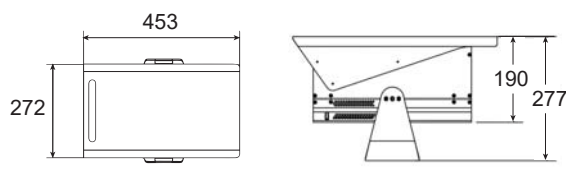

OLE BW500ST / DU750ST

Power	550W	750W
Brightness	5000lm	7500lm
Resolution	1280 * 800	1920 * 1200
Weight	35 kg	39 kg
Size	540 * 450 * 230 mm	650 * 550 * 230 mm
Contrast	2,000,000:1 (Ratio 0.52:1 / 1.19-2.03:1)	
Light Source	Laser Light Source	
Lamp Life	Normal mode: 20000h, Eco mode: 30000h	
Protection	IP65	
Display Panel	3LCD * 0.64 inch Liquid Crystal Display	
Power Supply	100-240V AC, 50/60Hz	

Dimension




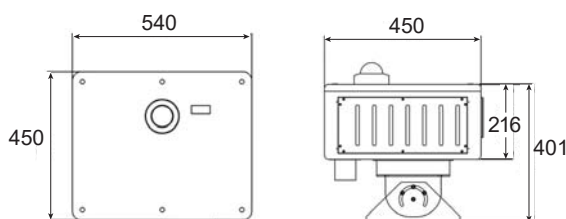




OLE EP-B600

Power	350W
Brightness	13900lm
CCT	6500K
Weight	13 kg
Size	307 * 310 * 363 mm
Input Voltage	AC110-220V
Light Source Life	50,000 Hours
Protection	IP66
Control Mode	DMX512 / Internal Control / Offline
Water Pattern	Two independent effect pattern discs, double discs linkage to create a vivid water ripples

Dimension

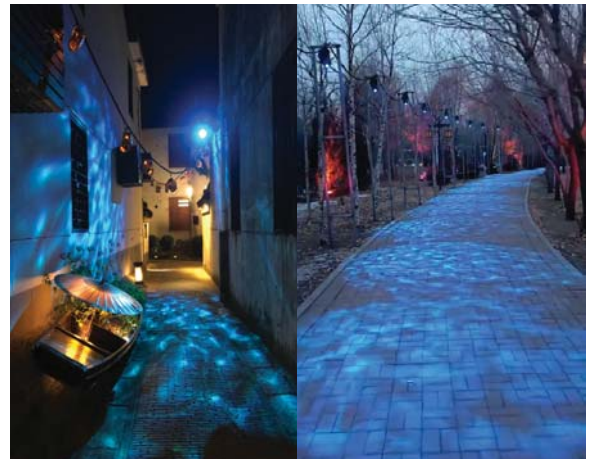



LED DRIVER HLG 120V

Model	Power
HLG-40H-12A	40W
HLG-60H-12A	60W
HLG-80H-12A	80W
HLG-120H-12A	120W
HLG-150H-12A	150W
HLG-185H-12A	185W
HLG-240H-12A	240W
HLG-320H-12A	320W
HLG-480H-12A	480W
HLG-600H-12A	600W



LED DRIVER HLG 240V


Model	Power
HLG-40H-24A	40W
HLG-60H-24A	60W
HLG-80H-24A	80W
HLG-100H-24A	100W
HLG-120H-24A	120W
HLG-150H-24A	150W
HLG-185H-24A	185W
HLG-240H-24A	240W
HLG-320H-24A	320W
HLG-480H-24A	480W
HLG-600H-24A	600W

Features

- Constant Current Mode + Constant Voltage Mode output
- Metal casing, Class I design
- IP65 protection rating, suitable for indoor and outdoor installation
- Constant current output and constant voltage output values can be adjusted via the built-in potentiometer
- Lifespan > 62,000 hours

Model Code

HLG - 120H - 24 A

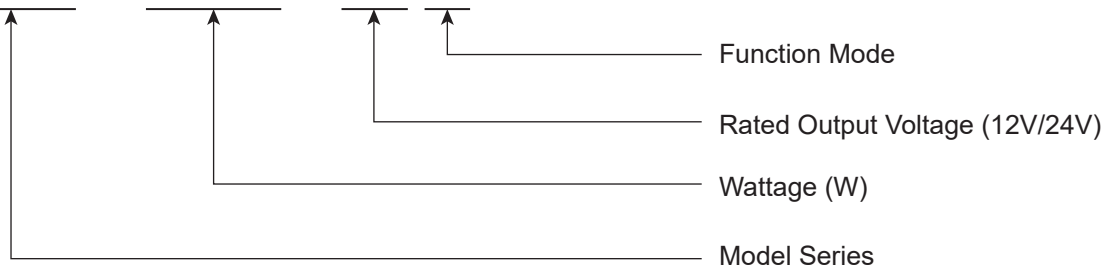



LED DRIVER X6E-G

Model	Power
X6E-G-75W	75W
X6E-G-100W	100W
X6E-G-150W	150W
X6E-G-200W	200W
X6E-G-240W	240W
X6E-G-320W	320W

Features

- Input voltage: 90 ~ 305Vac
- Isolated constant power design
- 3-in-1 dimmable: 0-10V/1-10V/PWM (Dim-to-off optional)
- Timers dimming; Reverse dimming optional
- 3 Timers dimming: Timing; Virtual Midnight; Self-Adaptive
- Output and Dimming Signal Isolating
- Off-line programmable
- (M types) output current adjustable by programmer
- Surge protection: DM 6KV, CM 10KV
- Protections: output SCP / OVP / OTP
- Ingress protection rating: IP67




LED DRIVER VH-E

Model	Power
SS-75VH-E	75W
SS-100VH-E	100W
SS-150VH-E	150W
SS-200VH-E	200W
SS-240VH-E	240W
SS-320VH-E56BH	320W

Features

- Isolated dimming: 0-10V, PWM, Resistor
- Timing and Negative logic programmable
- Communication Function with PC
- Protections: SCP / OTP / OVP / OPP
- Type HL, suitable for hazardous locations
- Surge protection: DM 6KV, CM 10KV
- Ingress protection rating: IP67




Standalone and Offline Mode DMX

OLE-K-8000C

Power Consumption	5W
Storage Power	DC 5V / DC 12-24V input
Working Temperature	-20°C ~ 75°C
Weight	0.8 Kg

Memory Card

Type	SD Card
Capacity	128MB - 32GB
Format	FAT or FAT32
Storage File	*.led




Online and Offline Mode DMX

OLE-XB-809

Power Consumption	10W
Operating Power	AC110-240V
Working Temperature	-10°C ~ 60°C
Weight	2 Kg

Memory Card


Type	SDHC Card
Capacity	4GB - 32GB
Format	FAT or FAT32
Storage File	*.BIN



Online and Offline Mode DMX

OLE-T760K

Power Consumption	10W
Operating Power	AC100-240V
Working Temperature	-20°C ~ 75°C
Weight	1.5 Kg




Signal Booster


OLE-ZJ-V6

Transmission Distance	50-100m
Operating Power	DC12-60V
Working Temperature	-20°C ~ 65°C
Weight	1.5 Kg

Standalone and Offline Mode DMX Signal Wiring Diagram

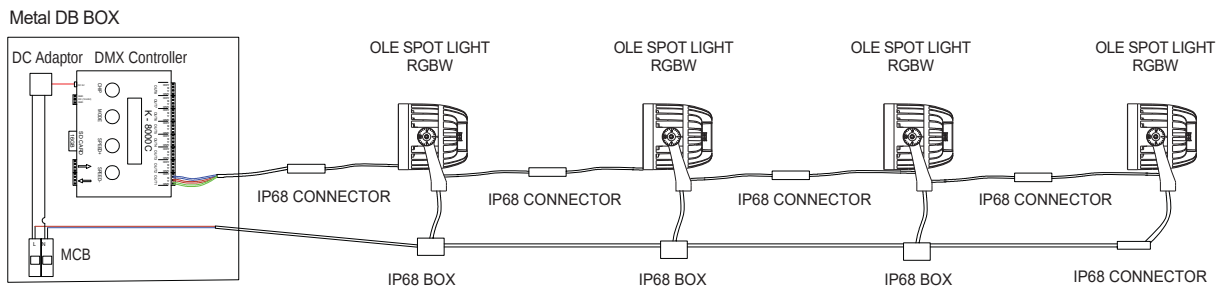

Online and Offline Mode DMX Signal Wiring Diagram

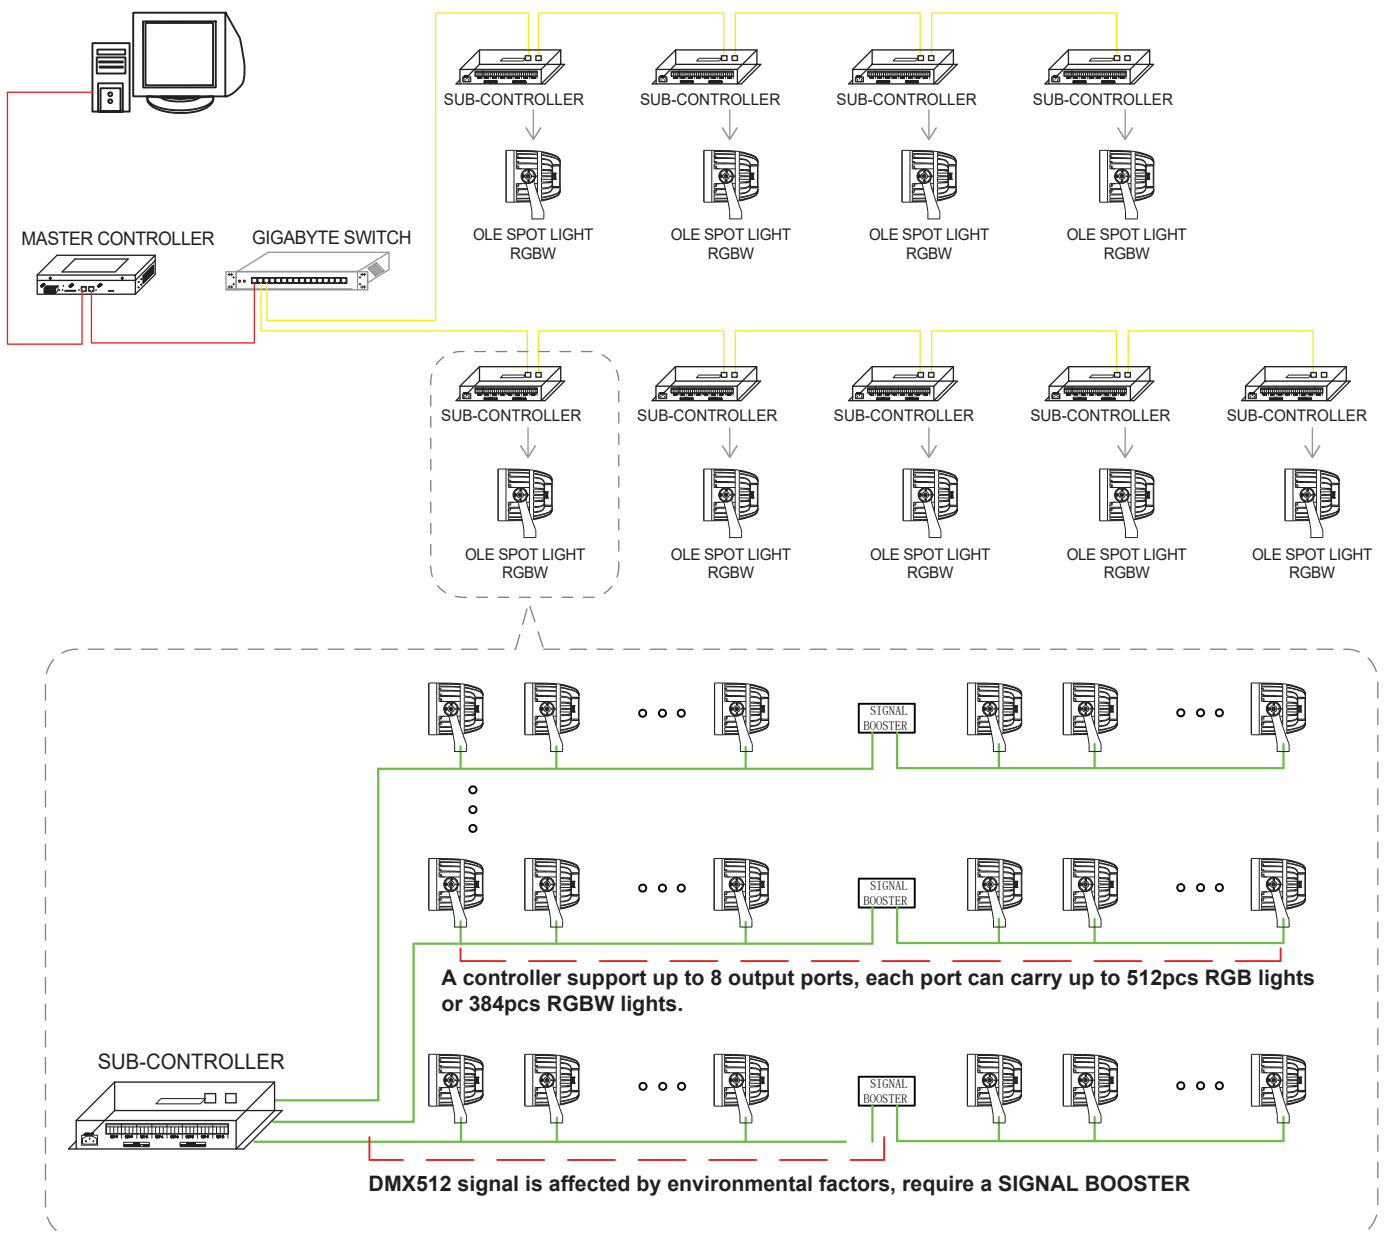

LEDEdit

LEDEdit is a popular LED programming software designed for pixel LED and architectural lighting control. It is widely used in building facades, stage lighting, and creative lighting displays due to its simple interface and flexible control options.


Key Features

- Supports a variety of LED controllers and pixel mapping.
- User-friendly interface for creating effects and animations.
- Ideal for architectural lighting and display screens.

Hardware

Basic: Controller OLE-K-8000C

Advanced: Master Controller OLE-XB-809 + Sub-Controller OLE-T760K

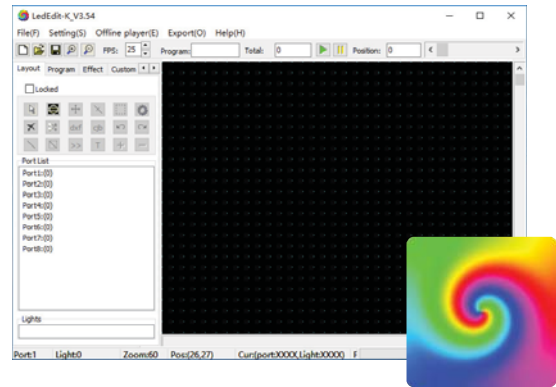

Madrix

Madrix is a professional lighting control software designed for DMX, Art-Net, and pixel-based LED installations. Known for its real-time performance and creative flexibility, it is widely used in stage shows, concerts, and large-scale architectural projects.

Key Features

- Real-time generation of dynamic lighting effects.
- Advanced audio-to-light synchronization.
- Scalable from small projects to large installations.

Hardware

Setup: PC running Madrix + Sub-Controller OLE-T760K (for DMX/Pixel output)



Pharos Control

Pharos Control is a powerful, network-based lighting control system designed for architectural, façade, and entertainment lighting. Known for its reliability and flexibility, it offers advanced scheduling, triggering, and integration features suitable for permanent installations.

Key Features

- Fully customizable lighting timelines and triggers.
- Scalable system with network-based control.
- Designed for permanent installations such as facades, landmarks, and themed attractions.

Hardware - Pharos Designer



LPC

Lighting Playback Controller



VLC

Video Lighting Controller



TPS

Touch Panel Station



BPS

Button Panel Station



RIO

Remote Input Output



END

Ethernet Data Node



SDI



REPEAT



Switch

OVERSEA LIGHTING & ELECTRIC (M) SDN. BHD.

(272782-K)



LED Factory

Lot 6595, Jalan KPB12B, Kawasan Industri Kampung Baru Balakong,
43300 Seri Kembangan, Selangor Darul Ehsan, Malaysia.

Tel: +603-8964 1878, 8964 1888, 8964 1899

Fax: +603-8964 1868

Email: info@oversealighting.com, sales@oversealighting.com

Web: www.oversealighting.com

Pole Factory

PT3481 (Lot996), Jalan Sungai Lalang Batu 22 1/2,
43500 Semenyih, Selangor Darul Ehsan, Malaysia.

Tel: +603-9549 3440, +60 12-837 7850

Email: general.odi@outlook.com