



SINCE 1993



UFO HIGHBAY

OLE UFO HB 100W | OLE UFO HB 150W | OLE UFO HB 200W

Our OLE UFO HB is safe, reliable and flexible solution that comes in different power rating requirement. Its elegant design guarantees a perfect fit in any high ceiling corridor, multipurpose hall, warehouse and factory. Its water tight design prevent insects from entering the highbay. Quick and easy installation.

Benefits

- Safe
- Reliable
- Flexible



OVERSEA LIGHTING & ELECTRIC (M) SDN. BHD. (272782-K)

Lot 6595, Jalan KPB12B, Kawasan Industri Kampung Baru Balakong, 43300 Seri Kembangan, Selangor Darul Ehsan, Malaysia.

Tel : (603) 8964 1878, 8964 1888, 8964 1899 Fax : (603) 8964 1868

Email : info@oversealighting.com Website : www.oversealighting.com

© 2018 Oversea Lighting. All rights reserved. Oversea Lighting reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

HIGHBAY
OLE UFO HB
100W

Features

- Energy-efficient lighting for industrial and commercial applications
- Maximised savings in energy and maintenance costs
- Long lifetime

Application


- High ceiling corridor
- Multipurpose hall
- Warehouse
- Factory



Technical Data

Optical Parameters	LED Chip	: SMD
	Luminous Flux	: 11,000 lm
	Light Efficiency	: 110 lm/w
	CRI	: ≥80
	Beam Angle	: 45° (Standard) 120° (Optional)
	Color Temperature (CCT)	: Warm White / Neutral White / Cool White
Electrical Parameters	Input Voltage	: AC 220~240V
	Input Current	: 0.43A
	Power Frequency	: 50 / 60Hz
	Power Consumption	: 100W
	Power Factor	: ≥0.95
	Total Harmonic Distortion	: ≤20%
General Specifications	Lifetime	: ≥50000 Hrs
	IP Protection	: IP65
	Working Humidity	: 15%~90%RH
	Working Temperature	: -30°C~+55°C
	Storage Temperature	: -40°C~+65°C
	HID Replacement	: 150W-250W
	Material	: Die-Cast Aluminum
	Lens Material	: PC
	Finishing	: Black PE Powder Coated
Net Weight		: 3.1kg
Package Dimensions		: 1 piece/package: L310mm×W310mm×H150mm

Dimension

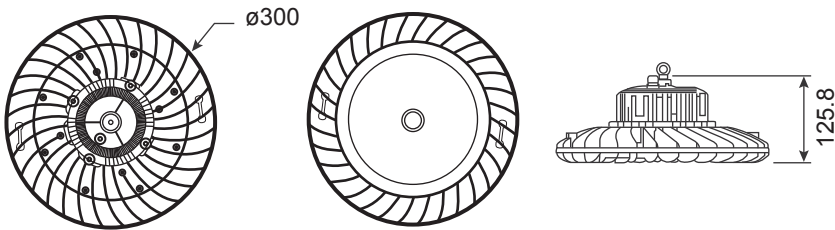

HIGHBAY
OLE UFO HB
150W

Features

- Energy-efficient lighting for industrial and commercial applications
- Maximised savings in energy and maintenance costs
- Long lifetime

Application


- High ceiling corridor
- Multipurpose hall
- Warehouse
- Factory



Technical Data

Optical Parameters	LED Chip	: SMD
	Luminous Flux	: 16,500 lm
	Light Efficiency	: 110 lm/w
	CRI	: ≥80
	Beam Angle	: 60° (Standard) 90°, 120° (Optional)
	Color Temperature (CCT)	: Warm White / Neutral White / Cool White
Electrical Parameters	Input Voltage	: AC 220~240V
	Input Current	: 0.65A
	Power Frequency	: 50 / 60Hz
	Power Consumption	: 150W
	Power Factor	: ≥0.95
	Total Harmonic Distortion	: ≤20%
General Specifications	Lifetime	: ≥50000 Hrs
	IP Protection	: IP65
	Working Humidity	: 15%~90%RH
	Working Temperature	: -30°C~+55°C
	Storage Temperature	: -40°C~+65°C
	HID Replacement	: 250W
	Material	: Die-Cast Aluminum
	Lens Material	: PC
	Finishing	: Black PE Powder Coated
	Net Weight	: 3.7kg
Package Dimensions		: 1 piece/package: L350mm×W350mm×H150mm

Dimension

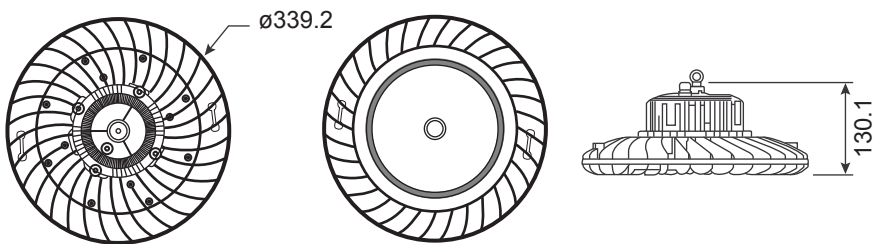

HIGHBAY
OLE UFO HB
200W

Features

- Energy-efficient lighting for industrial and commercial applications
- Maximised savings in energy and maintenance costs
- Long lifetime

Application

- High ceiling corridor
- Multipurpose hall
- Warehouse
- Factory



Technical Data

Optical Parameters	LED Chip	: SMD
	Luminous Flux	: 22,000 lm
	Light Efficiency	: 110 lm/w
	CRI	: ≥80
	Beam Angle	: 90°(Standard) 45°, 120° (Optional)
	Color Temperature (CCT)	: Warm White / Neutral White / Cool White
Electrical Parameters	Input Voltage	: AC 220~240V
	Input Current	: 0.87A
	Power Frequency	: 50 / 60Hz
	Power Consumption	: 200W
	Power Factor	: ≥0.95
	Total Harmonic Distortion	: ≤20%
General Specifications	Lifetime	: ≥50000 Hrs
	IP Protection	: IP65
	Working Humidity	: 15%~90%RH
	Working Temperature	: -30°C~+55°C
	Storage Temperature	: -40°C~+65°C
	HID Replacement	: 400W
	Material	: Die-Cast Aluminum
	Lens Material	: PC
	Finishing	: Black PE Powder Coated
	Net Weight	: 5.3kg
	Package Dimensions	: 1 piece/package: L390mm×W390mm×H175mm

Dimension

