


Recessed step light

OLE DHK 9231



Power	3W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Clear Tempered Glass
Gasket	Made of Thermostable Silica Gel to Improve Protection Class
Carton	390*390*245mm (18 pcs per carton-23kg/carton)
Efficiency	40lm/W



Recessed step light

OLE DHK 9232




Power	8W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Clear Tempered Glass
Gasket	Made of Thermostable Silica Gel to Improve Protection Class
Carton	390*390*290mm (8 pcs per carton-17.5kg/carton)
Efficiency	40lm/W



Recessed step light

OLE DHK 9233


Power	3W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Clear Tempered Glass
Gasket	Made of Thermostable Silica Gel to Improve Protection Class
Carton	390*390*245mm (16 pcs per carton-15kg/carton)
Efficiency	40lm/W



Recessed step light

OLE DHK 9234



Power	3W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Clear Tempered Glass
Gasket	Made of Thermostable Silica Gel to Improve Protection Class
Carton	390*390*245mm (16 pcs per carton-15kg/carton)
Efficiency	40lm/W



Recessed step light

OLE DH 3805




Power	6W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Aluminum
Diffuser	Glass
Finishing	Matt Black UV-Proof Powder Coating
Carton	490*430*510mm (12 pcs per carton-16kg/carton)
Efficiency	40lm/W



Recessed step light

OLE DH 3806



Power	6W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Aluminum
Diffuser	Glass
Finishing	Matt Black UV-Proof Powder Coating
Carton	540*420*290mm (6 pcs per carton-17kg/carton)
Efficiency	40lm/W



Recessed step light

OLE DH 3704


Power	6W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Aluminum
Diffuser	Glass
Finishing	Matt Black UV-Proof Powder Coating
Carton	425*265*290mm (10 pcs per carton-7.2kg/carton)
Efficiency	40lm/W




Recessed step light

OLE DH 3705

Power	6W
CCT	3000K
Protection	IP65
Input Voltage	AC240V
Material	Aluminum
Diffuser	Glass
Finishing	Matt Black UV-Proof Powder Coating
Carton	425*265*290mm (10 pcs per carton-7.2kg/carton)
Efficiency	40lm/W

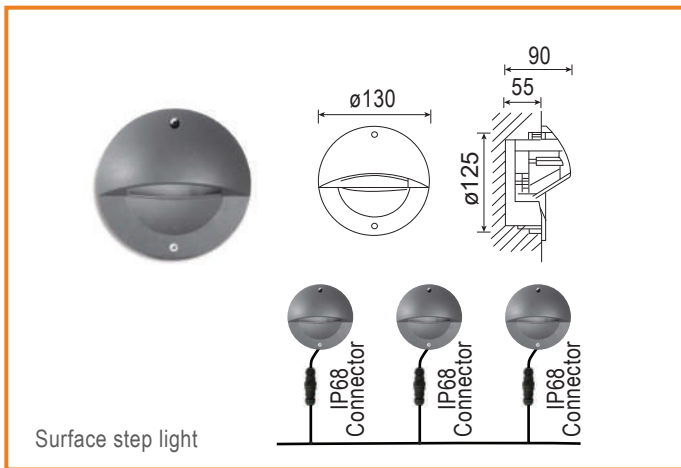**OLE DHK 9242**


Power	3W
CCT	3000K / 6000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Glass / PMMA
Gasket	Made of Thermostable Silica Gel to Improve Protection Class
Carton	140*140*125mm (12 pcs per carton-7kg/carton)
Efficiency	40lm/W

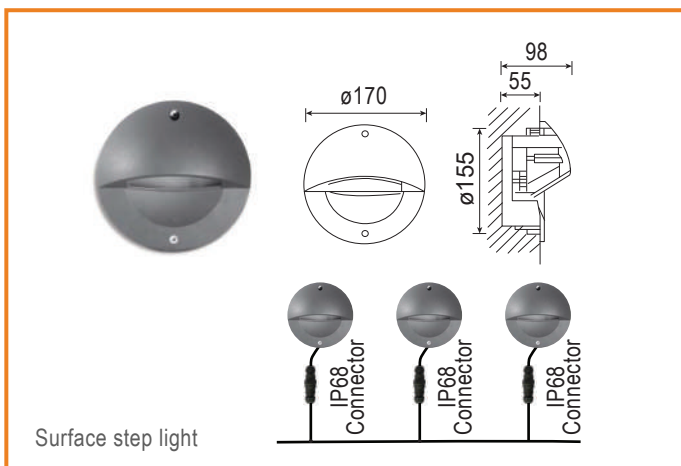**OLE DHK 9243**

Power	8W
CCT	3000K / 6000K
Protection	IP65
Input Voltage	AC240V
Material	Body Made of Cast Aluminum with Treatment of Corrosion Protection and UV-Proof Powder Coating
Diffuser	Glass / PMMA
Gasket	Made of Thermostable Silica Gel to Improve Protection Class
Carton	450*305*280mm (8 pcs per carton-6kg/carton)
Efficiency	40lm/W

**OLE DH 5241**

Power	4W
CCT	3000K / 4000K / 6000K
Protection	IP65
Input Voltage	DC24V
Material	UV Powder Coated Die-Cast High Quality Aluminum Body
Beam Angle	15° - 90°
Diffuser	Glass
Gasket	Silicone Rubber Gasket and Stainless Steel Screws
Carton	330*560*450mm (30 pcs per carton-18kg/carton)
Efficiency	40lm/W

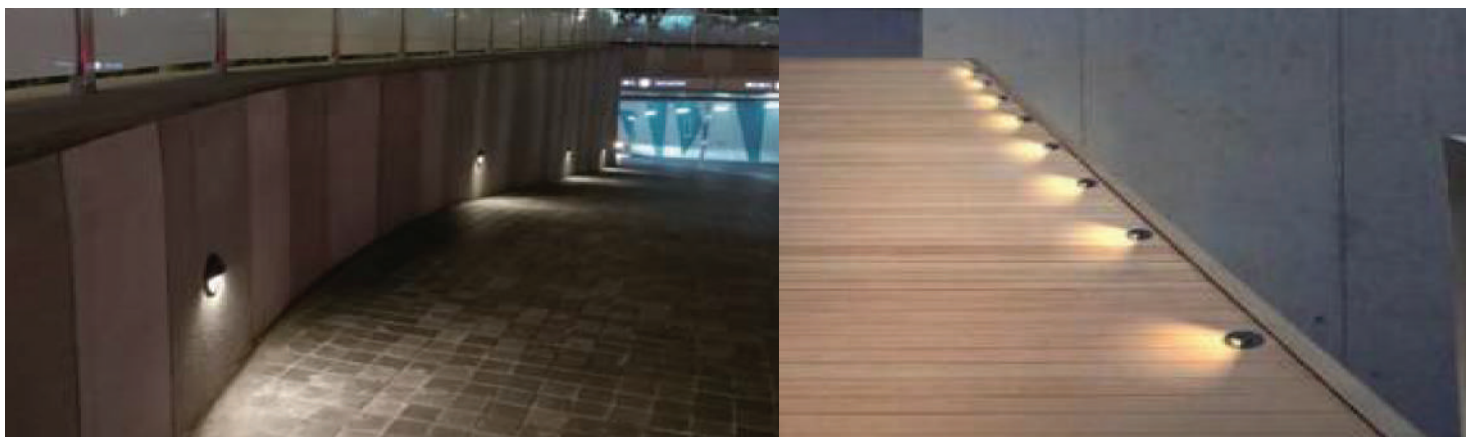

**OLE DHZ-1506-3W**

Power	3W
Color	RGB
Protection	IP65
Input Voltage	DC240V
Material	Aluminum
Diffuser	Glass
Finishing	Grey UV-proof powder coating
Control	DMX512

**OLE DHZ-1506-15W**

Power	15W
Color	RGB
Protection	IP65
Input Voltage	DC240V
Material	Aluminum
Diffuser	Glass
Finishing	Grey UV-proof powder coating
Control	DMX512

