




Dimension

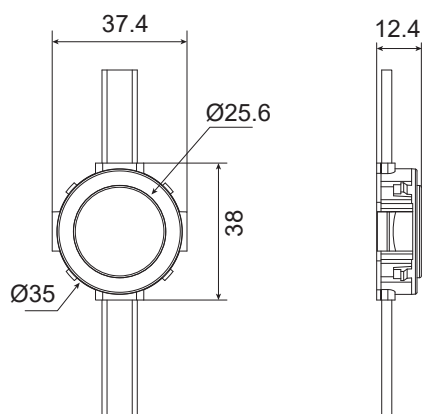


Pixel light OLE RDO-35

CCT	2700K-6500K	RGB	RGBW
Power	0.7W, 1.4W	0.7W, 1.4W	0.9W, 1.8W
Control	DMX512	DMX512	DMX512
Beam Angle	120°	120°	120°
Protection	IP67	IP67	IP67
Voltage	DC12/24V	DC12/24V	DC12/24V
Weight	30G	30G	30G
Efficacy	70 lm/W	15 lm/W	40 lm/W
IK Rating	IK10	IK10	IK10
Cover	Optional for transparent / milky / frosted cover		




Dimension

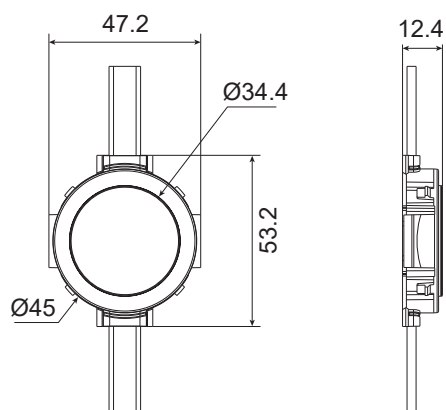


Pixel light OLE RDO-45

CCT	2700K-6500K	RGB	RGBW
Power	1.4W, 1.8W, 2.4W	1.4W, 1.8W, 2.4W	1.8W, 3W
Control	DMX512	DMX512	DMX512
Beam Angle	120°	120°	120°
Protection	IP67	IP67	IP67
Voltage	DC12/24V	DC12/24V	DC12/24V
Weight	40G	40G	40G
Efficacy	70 lm/W	15 lm/W	40 lm/W
IK Rating	IK10	IK10	IK10
Cover	Optional for transparent / milky / frosted cover		

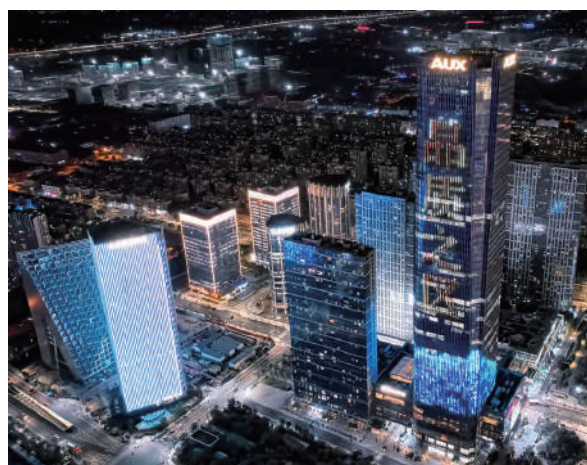



Dimension

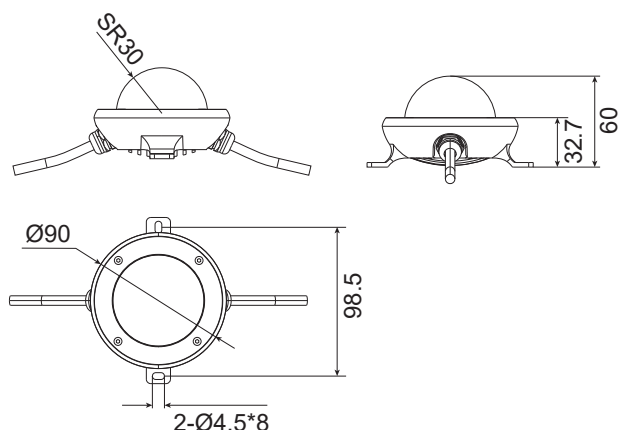


Pixel light OLE RDO-90

CCT	2700K-5700K	RGB	RGBW
Power	3W, 6W	3W, 6W	3W, 6W
Control	DMX512	DMX512	DMX512
Beam Angle	90°, 120°, 150°	90°, 120°, 150°	90°, 120°, 150°
Protection	IP66	IP66	IP66
Voltage	DC24V	DC24V	DC24V
Weight	200G	200G	200G
Efficacy	80, 58 lm/W	15, 10 lm/W	31, 20 lm/W
Cover	Optional for transparent / milky / diamond / frosted cover		




Dimension

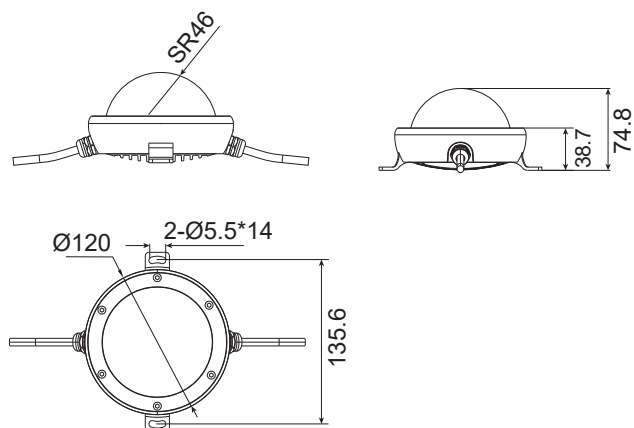


Pixel light OLE RDO-120

CCT	2700K-6500K	RGB	RGBW
Power	7W, 10W	7W, 10W	7W, 10W
Control	DMX512	DMX512	DMX512
Beam Angle	120°, 150°	120°, 150°	120°, 150°
Protection	IP66	IP66	IP66
Voltage	DC24V	DC24V	DC24V
Weight	500G	500G	500G
Efficacy	80 lm/W	20, 15 lm/W	40, 27 lm/W
Cover	Optional for transparent / milky / diamond / frosted cover		

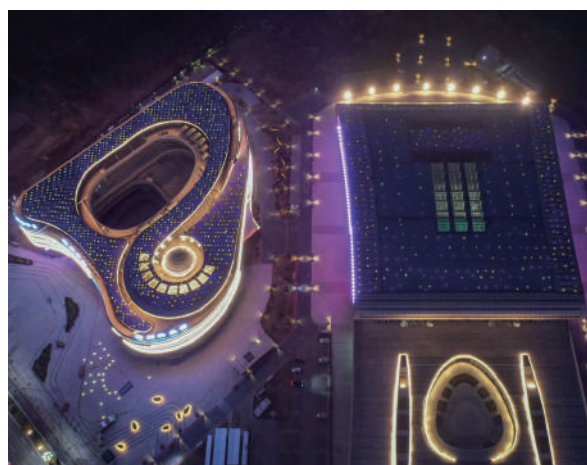



Dimension

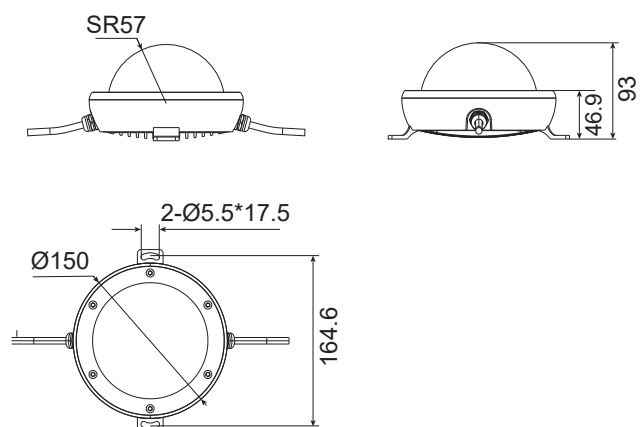

Pixel light OLE RDO-150

CCT	2700K-5700K	RGB	RGBW
Power	12W, 15W	10W, 12W	10W, 12W
Control	DMX512	DMX512	DMX512
Beam Angle	120°, 150°	120°, 150°	120°, 150°
Protection	IP66	IP66	IP66
Voltage	DC24V	DC24V	DC24V
Weight	500G	500G	500G
Efficacy	70, 80 lm/W	15 lm/W	40 lm/W
Cover	Optional for transparent / milky / diamond / frosted cover		

