




IP65

IK08

**90Vac
305Vac**

**CRI
>70**

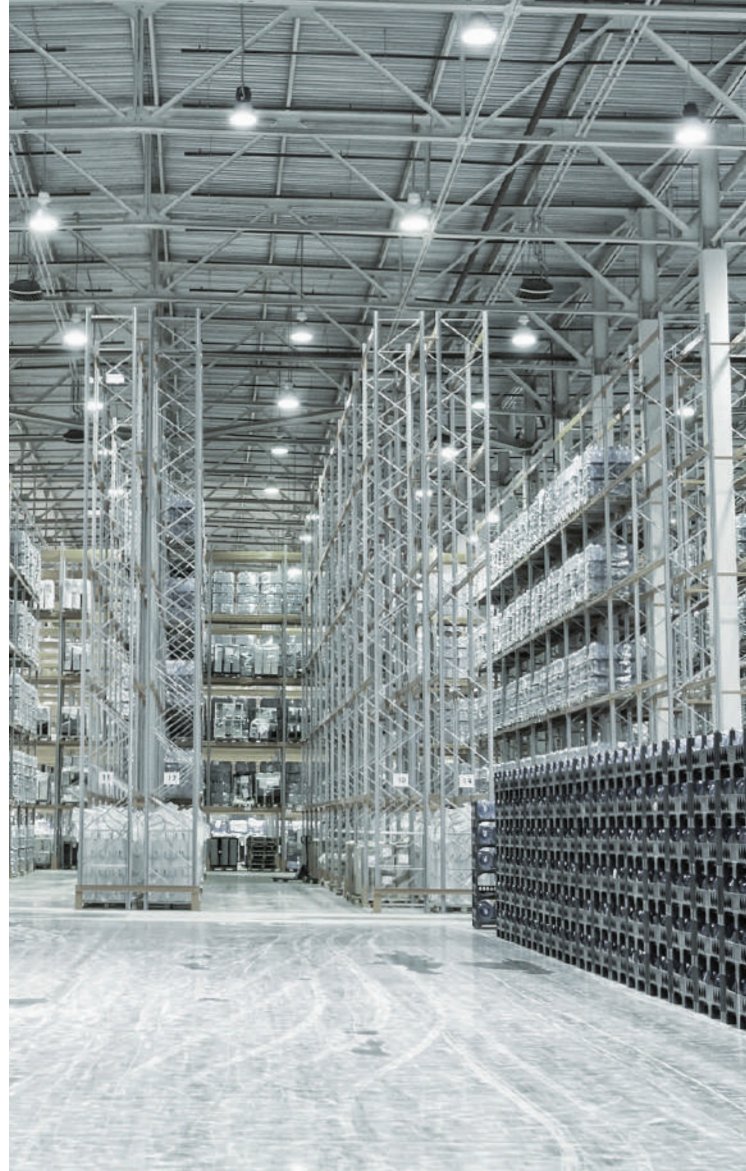

Features

Lumen Maintenance	: L70 @ 50,000 hours
Working Temperature	: -30°C ~ 45°C
Working Humidity	: 15%-90%
Power Factor	: >0.95 at Full Load

Advantages

- Available to install bracket for wall mounting.
- Ring outfit mounting method for easy installation at high mounting areas.

Application


Applicable for High Ceiling Corridor, Multipurpose Hall, Warehouse and Factories.

Specifications

Model No.	Power	Net weight	Gross weight	CCT	Efficacy	Lumen
OLE HB-20-300W	300W	3.66kg	4.66kg	3000K 4000K 5000K 5700K	140 lm/W 170 lm/W	42000 lm 51000 lm
OLE HB-20-400W	400W	12.01kg	13.11kg	3000K 4000K 5000K 5700K	140 lm/W 170 lm/W	56000 lm 68000 lm
OLE HB-20-500W	500W	12.01kg	13.11kg	3000K 4000K 5000K 5700K	140 lm/W 170 lm/W	70000 lm 85000 lm

** Reported CCT and System Lumen may have a tolerance of +/-10%*

Photometric Data

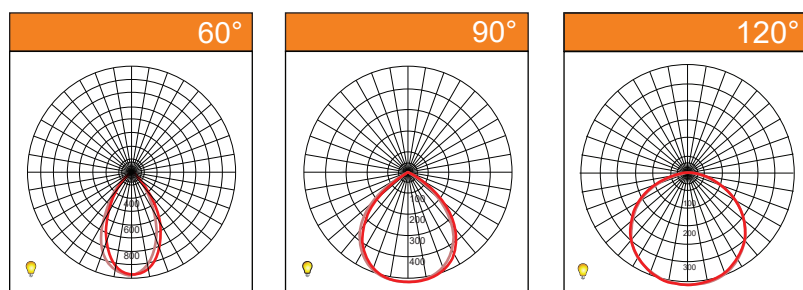

Feature Diagram





Ring Outfit Mounting



Wall Bracket Mounting

Dimensions

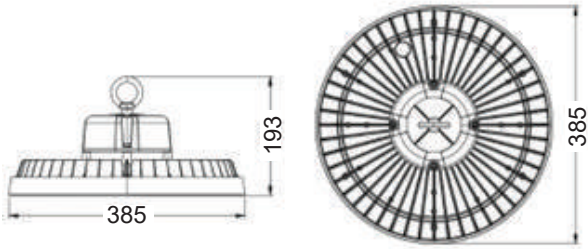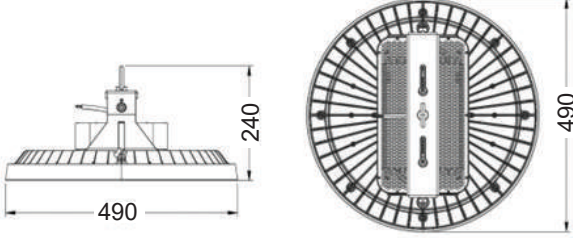OLE HB-20-300W	OLE HB-20-400W
Packing Size: (L)410x(W)410x(H)150 	Packing Size: (L)520x(W)520x(H)235 
OLE HB-20-500W	
Packing Size: (L)520x(W)520x(H)235 