



OLE HB-03



IP65

IK08

100Vac
277Vac

CRI
>70



Features

Lumen Maintenance : L70 @ 50,000 hours
Working Temperature : -30°C ~ 40°C
Working Humidity : 15%-90%
Power Factor : >0.95 at Full Load
Material : Aluminum + PC

Driver : Moso Standard/Optional others
Output Voltage : 180V-260V
Driver Type : Constant current (CC)
Surge Protection : 4KV

Advantages

- Wide wattage range from 80W - 280W.
- Private heavy design mold appearance, multiple molds, high quality.
- Optimized optical design, the light output is uniform.

Application


Applicable for Tunnel Lighting, ideal for Industrial Plants, Production Workshops, Supermarkets, Sports and Entertainment Venues, Warehouses and etc.

Specifications

Model No.	Power	Net weight	Gross weight	CCT	Efficacy	Lumen
OLE HB-03-80W	80W	6.76kg	7.9kg	3000K-5700K	150 lm/W	12000 lm
OLE HB-03-100W	100W	6.76kg	7.9kg	3000K-5700K	150 lm/W	15000 lm
OLE HB-03-120W	120W	10kg	11.44kg	3000K-5700K	150 lm/W	18000 lm
OLE HB-03-150W	150W	10kg	11.44kg	3000K-5700K	150 lm/W	22500 lm
OLE HB-03-180W	180W	10.52kg	12.08kg	3000K-5700K	150 lm/W	27000 lm
OLE HB-03-200W	200W	10.52kg	12.08kg	3000K-5700K	150 lm/W	30000 lm
OLE HB-03-220W	220W	10.52kg	12.08kg	3000K-5700K	150 lm/W	33000 lm
OLE HB-03-250W	250W	10.52kg	12.08kg	3000K-5700K	150 lm/W	37500 lm
OLE HB-03-280W	280W	15.2kg	17.2kg	3000K-5700K	150 lm/W	42000 lm


** Reported CCT and System Lumen may have a tolerance of +-10%*

Photometric Data

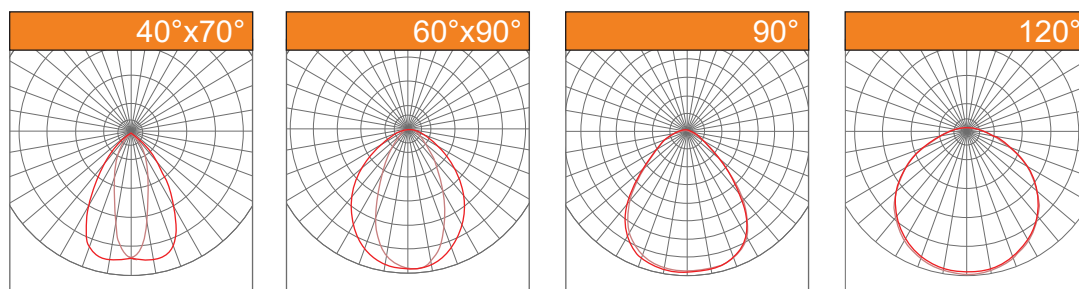

Feature Diagram

1. Microwave sensor (3-15m)

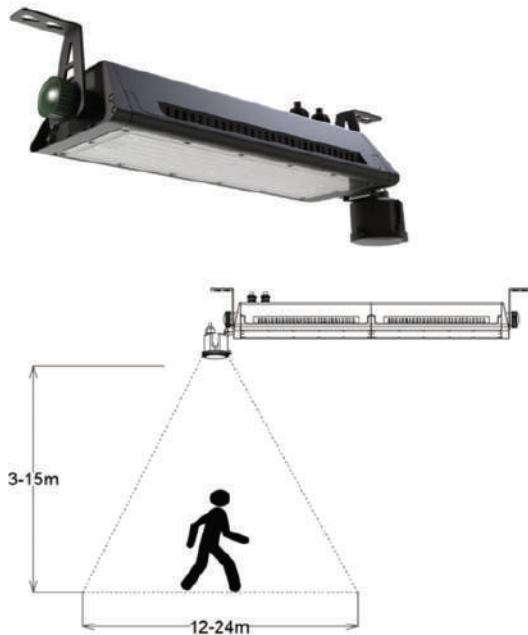

2. Modular assembling (3 modules)



Dimensions

OLE HB-03-80W / 100W	OLE HB-03-120W / 150W / 180W / 200W
Packing Size: (L)597x(W)411x(H)215	Packing Size: (L)967x(W)411x(H)215
OLE HB-03-220W / 250W / 280W	
Packing Size: (L)1337x(W)411x(H)215	