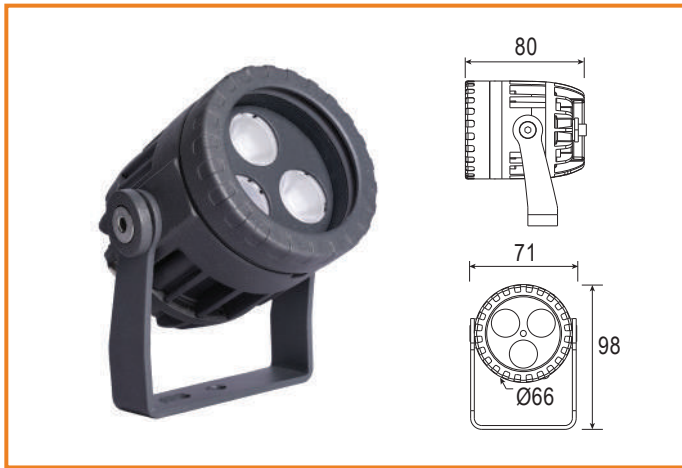
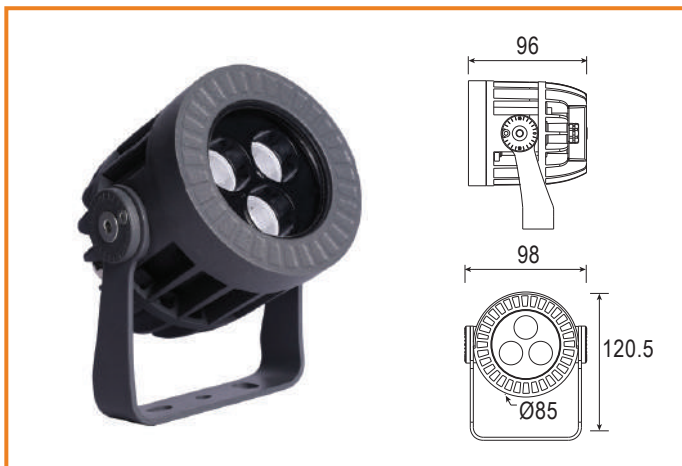


**OLE-T541301**

Power	6W, 8W, 9W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	3
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541302**

Power	9W, 12W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	3
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541303**

Power	12W, 15W, 18W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	6
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541304**

Power	20W, 21W, 24W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	9
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541305**

Power	36W, 48W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	18
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541307**

Power	72W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	36
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541101**

Power	9W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	4
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541102**

Power	12W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	5
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541103**

Power	18W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	9
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541104**

Power	24W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	12
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541105**

Power	36W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	16
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

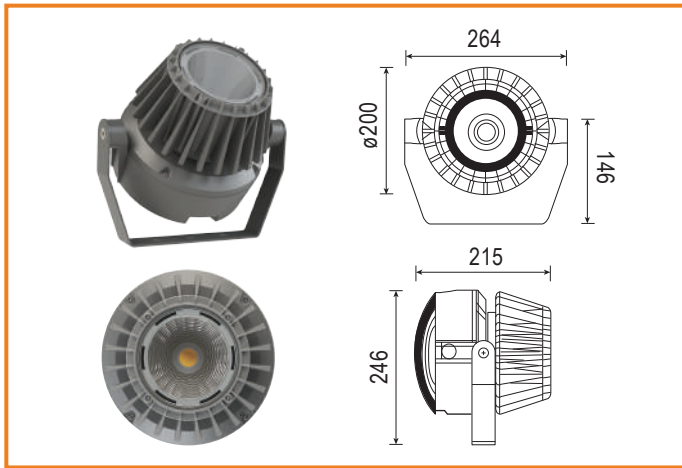
**OLE-T541106**

Power	48W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	24
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541107**

Power	72W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	8°, 10°, 20°, 33°, 43°
Led Quantity	36
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit



**OLE L-PRO 7228**

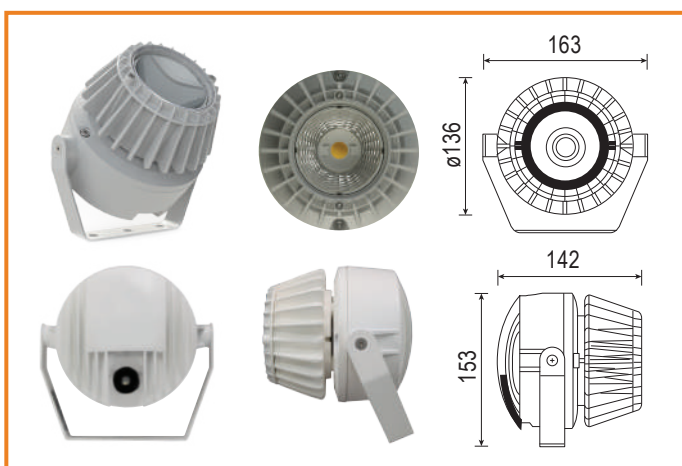
Power	38W	55W
Input Current	0.16A	0.23A
Lumen	3800 lm	5500 lm
CCT	2200K-3500K / 3500K-4500K / 4500K-5500K	
Beam Angle	15°, 23°, 46°	
Protection	IP65	
Input Voltage	AC240V	
Material	Die-Cast Aluminum Housing ADC12	
Reflector	High Polished PC, Built-In Constant Current Driver	
Weight	4.5 kg	
Carton Size	280*213*232mm (1pc per carton - 4.9kg/carton)	

**OLE L-PRO 7248**

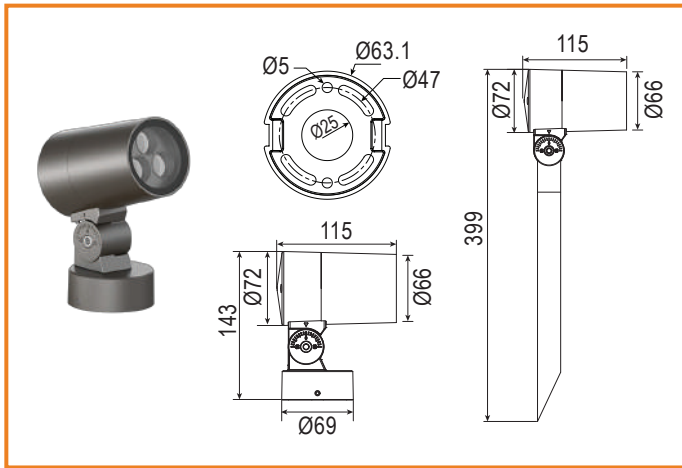
Power	55W	
Input Current	0.23A	
Lumen	5500 lm	
CCT	2200K-3500K / 3500K-4500K / 4500K-5500K	
Beam Angle	15°, 23°, 46°	
Protection	IP65	
Input Voltage	AC240V	
Material	Die-Cast Aluminum Housing ADC12	
Reflector	High Polished PC, Built-In Constant Current Driver	
Weight	5 kg	
Carton Size	225*225*380mm (1pc per carton - 5.5kg/carton)	

**OLE Spot Midi**

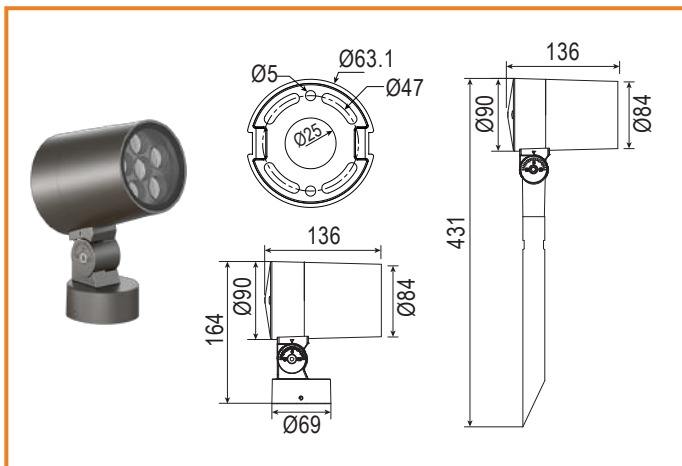
Power	12W	26W
Input Current	0.05A	0.11A
Lumen	1200 lm	2600 lm
CCT	2200K-3500K / 3500K-4500K / 4500K-5500K	
Beam Angle	46°	
Protection	IP65	
Input Voltage	AC240V	
Material	Die-Cast Aluminum Housing ADC12	
Reflector	High Polished PC, External Driver	
Weight	1.4 kg	
Carton Size	195*195*120mm (1pc per carton - 1.5kg/carton)	

**OLE L-PRO 7217**

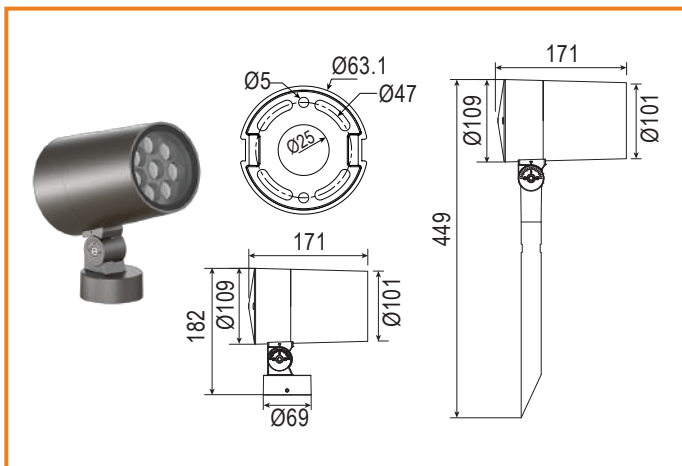
Power	12W	26W
Input Current	0.05A	0.11A
Lumen	1200 lm	2600 lm
CCT	2200K-3500K / 3500K-4500K / 4500K-5500K	
Beam Angle	18°, 30°, 55°, 73°	
Protection	IP65	
Input Voltage	AC240V	
Material	Die-Cast Aluminum Housing ADC12	
Reflector	High Polished PC, Built-In Constant Current Driver	
Weight	2.4 kg	
Carton Size	160*170*180mm (1pc per carton - 2.4kg/carton)	

**OLE-T541331**

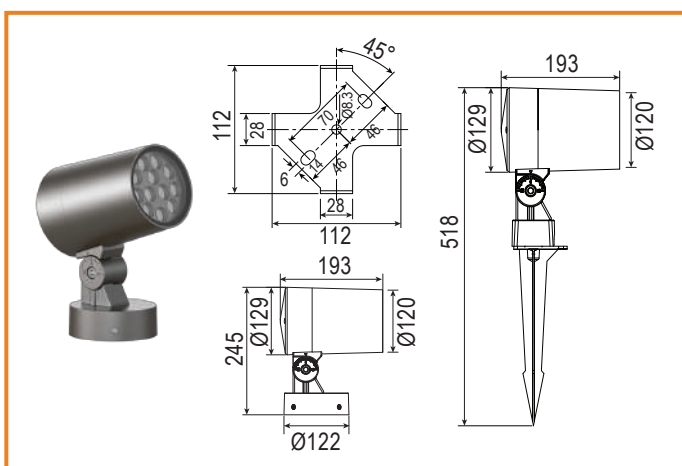
Power	9W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	3
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541332**

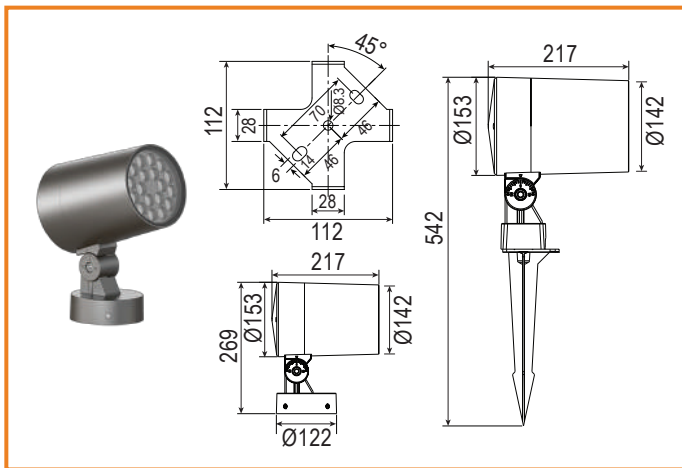
Power	18W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	6
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541233**

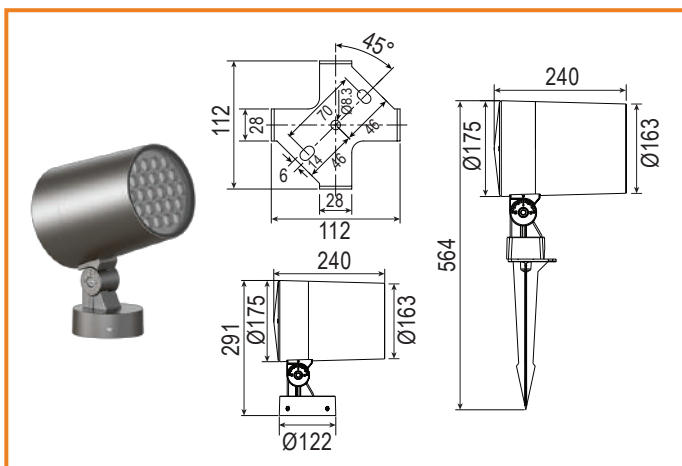
Power	24W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	15°, 20°, 30°, 40°, 60°
Led Quantity	9
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541334**

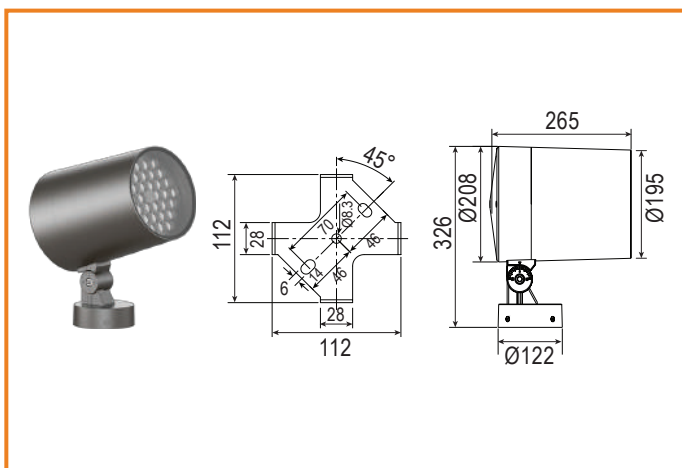
Power	36W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	15°, 20°, 30°, 40°, 60°
Led Quantity	12
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541335**

Power	48W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	18
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541336**

Power	60W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	10°, 15°, 30°, 45°, 60°
Led Quantity	24
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

**OLE-T541337**

Power	80W
Input Voltage	DC24V / AC220V
CCT	3000K, 4000K, RGB, RGBW
Beam Angle	15°, 20°, 30°, 40°, 60°
Led Quantity	36
Lens	PMMA, Up to 90% efficiency
Working Method	On/Off, DMX512, PWM, Triac, 1-10V
Diffuser	4mm Tempered Glass
Protection	IP66
Material	Die-cast aluminum ADC12
Accessories	Surface mounted bracket kit

Available Installation for T54133X Series